

Product catalogue 2023



düvelsdorf

Machinery and equipment for agriculture and forestry

Because perfect grassland
begins with technology.



You can find our machinery as well as a lot of useful information about grassland maintenance in our complete range of grassland maintenance technology. Please feel free to contact us or your dealer.

düvelsdorf

GRASSLAND MAINTENANCE TECHNOLOGY | Complete Range



QUALITY FROM OUR OWN PRODUCTION EXPERT, EXACTING AND RELIABLE

The düvelsdorf company is your expert partner for the development, manufacture and distribution of machinery and equipment for agriculture, municipal services and industry.

In more than 90 years, düvelsdorf has developed into an agricultural machinery manufacturer operating throughout Europe. The machines stand out in particular for their long service life and practical handling.

With our own factory in Eastern Europe, each production step can be closely monitored, thus guaranteeing very high quality.

If you have any questions about the products, please contact your local düvelsdorf dealer, who will be delighted to help you.

Sincerely your
düvelsdorf Team

Key

Our products' special features are illustrated by icons next to the product name.



Powder coating



NEW to the range



Product video on the düvelsdorf YouTube channel

New products 6

Grassland maintenance 10

GREEN.RAKE mini 10

Grassland harrow 2,00 m, 3,00 m 11

Grassland harrow 4,00 m, 5,00 m .. 12

Grassland harrow 6,00 m, 8,00 m 13

Grassland harrow with tine section... 14

Grassland harrow LDO 15

Grassland harrows HDO 16

Grassland harrows HD..... 17

Grassland harrow accessories 18

Rollers 23

GREEN.ROLLER classic..... 23

GREEN.ROLLER classic chassis 24

GREEN.ROLLER eco 25

Lawn roller 25

Front packer 27

TERRA.ROLLER eco..... 28

Mowers and mulchers 30

Drum mower 30

Swing arm mower 31

Silage technology 32

Silage roller 32

Maize leveller 33

Telescopic maize leveller..... 34

Bale wrapper..... 35

Buckets and forks. 36

Manure fork with pawl attachment .. 36

Soil bucket with pawl attachment..... 36

Light goods bucket EURO..... 37

Soil bucket EURO 38

Bulk material bucket EURO..... 39

Manure fork EURO..... 39

Manure and silage fork EURO 40

Manure bucket EURO 41

Power grab bucket EURO 42

Soil bucket for farmyard loader 44

Light goods bucket for farmyard loader. 45

Fork-and-grab for farmyard loader.... 46

Tipping bucket 47

Bale and load transport 48

Round bale gripper 48

Universal bale gripper 49

Round bale forks 50

Bale cutting fork..... 53

Bale cutting bucket..... 53

Bale transport fork..... 54

Pallet fork 57

Pallet thumb..... 58

Crate rotating device 58

Big Bag holder 59

Adapters and tractor triangle

hitches 59

Three-point attachment with
trailer-hitch ball 59

Tractor triangle hitch 60

Triangle hitch 60

Power grab bucket attachment 60

EURO adapter for forklift attachment .. 60

Three-point attachment for EURO..... 61

Front loader adapter 61

2.5 t adapter 61

Adapter for Weidemann..... 62

Adapter without attachment 62

Adapter for Schäffer 62

Snow blades and snow ploughs 64

Municipal snow blade 64

Contents	Page	Contents	Page
Forklift snow blade	65	Individually welded attachments	109
Comfort snow blade	66	D-LOCK bolted attachments	110
Snow blade AFS	67	Index	112
Municipal snow plough.....	68		
Snow plough.....	69		
Rubber blade	70		
Fodder clearing machine	77		
Box scraper	78		
Riding arena surface rake	79		
Sweeping machines			
and brooms	80		
Weed sweeper.....	80		
Stratos sweeping machines			
for tractors	82		
Accessories for Stratos sweeping			
machines.....	84		
Standard sweeper	87		
Levelling blade	88		
Soil auger	89		
Concrete mixer	90		
Pasture gates and pasture feeders	91		
Transport boxes	93		
Rear containers	95		
Work platforms	101		
Screw conveyor	102		
Forestry devices	103		
Log grippers	103		
Timber grab	104		
Reinforced concrete weights ...	105		

NEW PRODUCTS

Power grab bucket compact
p. 43



Light goods bucket compact | p. 43



Forklift snow blade | p. 65



Municipal snow blade | p. 64

D-LOCK
Bolted attachments
see page 110 / 111



Rubber blade D-LOCK | p. 71

NEW PRODUCTS

Rubber blade 3.00 m, pendulum-mounted
p. 74



Rubber blade 3.60 m, COMBI | p. 73



Rear containers HD | p. 95



Various new reinforced concrete weights | from p. 105



The **GREEN.RAKE** mini stands out with its compact size of 1.50 m or 2.00 m. The **GREEN.RAKE** mini is ideal for use in municipal areas or in fruit-growing and viticulture. It flattens piles of earth and ventilates the turf in various stages, thereby making it the perfect machine for grassland maintenance e.g. in tree plantations or parks.

- Attachment category CAT 1
- Adjustable tine section
- 10 mm tines
- 83 mm tine spacing
- Powder-coated frame
- Tine guard

Designation	kg	Article no.
GREEN.RAKE mini 1.50 m	153	2613150
GREEN.RAKE mini 2.00 m	178	2613200



Grassland harrow 2.00 m, 3-row



Grassland harrow 3.00 m, 3-row

- Optimum ground adjustment
- Robust hinge technology
- Quickly ready for work
- Full number of cast stars to make use of the complete working width
- Minimised wear of steel rings due to optimised shape of cast stars
- Combination stars made of high-quality grey cast iron
- Powder-coated frame
- Transport width 2.00 m: 2.10 m
- Transport width 3.00 m: 1.75 m
- Attachment category CAT 1

Designation	kg	Article no.
Grassland harrow 2.00 m, 3-row	176	2517200
Grassland harrow 3.00 m, 3-row	220	2517300



Grassland harrow 4.00 m, 3-row

- Grassland harrow 4.00 m
3-row attachment in CAT 1
- as of grassland harrow 4.00 m
4-row attachment in CAT 2
- Hydraulic actuation for folding
the side elements incl. safety
lock possible from a harrow of 4.00 m
- Transport width: 2.10 m



Grassland harrow 5.00 m, 4-row

Designation	kg	Article no.
Grassland harrow 4.00 m, 3-row	286	2517400
Grassland harrow 4.00 m, 4-row	335	2517406
Grassland harrow 5.00 m, 4-row	400	2517506
Grassland harrow 5.00 m, 4-row, hydraulic	450	2517508
Hydraulic operation grassland harrow 4.00 / 5.00 m	50	2516100



Grassland harrow 6.00 m, 4-row

- 4-row
- Optimum ground adjustment
- Robust support frame
- Powder-coated or galvanised frame
- Hydraulic hinge
- Robust hinge technology
- Quickly ready for work
- Safety lock for safe road transport
- Robust 3-point hitch CAT 2
- Full number of cast stars to make use of the complete working width
- Minimised wear of steel rings due to optimised shape of cast stars
- Combination stars made of high-quality grey cast iron
- Transport width: 2.90 m



Grassland harrow 8.00 m, 4-row, hydraulic hinge



Grassland harrow 6.00 m, 4-row galvanised

Designation	kg	Article no.
Grassland harrow 6.00 m, 4-row	650	2517606
Grassland harrow 6.00 m, 4-row galvanised	650	2520606
Grassland harrow 8.00 m, 4-row	814	2517806
Lighting for grassland harrow, only with hydr. operation	20	2519700

Note: Delivered unassembled. Assembly time approx. 1 hour.

Grassland maintenance

Rollers

Mowers / Mulchers

Silage technology

Buckets / Forks



Grassland harrow 6.00 with tine section

- Towing and raking in one operation
- Harrow levels molehills and other unevenness
- Tine section removes moss and aerates firm soil
- Tine section can be retrofitted for grassland harrows 6.00 m, 4-row built in 2012 or later

Technical data	
Working width	6.00 m
Tine spacing	120 mm
Bar spacing	300 mm
Tine diameter	10 mm
Number of tines	51
Setting positions	4

Designation	kg	Article no.
Grassland harrow 6.00 m, 4-row with tine section	882	2521100
Tine section for grassland harrow 6.00 m	232	2521000
Lighting for tine section	14	2521150

Note: Delivered unassembled. Assembly time: approx. 2-3 hours.



LDO 6.00 m

The grassland harrow LDO with 6.00 m working width and 4-row harrow mesh is a further development of the tried and tested 6.00 m grassland harrow. It is open at the rear for even better adjustment to the ground. The solid hinges at the front and rear guarantee a high level of stability.

- Robust 3-point attachment CAT 2
- 4-row
- Light frame
- Powder-coated frame
- Hydraulic hinge
- Safety lock for safe road transport
- Transport width: 2.90 m

Designation	kg	Article no.
Grassland harrow LDO 6.00 m, 4-row	610	2517610

Note: Delivered unassembled. Assembly time approx. 1 hour.

Grassland maintenance

Rollers

Mowers / Mulchers

Silage technology

Buckets / Forks



HDO 6.00 m, unfolded

The grassland harrow HDO is a grassland harrow based on the HD harrow. The frame's open construction ensures a particularly good adjustment to the ground to ensure excellent flattening of molehills, cow pat and other residues. The grassland harrow HDO is equipped with the heavy 4.5 kg HD stars.

- Robust angle iron frame
- Powder-coated frame
- Robust 3-point attachment CAT 2
- Large hinges
- Safety lock for safe road transport
- Heavy 4.5 kg HD stars
- Transport width: 3.00 m

Optional

- Seeders
- Tread
- Skid
- LED lighting set

Designation	kg	Article no.
Grassland harrow HDO 6.00 m	1080	2615600
Grassland harrow HDO 8.00 m	1230	2615800
Mounting kit seeder HD/HDO	80	2618100
Skid HD/HDO	6	2618200
LED lighting set	30	2618109

Note: Delivered unassembled. Assembly time approx. 5 hours.
Assembly optional: €300.00 plus freight surcharge for an assembled 8.00 m harrow of €300.00



Grassland harrow HD 6.00 m, 4-row

The grassland harrow HD has a particularly robust frame. The robust joints, the strong 3-point hitch and the large cylinders make the HD suitable for professional use. A safety lock comes as standard on the hydraulic cylinders to prevent the harrow from opening unintentionally when driving on the road.

The grassland harrow HD is equipped with 4.5 kg HD stars.

- Powder-coated frame
- Robust 3-point attachment CAT 2
- Large hinges
- Safety lock for safe road transport
- Heavy 4.5 kg HD stars
- Transport width: 3.00 m

Optional

- Seeders
- Tread
- Skid
- LED lighting set



HD star

Designation	kg	Article no.
Grassland harrow HD 6.00 m	1100	2614600
Grassland harrow HD 8.00 m	1250	2614800
Mounting kit seeder HD/HDO	80	2618100
Skid HD/HDO	6	2618200
LED lighting set	30	2618110

Note: Delivered unassembled. Assembly time: approx. 5 hours.
Assembly optional: €300.00 plus freight surcharge for an assembled 8.00 m harrow of €300.00



Spare mesh



Skid



Combination star



HD star

Designation	kg	Article no.
Mesh 2.00 m, 3-row	54	2518210
Mesh 3.00 m, 3-row	82	2518310
Mesh 4.00 m, 3-row	111	2518410
Mesh 5.00 m, 3-row	145	2518510
Mesh 6.00 m, 3-row	168	2518610
Mesh 4.00 m, 4-row	137	2518411
Mesh 5.00 m, 4-row	189	2518511
Mesh 6.00 m, 4-row	223	2518611
Mesh 8.00 m, 4-row	302	2518621
HD Mesh 6.00 m	306	2518612
HD Mesh 8.00 m	409	2518622
Combination star	2.2	2516005
HD star	4.5	2516010
Ring harrow mesh	0.55	2516020
Skid for grassland harrow 6.00 / 8.00 m	4.5	2518850

PHOTOGRAPHS FROM PRODUCTION



Grassland maintenance

Rollers

Mowers / Mulchers



Silage technology



Buckets / Forks



5 good reasons for maintaining grassland.

1 Grassland maintenance increases the basic feed quantity and quality.

2 Damaged grass cover can be regenerated with the right maintenance technology and thus avoid the need for new planting.

3 Raking and reseeding prevent the growth of unwanted, inferior quality grasses such as rough bluegrass, and enable the establishment of high-quality grasses and herbs.

4 Strong grass cover is more resistant to damage when it is driven over and during adverse weather conditions.

5 With an outlay of just €100/ha an economic surplus yield of €300 - €500/ha is possible through raking and reseeding.



Because perfect grassland begins with technology.

duvelsdorf

GRASSLAND MAINTENANCE TECHNOLOGY | Complete range

You can find our machinery as well as a lot of useful information about grassland maintenance in our complete range of grassland maintenance technology. Please feel free to contact us or your dealer.

Rakes and rollers for every application



GREEN.RAKE vario



GREEN.RAKE expert



TERRA.ROLLER expert



GREEN.RAKE combi



GREEN.RAKE classic



GREEN.ROLLER classic

Seeders



We have a range of seeder designs so we can provide the right machine for every application. There are differences in the number of outputs and their diameters, as well as in the blower drive unit and the resulting conveying capacity.

Three different controls are available for the seeders. The electric seeders (ES 8 Standard / ES 8 Turbo) are equipped with the Profi control. This allows the seeder to be switched on and off from the cab, the spread rate to be continuously adjusted and a calibration test to be carried out. The Profi Speed control is optionally available for the ES 8 Turbo, which enables speed-dependent sowing.

The **SEED.CON** control is available for all Turbo seeders.

This wireless control with intuitive user interface is controlled via your own smartphone or tablet.

All settings can be made either from the cab or directly next to the device. The control allows a speed-dependent regulation of the spread rate.



In addition to the use of a smartphone/tablet, operation (including parallel) can be executed via an ISOBUS terminal.



Grassland maintenance

Rollers

With the düvelsdorf **GREEN.ROLLER** classic meadow rollers, all components such as the unbraked/braked chassis as well as LED lighting can be retrofitted. Furthermore, the meadow rollers can be combined to form a coupled trailer.

- Robust frame made of 180 mm square tubing
 - Drum diameter approx. 1200 mm
 - Drum wall thickness min. 12 mm
 - Continuous shaft in the rolling element
 - Centre partition
 - 2 x water filler necks
 - Spherical roller bearings
 - Spring-loaded, adjustable scraper
 - Parking support, adjustable spindle
 - 2.70 m roller has a transport width of 3.00 m
 - Compressed air brake required from 3.5 t
 - Water capacity approx. 1000 l/m working width
- Optional**
- Chassis unbraked/braked
 - LED lighting set



Coupling cable attachment kit

Mowers / Mulchers

Silage technology

Designation	kg	Article no.
GREEN.ROLLER classic ¹ 2.50 m	2050	3015250
GREEN.ROLLER classic ¹ 2.70 m	2170	3015275
GREEN.ROLLER classic ¹ 3.00 m	2400	3015300
LED lighting set	8	3015700
Coupling cable kit	90	3015900
¹ using secondary raw materials		

Note: Delivered unassembled. Assembly time approx. 0.5 hours.

Buckets / Forks



Working width 2.70 m
3.00 m transport width, water
capacity: approx. 1000 l/m

GREEN.ROLLER classic chassis, unbraked

The unbraked chassis means the roller can be transported comfortably on public roads up to an axle load of 3000 kg and a speed of 25 km/h.

Standard equipment for the **GREEN.ROLLER** classic

- Tyres 11.5/80-15.3
- Axle unbraked
- Lighting with warning signs

GREEN.ROLLER classic chassis, braked

The roller can be braked via the compressed air brake system by swivelling the chassis over. The filled roller can be easily moved at speeds of up to 25 km/h in public road traffic. It is equipped with a compressed air brake system and a TÜV certificate for obtaining a general operating permit as standard.

Standard equipment for the **GREEN.ROLLER** classic

- Tyres 12.5/80-18
- Drum is braked by the chassis
- Axle braked
- TÜV certificate (not for 3.00 m)
- Lighting with warning signs

Designation	kg	Article no.
GREEN.ROLLER classic chassis ¹ 2.50 m, unbraked	2600	3016250
GREEN.ROLLER classic chassis ¹ 2.70 m, unbraked	2720	3016275
GREEN.ROLLER classic chassis ¹ 3.00 m, unbraked	2950	3016300
GREEN.ROLLER classic chassis ¹ 2.50 m, air-braked	2650	3017250
GREEN.ROLLER classic chassis ¹ 2.70 m, air-braked	2770	3017275
GREEN.ROLLER classic chassis ^{1,2,3} 3.00 m, air-braked	3000	3017300

¹ using secondary raw materials ² without TÜV certificate ³ 3.00 m = 3.21 m Transport width
Note: Delivered unassembled. Assembly time approx. 2.5 hours.



Drawbar

GREEN.ROLLER eco is supplied with a 3-point hitch as standard. Scraper, parking support and water filling nozzle come as standard. A tow bar is available as an option.

- Roller body diameter: 820 mm
- 3-point attachment CAT 2
- Powder-coated frame
- 9 mm rolling element wall thickness
- 2 x water filler necks,
Water capacity: 500 l/m

Designation	kg	Article no.
GREEN.ROLLER eco ¹ 1.50 m ²	486	3011150
GREEN.ROLLER eco ¹ 2.00 m ²	648	3011200
GREEN.ROLLER eco ¹ 2.50 m ²	810	3011250
Drawbar GREEN.ROLLER eco	60	3011050

¹ using secondary raw materials ² For transport widths, see www.duevelsdorf.de

LAWN ROLLER



Ideal for use in gardens and municipal areas. Simply pull by hand with a handle or hang on to the ride-on mower with the towing eye.

- Diameter: 65 cm
- Working width: 85 cm
- Empty weight: 90 kg
- Weight filled with water: approx. 400 kg
- Wall thickness: 6 mm
- Adjustable, spring-loaded scraper
- With handle and towing eye as standard
- Powder-coated frame
- 2 x water filler necks

Designation	kg	Article no.
Lawn roller	90	3012085

Because your farmland
deserves special technology.



You can find our machinery for comprehensive soil cultivation in our complete range of agricultural technology. Please feel free to contact us or your dealer.

düvelsdorf



The düvelsdorf front packer is the solution for a well-prepared seedbed and therefore the ideal preparation for successful sowing. When the front packer passes over the soil, it optimally reconsolidates the ground and breaks clods of soil into fine crumbs. The reconsolidation prevents the tractor from sinking into the ground as much and reduces ruts. The front packer's half-shell toothed rings are made of high-quality ductile iron and have a high tare weight. The bolted connections allow quick assembly without dismantling the entire roller. Scrapers are placed between the rings to prevent sticking. The optional preparation tools increase the usefulness of the machine and are recommended depending on your soil conditions.

- Robust, powder-coated frame
- Half-shell toothed rings made of ductile iron
- with front tools, tine attachment, levelling bar and knife roller available

You can find more information in our complete range of agricultural technology. Please ask your dealer.

Designation	kg	Article no.
Front packer 3.00 m	850	2710300
Front packer tine attachment 3.00 m	275	2711100
Front packer levelling board 3.00 m	300	2711300
Front packer knife roller 3.00 m	510	2711200
Front packer lighting set	10	2710310



The **TERRA.ROLLER** eco with Cambridge or toothed rings is suitable for versatile tasks in arable and grassland. With the CAT 1 and CAT 2 three-point hitch, it can be used both as a front packer as well as a three-point roller at the rear.

It is also possible to couple the roller with the **GREEN.RAKE** expert in order to use it for grassland reconsolidation directly behind the rake. A seeder can also be mounted.

Additional information regarding the **TERRA.ROLLER** eco can be found in our complete range of grassland maintenance technology and agricultural technology. Please ask your dealer.



TERRA.ROLLER ecowith seeder

Designation			kg	Article no.
TERRA.ROLLER eco	1.20 m Cambridge Ø 460 mm	NEW	375	2929505
TERRA.ROLLER eco	1.20 m Cambridge Ø 550 mm	NEW	465	2929510
TERRA.ROLLER eco	1.20 m toothed ring*	NEW	430	2929515
TERRA.ROLLER eco	1.60 m Cambridge Ø 460 mm	NEW	460	2929605
TERRA.ROLLER eco	1.60 m Cambridge Ø 550 mm	NEW	576	2929610
TERRA.ROLLER eco	1.60 m toothed ring*	NEW	565	2929615
TERRA.ROLLER eco	1.80 m Cambridge Ø 460 mm	NEW	515	2929705
TERRA.ROLLER eco	1.80 m Cambridge Ø 550 mm	NEW	650	2929710
TERRA.ROLLER eco	1.80 m toothed ring*	NEW	630	2929715
TERRA.ROLLER eco	2.00 m Cambridge Ø 460 mm	NEW	570	2929805
TERRA.ROLLER eco	2.00 m Cambridge Ø 550 mm	NEW	720	2929810
TERRA.ROLLER eco	2.00 m toothed ring*	NEW	700	2929815
TERRA.ROLLER eco	2.50 m Cambridge Ø 460 mm		642	2929030
TERRA.ROLLER eco	2.50 m Cambridge Ø 550 mm		913	2929230
TERRA.ROLLER eco	2.50 m toothed ring*		889	2929130
TERRA.ROLLER eco	3.00 m Cambridge Ø 460 mm		739	2930030
TERRA.ROLLER eco	3.00 m Cambridge Ø 550 mm		1065	2940230
TERRA.ROLLER eco	3.00 m toothed ring*		1029	2930130

* The toothed rings are made of ductile iron.



The düvelsdorf drum mower **d**CUT is designed for use on all meadows and fields. Whether as a secondary mower for large farms, or as a single mower for part-time or small farms – this mower is suitable for all farm sizes. The drive shaft must be removed when swivelling into the transport position.

Working width in m	1.35 MINI	1.35	1.65	1.85	2.10
Hydraulic lifting*	No	No	optional	optional	Yes
Number of drums	2	2	2	2	2
Drum diameter in m	0.63	0.63	0.78	0.88	1.0
Number of blades	4 (2x2)	4 (2x2)	6 (2x3)	6 (2x3)	8 (2x4)
Surface area output in ha/h	1.00	1.00	1.40	1.90	2.50
Power requirement in hp (approx.)	25	25	40	60	95
Attachment	CAT 1 + CAT 2	CAT 1 + CAT 2	CAT 1 + CAT 2	CAT 2	CAT 2 + CAT 3
Drive shaft with shear bolts	optional	optional	optional	optional	Yes
Integrated freewheeling	Yes	Yes	Yes	Yes	Yes

* Hydr. lift swings 85° upwards

Designation	kg	Article no.
Drum mower d CUT 1.35 m MINI**	280	2811100
Drum mower d CUT 1.35 m **	300	2811200
Drum mower d CUT 1.65 m	349	2811300
Drum mower d CUT 1.85 m	410	2811400
Drum mower d CUT 2.10 m	571	2811500
Hydraulic lifting d CUT 1.65 m	15	2820100
Hydraulic lifting d CUT 1.85 m	15	2820105
Drive shaft d CUT	8	2820110

** The lateral offset between the PTO shaft and the drum is 630 mm for the dCUT 1.35 MINI, and 880 mm for the dCUT 1.35.

Note: Delivered unassembled. Final assembly approx. 2 hours (side plates, swath protection)



A turnbuckle for two chains, drive shaft without freewheel (with shear bolts)



Blade carrier



Blade with shear bolts

The düvelsdorf swing arm mower with 2 m working width is ideal for mowing long grass on small and medium-sized fields and pastures.

It is possible to mount the hitch in several positions so that the mulcher can be driven laterally offset behind the tractor.

The mowing height can be adjusted at the skids.

- Seed shaft as standard
- CAT 2
- For tractor sizes from 40 - 50 hp
- Mowing speed: 5-6/h for changing crops!

Designation	kg	Article no.
Swing arm mower 2.00 m	400	2630200

Note: Delivered unassembled. Assembly time approx. 1 hour. Delivery does not include gear oil.



With its high weight and large drum, the silage roller offers very good compaction of the silage with good rolling characteristics. The drum's twelve fins are used for deep compaction. When working in silage walls, the four rolling elements on the frame prevent damage to the silage roller and walls. By using the optional edge wheel (which can be retrofitted to any silage roller), the side/edge of the silage can be additionally compacted (with DVB = pressure relief valve, oil pressure).

- CAT 2 / CAT 3
- Boom to horizontal: up to approx. 52° (adjustment range)
- Drum diameter: 1070 mm
- Water filling: 1000 l
- Towing eye: 15 t
- LED lighting
- Transport width: 3.00 m
- Max. total weight with 2 wheels: 3100 kg

Advantages of the silage roller

- High tare weight
- Individual ballasting with up to 1000 l water
- Deeply effective compaction when driving over silage
- Rolling element on frame for use in silage walls

Optional:

- Boom with/without wheel(s) (500/50 R 17)



Designation	kg	Article no.
Silage roller 3.00 m	1770	2911300
Boom silage roller without wheel	135	2911350
Boom silage roller with 1 wheel	220	2911360
Boom silage roller with 2 wheels	330	2911370



During the maize harvest, it is important for fodder to be levelled and compacted; this still has to be guaranteed even given the high efficiency rate of today's forage harvesters.

With a total width of 3 m, the maize leveller does not exceed the permissible transport width for public roads. The 3.7 m maize leveller is only intended for use within the farm due to its dimensions. The blade is suitable for 3-point attachment CAT 2 and CAT 3 in front or rear hydraulics.

The pulling point between the bottom links allows other implements to be towed without putting load on the top link. Viewing slots give a good view of the working area.

- Robust design
- Depth: 60 cm
- Height: 120 cm
- Side wall depth: 45 cm
- Wall thickness: 10 mm
- With towing eye
- Integrated skids



Designation	kg	Article no.
Maize leveller 3.00 m	630	2920300
Maize leveller 3.70 m	725	2920370
LED limiting lights	4	3712297



- Telescopic working width with continuous adjustment
- Compact design and short stem length ensure high manoeuvrability in small bunker silos and good driving characteristics on the road
- Safe road travel through cut-off valve
- Integrated towing eye
- Height: 1350 mm
- Blade depth: 500 mm
- Width: at least 2.60 m to max 4.40 m
- Hydraulic system: 1 x double-acting
- CAT 2 + CAT 3
- Hardox cutting
- Wall thickness: 10 mm

Optional:

- Side lighting

Transport width:

- 2.60 m, 4.00 m = 2592 m,
- 3.00 m - 4.40 m = 2990 m



Maize Leverller pushed out



Designation	kg	Article no.
Telescopic maize leveller 2.60 - 4.00 m	1685	2921400
Telescopic maize leveller 3.00 - 4.40 m	1800	2921440
LED limiting lights	4	3712297



- Bale diameter: 1000 – 1500 mm
- Max. bale weight: approx. 800 kg
- Hydraulic drive, 1 x single-acting control valve + unpressurised return flow approx. 30 l/min
- Film stretcher for 500 mm or 750 mm film
- Wrapping time: approx. 1.5 minutes
- External loading
- Tilt table for bale unloading by lifting the three-point hydraulic system
- Electronic wrapping counter¹
- Semi-automatic film cutting
- Power requirement from approx. 40 hp
- Length 2600 mm, height 1570 mm, transport width 1200 mm
- CAT 2 three-point attachment

¹ Only counts, manual stopping necessary!



Designation	kg	Article no.
Bale wrapper	440	2824100

MANURE FORK WITH PAWL ATTACHMENT



Manure fork for front loader with pawl attachment. Sturdy spring steel tines 800 mm long.

- Sturdy design
- Available in 3 sizes
- Also available in wider version (1.40 m)
- Spring steel tines (800 mm long)
- Pawl hook available for STOLL loaders

Designation	kg	Article no.
Manure fork size 2 pawl attachment 0.80 m, 5 tines	76	3519520
Manure fork size 3 pawl attachment 1.00 m, 6 tines	86	3519530
Manure fork size 3 pawl attachment 1.40 m, 8 tines	107	3519540
Tines for front loader 800 mm, each	4	3519800
Long pawl hook for STOLL loader (available for all sizes)	2	3519531

SOIL BUCKET WITH PAWL ATTACHMENT



Soil bucket for front loader¹ with pawl attachment

- Sturdy design
- Available in 3 sizes
- Pawl hook available for STOLL loaders

¹ not suitable for front loaders with steep angle.

Designation	kg	Article no.
Soil bucket size 2 pawl attachment 0.80 m, 0.2 m ³	90	3519002
Soil bucket size 3 pawl attachment 1.00 m, 0.25 m ³	102	3519003
Soil bucket size 2/3 pawl attachment 1.80 m, 0.4 m ³	193	3519008
Long pawl hook for STOLL loader (available for all sizes)	2	3519531



- Dimensions
 - Height inside: 530 mm, outside: 655 mm
 - Depth inside: 740 mm, outside: 805 mm
- Scrape rail
- Lateral reinforcing beads
- Forged hook

- At height 1.20 m: 1 x middle bar
- Up to size 1.40 m: 2 x middle bars

Designation	kg	Article no.
Light goods bucket 1.20 m EURO, 0.28 m³	112	3312120
Light goods bucket 1.40 m EURO, 0.34 m³	124	3312140
Light goods bucket 1.60 m EURO, 0.38 m³	144	3312160
Light goods bucket 1.80 m EURO, 0.43 m³	152	3312180
Light goods bucket 2.00 m EURO, 0.48 m³	163	3312200
Light goods bucket 2.20 m EURO, 0.53 m³	180	3312220

Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)



Individually welded attachments
to order - see p. 109

- Dimensions:
Height inside: 640 mm, outside: 735 mm
Depth inside: 890 mm, outside: 980 mm
- Conical construction
- Forged hook
- Scrape rail
- Lateral reinforcing beads
- Thickness: 5 mm

Designation	kg	Article no.
Soil bucket 1.20 m EURO, 0.4 m³	183	3315120
Soil bucket 1.40 m EURO, 0.5 m³	200	3315140
Soil bucket 1.60 m EURO, 0.6 m³	213	3315160
Soil bucket 1.80 m EURO, 0.7 m³	230	3315180
Soil bucket 2.00 m EURO, 0.8 m³	247	3315200
Soil bucket 2.20 m EURO, 0.9 m³	282	3315220
Soil bucket 2.40 m EURO, 1.0 m³, with two bars	312	3315240
Soil bucket 2.60 m EURO, 1.1 m³, with two bars	326	3315260
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		

BULK MATERIAL BUCKET EURO



- Robust construction
- EURO attachment
- Dimensions:
 - Height inside: 820 mm, outside: 935 mm
 - Depth inside: 1150 mm, outside: 1212 mm
- Scrape rail
- Thickness: 5 mm

Individually welded attachments to order - see 109

Designation	kg	Article no.
Bulk material bucket 2.00 m EURO, 1.60 m³	404	3520200
Bulk material bucket 2.30 m EURO, 1.85 m³	433	3520230
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		

MANURE FORK EURO



Continuous cone sleeves



Cone sleeves welded into the frame

Sturdy manure fork for front loader with EURO attachment and robust spring steel tines, each 800 mm long.

- EURO attachment
- Available with 8, 10 or 12 tines
- Wearing rail

Designation	kg	Article no.
Manure fork EURO 1.37 m, 8 tines	130	3519037
Manure fork EURO 1.73 m, 10 tines	152	3519073
Manure fork EURO 2.10 m, 12 tines with middle bar	178	3519121
Manure fork EURO 2.47 m, 14 tines with middle bar	183	3519140
Tines for front loader 800 mm, each	4	3519800



Convenient manure and silage fork with thumb with tines. With two double-acting hydraulic cylinders, the tongs grip powerfully. This ensures that the goods to be transported remain safely on the fork. All tines are replaceable.

- EURO attachment
- Robust steel construction
- Wearing rail
- Tine length: 800 mm
- Tines with anti-twist feature

Note: A pressure relief valve is required for hydraulic pressure above 180 bar.



Designation	kg	Article no.
Manure and silage fork 1.20 m EURO, 2 x 6 tines	215	3519544
Manure and silage fork 1.40 m EURO, 2 x 7 tines	235	3519545
Manure and silage fork 1.60 m EURO, 2 x 8 tines	255	3519546
Manure and silage fork 1.80 m EURO, 2 x 9 tines	275	3519560
Manure and silage fork 2.00 m EURO, 2 x 10 tines	300	3519580
Manure and silage fork 2.20 m EURO, 2 x 11 tines	330	3519582
Manure and silage fork 2.40 m EURO, 2 x 12 tines	355	3519584
Pressure relief valve	1	3517960

Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

Note: Delivered unassembled. Assembly time: approx. 1.5 hours.



Individually welded attachments
to order - see p. 109

The manure bucket is designed to remove and load manure. It is suitable for front loaders with EURO attachment. The removable side pockets, which make it easier to remove the manure, are a particular highlight.

- EURO attachment
 - Bucket: 1.80 m and 2.00 m
 - Removable side pockets
 - Number of tines: 8 or 9 tines
 - Scrape rail
 - 2 hydraulic cylinders
 - 1 double-acting connection required
 - Large opening width: 1.45 m
 - Removal from the wall is possible with the gripper fully open
- Dimensions:

 - Bucket height: 600 mm
 - Bucket depth: 850 mm
 - Height of device cpl. closed: 900 mm



Designation	kg	Article no.
Manure bucket 1.80 m EURO, 0.7 m³, 8 tines	376	3525180
Manure bucket 2.00 m EURO, 0.8 m³, 9 tines	414	3525200
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		



Individually welded attachments
to order - see p. 109

- 2 hydraulic cylinders
- Robust bucket substructure
- Large opening width: 1.50 m
- Removable side pockets
- Removal from the wall is possible with the gripper fully open
- EURO attachment
- Scrape rail (16 mm)
- Sturdy gripping tines

Dimensions:

- Bucket height: 630 mm
- Bucket depth: 860 mm
- Device height compl. closed: 930 mm



Please note

1.60 m power grab bucket attachment is only possible with central locking lever.
A pressure relief valve is required for hydraulic pressure above 180 bar.

Designation	kg	Article no.
Power grab bucket 1.60 m EURO, 0.75 m³	450	3522160
Power grab bucket 1.80 m EURO, 0.85 m³	470	3522180
Power grab bucket 2.00 m EURO, 0.95 m³	500	3522200
Power grab bucket 2.20 m EURO, 1.05 m³	525	3522220
Pressure relief valve	1	3517960
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		

POWER GRAB BUCKET COMPACT



➤ EURO attachment
1 DW connection
max. 180 bar

Designation	kg	Article no.
Power grab bucket compact 1.20 m, 6 tines, 0.25 m³	115	3529120
Power grab bucket compact 1.40 m, 7 tines, 0.30 m³	126	3529140
Power grab bucket compact 1.60 m, 8 tines, 0.34 m³	154	3529160
Power grab bucket compact 1.80 m, 9 tines, 0.38 m³	165	3529180

LIGHT GOODS BUCKET COMPACT



➤ EURO attachment

Designation	kg	Article no.
Light goods bucket compact 1.20 m, 0.12 m³	69	3311120
Light goods bucket compact 1,40 m, 0.14 m³	77	3311140
Light goods bucket compact 1,60 m, 0.16 m³	86	3311160
Light goods bucket compact 1,80 m, 0.18 m³	94	3311180



- Robust construction
- Weidemann and Schäffer attachments
- Width 1.00 - 1.20 m
- Versatile use
- Scrape rail

- Dimensions:
- Height inside 630 mm, outside 737 mm
 - Depth inside 900 mm, outside 980 mm

Designation	kg	Article no.
Soil bucket 1.00 m Weidemann 36 mm (660 mm) 0.3 m³	172	3210020
Soil bucket 1.20 m Weidemann 36 mm (660 mm) 0.4 m³	205	3210120
Soil bucket 1.00 m Weidemann plate attachment 0.3 m³	163	3210025
Soil bucket 1.20 m Weidemann plate attachment 0.4 m³	196	3210125
Soil bucket 1.00 m Schäffer 42 mm (660 mm) 0.3 m³	175	3210040
Soil bucket 1.20 m Schäffer 42 mm (660 mm) 0.4 m³	208	3210140
Soil bucket 1.00 m Schäffer 34 mm (650 mm) 0.3 m³	168	3210045
Soil bucket 1.20 m Schäffer 34 mm (650 mm) 0.4 m³	201	3210145
Soil bucket 1.00 m Schäffer plate attachment 0.3 m³	169	3210060
Soil bucket 1.20 m Schäffer plate attachment 0.4 m³	202	3210160

* Attention: Lower locking strap is enclosed loose!



- Weidemann and Schäffer attachments
- Width 1.00 - 1.20 m
- Scrape rail

Dimensions:

- Height inside: 530 mm, outside: 650 mm
- Depth inside: 740 mm, outside: 805 mm

Designation	kg	Article no.
Light goods bucket 1.00 m Weidemann 36 mm (660 mm) 0.23 m³	115	3211020
Light goods bucket 1.20 m Weidemann 36 mm (660 mm) 0.28 m³	125	3211120
Light goods bucket 1.00 m Weidemann plate attachment 0.23 m³	110	3211025
Light goods bucket 1.20 m Weidemann plate attachment 0.28 m³	123	3211125
Light goods bucket 1.00 m Schäffer 42 mm (660 mm) 0.23 m³	116	3211040
Light goods bucket 1.20 m Schäffer 42 mm (660 mm) 0.28 m³	130	3211140
Light goods bucket 1.00 m Schäffer 34 mm (650 mm) 0.23 m³	110	3211045
Light goods bucket 1.20 m Schäffer 34 mm (650 mm) 0.28 m³	120	3211145
Light goods bucket 1.00 m Schäffer plate attachment 0.23 m³	125	3211060
Light goods bucket 1.20 m Schäffer plate attachment 0.28 m³	137	3211160





- Weidemann and Schäffer attachments
 - Width 1.00 - 1.20 m
 - 1 hydraulic cylinder
 - 1 double-acting connection required
- Dimensions:

 - Height: 600 mm
 - Opening width: 1000 mm
 - Available with 6 tines & 8 tines

Note: A pressure relief valve is required for hydraulic pressure above 180 bar.

Designation	kg	Article no.
Fork-and-grab 1.00 m Weidemann 36 mm (660 mm)	146	3230020
Fork-and-grab 1.20 m Weidemann 36 mm (660 mm)	166	3230120
Fork-and-grab 1.00 m Weidemann plate attachment	137	3230025
Fork-and-grab 1.20 m Weidemann plate attachment	157	3230125
Fork-and-grab 1.00 m Schäffer 42 mm (660 mm)	149	3230040
Fork-and-grab 1.20 m Schäffer 42 mm (660 mm)	169	3230140
Fork-and-grab 1.00 m Schäffer 34 mm (650 mm)	142	3230045
Fork-and-grab 1.20 m Schäffer 34 mm (650 mm)	162	3230145
Fork-and-grab 1.00 m Schäffer plate attachment	143	3230060
Fork-and-grab 1.20 m Schäffer plate attachment	163	3230160
Fork-and-grab 1.20 m EURO	167	3230150
Pressure relief valve	1	3517960

Individually welded attachments on request (e.g. Volvo, Bobcat,...)



Emptying position

The tipping bucket can be easily picked up with the forklift tines and is secured with a chain. It can be used for loading potatoes, onions, cereals and other bulk materials. The sturdy bucket is made of 6 mm sheet metal. It has a double-jointed frame. This frame allows the bucket to tilt backward (for transport) by 24 degrees and forward (for emptying) by 35 degrees.

Type	Volume	Weight	A	B	C	D	E
140	800 l	295 kg	148 cm	140 cm	100 cm	130 cm	85 cm
160	950 l	340 kg	168 cm	140 cm	100 cm	130 cm	85 cm
180	1100 l	385 kg	188 cm	140 cm	100 cm	130 cm	85 cm
210	1300 l	440 kg	218 cm	140 cm	100 cm	130 cm	85 cm

Designation	kg	Article no.
Tipping bucket 1.40 m	295	3519400
Tipping bucket 1.60 m	340	3519500
Tipping bucket 1.80 m	385	3519600
Tipping bucket 2.10 m	440	3519700



Individually welded attachments to order
see p. 109

- Arms move freely to the sides for working without causing any damage
- Bales put down horizontally or upright
- For bales from 800 mm to 1600 mm
- Opening depth 1000 mm, height 800 mm
- Supplied with hydraulic hoses
- Suitable for bales up to 900 kg

Note: A pressure relief valve is required for hydraulic pressure above 180 bar.

Designation	kg	Article no.
Round bale gripper EURO	195	3517800
Round bale gripper Weidemann 36 mm (660 mm)	220	3517850
Round bale gripper pressure relief valve	1	3517950
Individually welded attachments on request (e.g. Schäffer, Volvo, Bobcat,...)		



Individually welded attachments to order
see p. 109

- Universal bale gripper for round and square bales
- EURO attachment
- Bale weight: max. 1400 kg
- Round bale diameter: 900 - 1600 mm
- Square bale width: 800 - 1500 mm
- Opening width: 1980 mm



Note: A pressure relief valve is required for hydraulic pressure above 180 bar.

Designation	kg	Article no.
Universal bale gripper	295	3517890
Round bale gripper pressure relief valve	1	3517960
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		

ROUND BALE FORK SOLO MECHANICAL



The round bale fork solo can be used universally with the EURO and CAT 2 attachment. The freely movable arms can be used to pick up round bales ¹ with a diameter of 0.8 m to 1.8 m without having to adjust the arms. The round bale fork can be optionally equipped with a cylinder with which the arms can be set hydraulically to the bale size. ¹For bale sizes (wrapped and film bales) >1.3 m, there is a risk of damage to the film.

- EURO / CAT 2

➤ Bale size: 0.80 - 1.80 m

➤ Load capacity: approx. 700 kg
- Advantages

➤ Use in front loader possible even without third control circuit

➤ Picks up bales quickly and easily

➤ No need to adjust the arms

Designation	kg	Article no.
Round bale fork solo	110	3517740

ROUND BALE FORK SOLO HYDRAULIC



Designation	kg	Article no.
Round bale fork solo hydraulic	120	3517745



The Combi round bale fork can be used by different carrier vehicles due to its EURO and 3-point hitch.

- Load capacity approx. 600 kg
- 3-point attachment CAT 2 and EURO

Designation	kg	Article no.
Round bale fork Combi	100	3517785

ROUND BALE FORK, 3-POINT



- For 3-point attachment
- Sturdy tubular steel frame
- Angled tips for an easy bale pick-up
- Load capacity approx. 600 kg
- 3-point attachment CAT 1 and CAT 2
- Bale size 0.80 - 1.30 m

Designation	kg	Article no.
Round bale fork 3-point	74	3517780

ROUND BALE FORK DUO



The round bale fork DUO is ideal for efficiently transporting 2 round bales. Versatile use with EURO and 3-point is made possible by the combination attachment.



- Load capacity 2 x 700 kg
- 3-point attachment CAT 2, EURO
- Opening width each side from 650 to 1000 mm

Dimensions:

- Length: 1250 mm
- Width: 2100 mm

Designation	kg	Article no.
Round bale fork DUO	165	3517750

BALE CUTTING FORK



- Individually bolted blades
- Two hydraulic cylinders, max. working pressure 200 bar
- 7 heavy-duty tines 800 mm

Dimensions:

- Width: 1.80 m
- Bale size: max. 1.60 m
- Bale weight: max. 1400 kg

Note:

Pressure relief valve required from 200 bar

Designation	kg	Article no.
Bale cutting fork	585	3527200
Pressure relief valve	1	3517960
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		

BALE CUTTING BUCKET



The bale cutting fork with bucket is suitable for cutting silage bales up to 1.6 m in diameter. The tempered and serrated blades cut the bale cleanly and easily. The device can also be used as a bucket for removing maize silage. Opening the cutting frame allows bulk material to be completely removed from the wall.



- Individually bolted blades
- Two hydraulic cylinders, max. working pressure 200 bar

Dimensions:

- Volume: 930 l
- Width: 1.80 m
- Bale size: max. 1.60 m
- Bale weight: max. 1400 kg

Note:

Pressure relief valve required from 200 bar

Designation	kg	Article no.
Bale cutting bucket	660	3527100
Pressure relief valve	1	3517960
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		



- With 2 or 4 tines to pick up bales quickly and securely
- Tines 1100 mm
- Height 0.6 m
- Bale transport fork 1.20 m load capacity: 500 kg
- Bale transport fork 1.90 m load capacity: 1000 kg

Designation	kg	Article no.
Bale transport fork 1.20 m EURO, 2 tines (3rd tine optional)	62	3517625
Bar bale transport fork 1.20 m	12	3517644
Bale transport fork 1.90 m EURO, 4 tines	120	3517650
Bar bale transport fork 1.90 m	19	3517645
Spare tines 1100 mm, each	6	3519801



Bale transport fork, hinged, 3-point

- Hinged tines
- For 3-point attachment and triangle hitch
- Sturdy frame in U-profile
- With 2 tines to pick up bales quickly and easily
- Load capacity 500 kg
- 3-point attachment CAT 2
- Tines 1100 mm

Bale / Load transport

Designation	kg	Article no.
Bale transport fork 3-point hinged	43	3517620



Bale transport fork 3-point

- For 3-point attachment and triangle hitch
- Sturdy frame in U-profile
- With 2 tines to pick up bales quickly and easily
- Load capacity 500 kg
- 3-point attachment CAT 2
- Tines 1100 mm

Adapters / Tractor triangle hitches

Designation	kg	Article no.
Bale transport fork 3-point	37	3517610

Snow blades / ploughs

Rubber blades



Both the tines and the bar can be folded in quickly and easily using two hydraulic cylinders. This achieves a compact transport position and ensures safe road travel.

- Folding of the tines and bar possible (compact transport position)
- Transport of up to 4 bales
- Load capacity: 1500 kg
- 3 x heavy duty tines 1100 mm, 45 mm diameter
- Hydraulic system: 1 x DW (30 l / min flow rate)
- Height opened out: 2295 mm, folded up: 1430 mm
- Length opened out: 1280 mm, folded up: 400 mm
- Width: 1850 mm

Optional

- 2 x tines 1100 mm

Individually welded attachments to order
see p. 109



Designation	kg	Article no.
Hydraulic bale transport fork EURO	310	3517760
Individually welded attachments on request (e.g. Schäffer, Volvo, Bobcat,...)		



Individually welded attachments to order
see p. 109

1100 mm tine length
Individually adjustable tines

A practical aid for transporting pallets. The 1.10 m long forged fork tines can be individually adjusted.

- For front loaders with EURO attachment
- 2 forged industrial tines
- Tine length 1100 mm
- Individually adjustable fork tines
- Standard fork support FEM II (size: 40.7 cm), **ISO**
- Tine cross-section 100 x 40 mm
- Pallet fork load capacity 2000 kg
- Load capacity per tine holder 250 kg
- Sturdy support frame
- Improved clear view

Optional

- Tine holder for pallet fork
- Thumb for pallet fork (see p. 58)
- Bale support for fork support FEM II, **ISO**
- Push-on tubes for tine profile 100 x 40



Optional accessories

Designation	kg	Article no.
Pallet fork EURO, FEM II, ISO	218	3516110
Pallet fork support unit FEM II, ISO	125	3515050
Pallet fork tines 1.10 m FEM II, ISO , each	46	3515100
Thumb for pallet fork, FEM II, ISO	68	3516200
Tine holder pallet fork, FEM II, each (without tines)	12	3516150
Bale carrier (set) FEM II, ISO	47	3516160
Push-on tubes (2 pcs)	32	3516170
Tines for front loader 1100 mm, each	6	3519801
Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)		

THUMB FOR PALLET FORK



The pallet thumb is used as an accessory for the pallet fork with FEM II ISO or DIN attachment and is used for loading logs. It is also possible to handle light wood and shrub wood as well as to clamp various objects on the fork tines.

- Weight: 68 kg
- Tension values: 300 - 1300 mm
- 1 x double-acting connection required
- Approx. 2000 kg closing force
- 180 bar / 60 l oil



Designation	kg	Article no.
Thumb for pallet fork FEM II, ISO	68	3516200
Thumb for pallet fork FEM II, DIN	68	3516210

CRATE ROTATING DEVICE



- Suitable for forklifts and vehicles with FEM II or FEM III, ISO standard
- Adjustable fork tines
- Fork support unit width: 1000 mm
- Rotary movement by double-acting hydraulic cylinder
- Turning range: 180° (counterclockwise)
- Load capacity: 2000 kg

Scope of supply:

Hydraulic hoses with quick-action couplings and a removable, hinged additional tine. (Forklift tines not included.)

Accessories:

Forklift tines, pallet fork support unit (width 100 cm)



To use the crate rotating device in the EURO attachment, the FEM II can be combined with the pallet fork support unit.

Designation	kg	Article no.
Crate rotating device FEM II	306	3524200
Crate rotating device FEM III	320	3524300
Pallet fork tines 1.10 m FEM II, ISO , each	46	3515100
Pallet fork support unit FEM II, ISO	125	3515050

BIG BAG HOLDER EURO



The telescopic Big Bag holder has various adjustment options, making it suitable for nearly all Big Bags.

- EURO attachment
- Hook height 1300 - 1450 mm
- Width of the Big Bag attachment to the frame from 1150 - 1400 mm
- Weight: 111 kg
- Load capacity: 1200 kg
- Hook depth: 700 – 1000 mm



Designation	kg	Article no.
Big Bag holder EURO	111	3519250

3-POINT ATTACHMENT WITH TRAILER-HITCH BALL



This device is suitable for transport and manoeuvring of e.g. caravans, boat trailers or car trailers on private property.

- 3-point attachment
- Bolt diameter upper linkage: 19 mm (CAT 1)
- Bolt diameter lower linkage: 22 mm (CAT 1)
- Internal dimension lower linkage: 820 mm (CAT 2)
- Car trailer hitch K50 (CAT 2)
- Coupling load: 150 kg
- Towed weight: max. 3500 kg



Attention

Not licensed for use in areas covered by the Road Traffic Act / Road Traffic Licensing Regulations!

Designation	kg	Article no.
Three-point with trailer-hitch ball	24	3519220

TRACTOR AND DEVICE TRIANGLE HITCH



Tractor triangle hitch CAT 2

The tractor triangle hitch has a trailer-hitch ball with two external rollers for safe gripping and low-wear rolling coupling. It is suitable for devices up to 1400 kg (mounted machine centre of gravity max. 1.50 m).



Triangle hitch

Triangle hitch for devices up to 1500 kg

Designation	kg	Article no.
Tractor triangle hitch CAT 2	35	3519900
Triangle hitch	15	3519910

ATTACHMENTS



Power grab bucket attachment

Suitable for

- Standard sweeper
- Wedge-shaped rubber blade



EURO adapter for forklift attachment

Suitable for

- Standard sweeper
- Wedge-shaped rubber blade

Designation	kg	Article no.
Power grab bucket attachment sweeper	31	4510480
EURO adapter - forklift attachment	63	4510450

ADAPTER

3-POINT ADAPTER



 **NEW** 

FRONT LOADER ADAPTER



If you also want to attach devices for the 3-point attachment to the front loader with EURO attachment, then use this front loader attachment. Load capacity approx. 1000 kg
Upper link connection may be required

Designation	kg	Article no.
Adapter 3-point CAT 2 - EURO	65	3519100
Adapter EURO - Three-point CAT 2	70	3519200
Upper link connection adapter EURO - three-point CAT 2	2	3519205

2.5 t ADAPTER



Individually welded attachments to order
see p. 109

Only suitable for EURO devices

Designation	kg	Article no.
Adapter 2.5 t without attachment	79	3519300
Adapter 2.5 t Weidemann 36 mm (660 mm)	94	3519301
Adapter 2.5 t Schäffer 34 mm (650 mm)	89	3519302
Adapter 2.5 t Schäffer 42 mm (660 mm)	97	3519303
Adapter 2.5 t Schäffer 42 mm (860 mm)	97	3519304

Individually welded attachments on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

ADAPTER
WEIDEMANN TO EURO



SCHÄFFER TO EURO



ADAPTER PLATE WITHOUT HOOK AND EYE



All devices with EURO attachment can be driven with these adapters. Load capacity 1000 kg
The exact dimensions of our adapter plates can be found on our website at www.duevelsdorf.de

Designation	kg	Article no.
Adapter Weidemann 36 mm (660 mm)	76	3519110
Adapter without attachment	68	3519112
Adapter Schäffer 42 mm (660 mm)	76	3519105
Adapter Schäffer 34 mm (650 mm)	76	3519106
Adapter Schäffer 42 mm (860 mm)	76	3519107

PHOTOGRAPHS FROM PRODUCTION



Grassland maintenance

Rollers

Mowers / Mulchers



Silage technology

Buckets / Forks



Illustration shows optional extra equipment

The new düvelsdorf snow blades with a working width of up to 2.20 m are ideal for clearing paths and roads.

The machines are suitable both in municipal operations and in the field of agriculture and construction.

Designation	kg	Article no.
Municipal snow blade 1.50 m	145	3721150
Municipal snow blade 1.80 m	160	3721180
Municipal snow blade 2.00 m	170	3721200
Municipal snow blade 2.20 m	180	3721220
Hydraulic tilting municipal snow blade	15	3721400
LED limiting lights	4	3712297
Wheel set for municipal snow plough (from 1.80 m)	12	3720400
Skids for municipal snow plough (from 1.80 m)	12	3720410
Municipal triangle attachment snow plough/blade municipal	20	3720420



Illustration shows optional extra equipment

Designation	kg	Article no.
Forklift snow blade 1.50 m	140	3722150
Forklift snow blade 1.80 m	150	3722180
Forklift snow blade 2.00 m	160	3722200
Forklift snow blade 2.20 m	170	3722220
Hydraulic tilting municipal snow blade	15	3721400
LED limiting lights	4	3712297
Wheel set for municipal snow plough (from 1.80 m)	12	3720400
Skids for municipal snow plough (from 1.80 m)	12	3720410



The snow blade with a working width of 2.00 m to 2.90 m is suitable for clearing paths and roads. The rubber scraper prevents damage to the road surface. The Comfort snow blade is equipped with a combination attachment for 3-point and EURO as a standard feature.

- Blade height: 80 cm
- Rubber scraper: 50 mm thick (can also be replaced in parts)
- Standard 3-point attachment CAT 2 and EURO attachment
- Swivels approx. 30° sideways
- Holders for standard support wheels/skids (except DSK 2.00 m snow blade)

Optional

- Hydraulic tilting with 2 cylinders
- LED limiting lights (7-pin intermediate cable not included in delivery)
- Support wheels/skids



Skid



50 mm rubber scraper and support wheel

Designation	kg	Article no.
Snow blade 2.00 m	274	3712120
Snow blade 2.20 m	296	3712210
Snow blade 2.50 m	321	3712240
Snow blade 2.90 m	351	3712280
Hydraulic tilting snow blade	22	3712296
LED limiting lights	4	3712297
Wheel set snow blade/snow plough	15	3712299
Skids set snow blade/snow plough	12	3712298

COMFORT SNOW BLADE WITH COLLISION
PROTECTION



Hydraulic tilting (optional)



Combination attachment



Spring-loaded rubber scraper

- Rubber scraper with collision protection
- Combi-attachment 3-point attachment CAT 2 and EURO
- Holders for standard support wheels/skids (except snow blade AFS 2 m)
- Minimum clearing width 20 cm smaller than blade width (by swivelling the snow blade)
- Swivels approx. 30° sideways
- Blade height 80 cm

Optional

- Hydraulic tilting with 2 cylinders
- Support wheels/skids
- LED lighting kit (7-pin intermediate cable not included in delivery)


Designation	kg	Article no.
Snow blade DSK 2.00 m	325	3713190
Snow blade DSK 2.20 m	350	3713220
Snow blade DSK 2.50 m	382	3713250
Snow blade DSK 2.90 m	415	3713290
Hydraulic tilting snow blade	22	3712296
LED limiting lights	4	3712297
Wheel set snow blade/snow plough	15	3712299
Skids set snow blade/snow plough	12	3712298



- Combination attachment CAT 0 and CAT 1
- Spring-loaded rubber scraper (collision protection)
- Hydraulic adjustment with electric change-over switch
- LED lighting
- Pendulum adjustment
- Blade height 60 cm
- Hydraulic swivel: up to 30°.

Optional

- Wheel set
- Skids
- Municipal triangle



Designation	kg	Article no.
Municipal snow plough 1.50 m	145	3720150
Municipal snow plough 1.80 m	160	3720180
Municipal snow plough 2.00 m	175	3720200
Municipal snow plough 2.20 m	190	3720220
Wheel set for municipal snow plough	12	3720400
Skids for municipal snow plough	20	3720410
Municipal triangle attachment snow plough/blade municipal	20	3720420



The düvelsdorf snow plough consists of two centrally mounted swing wings, which are individually hydraulically adjustable. Due to the flexible adjustment options of left, right, straight and as a plough, the snow blade is ideal for use in various areas such as streets, squares and farmyards.

- Hydraulic adjustment
- Pendulum adjustment with springs for centring
- Combi-attachment 3-point attachment CAT 2 and EURO
- Double-acting control circuit with solenoid valve and change-over switch for the cab
- Rubber scraper with collision protection
- Holders for support wheels or skids (except snow plough 2.00 m)
- LED lighting set (7-pin intermediate cable not included in delivery)
- Minimum clearing width 30 cm smaller than blade width (by swivelling the snow blade)
- Blade height 80 cm



Pendulum adjustment



Hydraulic tilting



Combination attachment

Designation	kg	Article no.
Snow plough 2.00 m	361	3714190
Snow plough 2.20 m	383	3714220
Snow plough 2.60 m	425	3714260
Snow plough 2.90 m	441	3714290
Wheel set snow blade/snow plough	15	3712299
Skids set snow blade/snow plough	12	3712298



Rubber blade EURO

The rubber blade is ideal for cleaning roads, squares, courtyards and feeding alleys. In winter it can also be used to clear snow. The rubber edge adapts well to the ground and adjusts to uneven surfaces.

- Stable construction
- Hot-dip galvanised design
- Low-wear rubber scraper with steel inlay



Rubber scraper with textile inlay



Rubber scraper with steel inlay

Designation	kg	Article no.
Rubber blade 1.50 m EURO steel inlay	64	3616150
Rubber blade 2.00 m EURO steel inlay	78	3616200
Rubber blade 2.60 m EURO steel inlay	93	3616260
Rubber blade 1.50 m EURO textile inlay	69	3616155
Rubber blade 2.00 m EURO textile inlay	81	3616205
Rubber blade 2.60 m EURO textile inlay	86	3616265
Rubber scraper as spare part		
Rubber scraper 1.50 m steel inlay	28	3615320
Rubber scraper 2.00 m steel inlay	40	3615310
Rubber scraper 2.60 m steel inlay	57	3615300
Rubber scraper 1.50 m textile inlay	33	3615370
Rubber scraper 2.00 m textile inlay	45	3615360
Rubber scraper 2.60 m textile inlay	56	3615350
Exchange of the rubber scraper from steel inlay to textile inlay		on request



D-LOCK
Bolted attachments
see page 110 / 111



Designation	kg	Article no.
Rubber blade 1.50 m D-LOCK s steel inlay	76	3616450
Rubber blade 2.00 m D-LOCK steel inlay	79	3616500
Rubber blade 2.60 m D-LOCK steel inlay	111	3616560
Rubber blade 2.60 m D-LOCK textile inlay	104	3616565

RUBBER BLADE POWER GRAB
BUCKET ATTACHMENT



Designation	kg	Article no.
Rubber blade 2.60 m power grab bucket attachment	185	3617490



3 point/forklift



3-point attachment CAT 2 and forklift,
pockets for forklift: approx. 16 x 6 cm



EURO/forklift

Designation	kg	Article no.
Rubber blade ¹ 1.50 m Weidemann 36 mm (660 mm)	99	3615150
Rubber blade ¹ 2.00 m Weidemann 36 mm (660 mm)	122	3615200
Rubber blade ¹ 2.60 m Weidemann 36 mm (660 mm)	144	3615210
Rubber blade ¹ 2.60 m 3-point/forklift	180	3615250
Rubber blade ¹ 2.60 m EURO/forklift	190	3617460

¹ using secondary raw materials / rubber strip with steel inlay

RUBBER BLADE 3.60 M KOMBI



The rubber blade 3.60 m Kombi with EURO, forklift and three-point attachment CAT 2 is suitable for clearing paved surfaces.

The rubber blade can be mechanically adjusted in three stages from 3.00 m - 3.60 m using the lateral elements, with the lateral elements having an angle of 55° - 20°.

The rubber scraper with a steel core is made up of three elements that overlap.

Designation	kg	Article no.
Rubber blade 3.60 m KOMBI	215	3617650

RUBBER BLADE 3.60 M D-LOCK



with bolted Schäffer attachment

D-LOCK
Bolted attachments
see page 110 / 111

Designation	kg	Article no.
Rubber blade 3.60 m D-LOCK	180	3617660

RUBBER BLADE 3.00 M, PENDULUM-MOUNTED



NEW



- Working width: 3.00 m
- Pendulum range: $\pm 5^\circ$
- Blade height: 660 mm
- Blade depth: 650 mm
- Attachment: EURO and CAT 2
- 45° cranked ends for collecting function
- band roll wheel on both sides can be mounted at three positions (1 wheel included in the scope of supply)

The pendulum-mounted rubber blade is suitable for clearing silo slabs, boulders and other surfaces. The pendulum joint ensures that it rests evenly on the subsoil, thus guaranteeing an optimal result. The wings, which protrude far forward, and the raised sheet metal ensure a high pushing volume.

Designation	kg	Article no.
Rubber blade ¹ 3.00 m pendulum-mounted	290	3617600
¹ using secondary raw materials / rubber strip with steel inlay		

RUBBER BLADE 2.60 M COMBI



NEW



The rubber blade Combi has a 3-way attachment. The combination of EURO, 3-point and forklift attachment is an ideal prerequisite for fast and efficient use with various carrier vehicles.

The standard hydraulic side adjustment ensures good drainage and the rubber blade can be swivelled up to 30° to the right and left. The ends can be swivelled mechanically by approx. 45° .

Designation	kg	Article no.
Rubber blade ¹ 2.60 m COMBI	220	3617450
¹ using secondary raw materials / rubber strip with steel inlay		

RUBBER BLADE WEIDEMANN/EURO



1.30 m, mechanical adjustable for Weidemann (hydraulic lock) or EURO. Hydraulic adjustment is available as an option.

- Hot-dip galvanised frame
- Minimum clearing width = 110 cm
- Max. tilt angle = 30°
- 3-way adjustable

Designation	kg	Article no.
Rubber blade ¹ mechanical 1.30 m Weidemann 36 mm (660 mm)	120	3614150
Rubber blade ¹ mechanical 1.30 m EURO	120	3617420
Hydraulic adjustment	14	3618050

¹ using secondary raw materials / rubber strip with steel inlay

RUBBER BLADES EURO MECHANICAL



2.60 m for EURO attachment with mechanical tilting Ideal for cleaning feeding areas and putting out fodder. Hydraulic adjustment is available as an option.

- Hot-dip galvanised frame
- Min. clearing width = 210 cm
- Max. tilt angle = 30°
- 3-way adjustable

Designation	kg	Article no.
Rubber blade ¹ mechanical 2.60 m EURO	180	3617400
Hydraulic adjustment	14	3618050

¹ using secondary raw materials / rubber strip with steel inlay

RUBBER BLADE 70° SWIVELLING



- 2 x double-acting cylinder
- Max. tilt angle = 70°
- Ends can be inclined by 45°
- Combi attachment Euro, 3-point and forklift
- Hot-dip galvanised frame



Designation	kg	Article no.
Rubber blade 2.60 m 70° with steel inlay	275	3617550
Rubber blade 2.60 m 70° with textile inlay	268	3617560

¹ using secondary raw materials / rubber strip with steel inlay

WEDGE-SHAPED RUBBER BLADE



1,5 m working width

The wedge-shaped rubber blade is ideal for cleaning feeding areas and putting out fodder due to its acute angle.

- Hot-dip galvanised frame
- 1.50 m working width = 70° angle
- 2.50 m working width = 60° angle

Optional

- EURO adapter for forklift attachment
- Power grab bucket attachment for forklift see p.58

Designation	kg	Article no.
Wedge rubber blade ¹ 1.50 m	145	17470
Wedge rubber blade ¹ 2.50 m	275	17480

¹ using secondary raw materials



The machine swivels mechanically to the left or right. It can be attached to the 3-point attachment, to the coupling triangle or front loader (for pawl attachments), with the combined attachment for EURO, 3-point and coupling triangle – and also to the power grab bucket attachment.

The rotating wheel drive unit is executed above the ground. Hydraulic adjustment can be retrofitted at any time on request.

Technical data:

- Clearing width: approx. 150 cm
- Driven over the ground
- Adjustment to the left and right
- A 16.9/34 tyre is recommended.
(not included in delivery)
- Galvanised

Optional

- Hydraulic swivelling and adjustment for fodder clearing machine 3-point + combination



Power grab bucket attachment

Designation	kg	Article no.
Fodder clearing machine 3-point mechanical	275	18100
Fodder clearing machine combination mechanical	315	18150
Hydraulic adjustment	14	18050
Fodder clearing machine for power grab bucket attachment	200	18200



The düvelsdorf box scraper is suitable for loosening and distributing bedding in stalls. The device can be coupled to the towing vehicle using the EURO attachment and can be swivelled into the working position using a double-acting control unit.

- Use of carrier vehicles with different widths possible due to flexible construction
- Adjustment of the tines' engagement depth in two heights
- Adaptation to your cubicles and stalls
- Possible arm lengths: 990 mm / 1070 mm / 1360 mm / 1470 mm / 1790 mm / 1890 mm
- Max. hydraulic pressure 180 bar
- Connectors: 1 x double-acting

Designation	kg	Article no.
Box scraper	210	3621100



Hot-dip galvanized frame with 1.50 m, 2.00 m or 2.50 m working width. 3-point attachment.
Suitable for every type of riding ground.

Standard with:

- Adjustable upper linkage
- Sideboard roller wheel
- Hot-galvanised track leveller
- Replaceable tines
- Adjustable floating levelling blade
- 3-point attachment CAT 1 and CAT 2



Sideboard roller wheel as standard

Designation	kg	Article no.
Riding arena surface rake 1.50 m	90	3620150
Riding arena surface rake 2.00 m	120	3620200
Riding arena surface rake 2.50 m	135	3620250



Weed sweeper with steel bristles



Steel bristles



PPN bristles



Plastic-coated steel bristles

The düvelsdorf weed sweeper is ideal for removing deeply rooted weeds. It is perfect for cleaning waysides, including kerbsides and paved areas. It is available with steel, PPN or plastic-coated steel bristles depending on requirements.



Adjustable safety guard



Brush plate

- Mechanical adjustment of sweeper intensity through longitudinal and transverse tilt
- Jockey wheel with continuous height-adjustment
- Swivelling on both sides for vehicle widths up to 2.60 m
- Pendulum adjustment to adapt the height
- Brush plate with diameter of 70 cm
- 38 steel, PPN or plastic-coated steel bristles
- Convenient bristle replacement
- Adjustable safety guard
- Parking support
- EURO attachment
- Driven by high-powered hydraulic motor with overload protection
- Oil flow rate: Minimum 45 l/min (approx. 250 rpm), maximum 85 l/min (approx. 470 rpm)
- Bristles: Thread M12 / 300 mm long

Designation	kg	Article no.
Weed sweeper PPN	228	2822150
Weed sweeper steel	228	2822100
Weed sweeper steel, coated	228	2822160
PPN-bristle, each	1	2822140
Steel bristle, each	1	2822130
Steel bristle coated, each	1	2822135

Note: The hydraulic hose set as well as bristles require assembly. Assembly time approx. 1 hour.



Sweeping machine DKE, figure shows optional extra equipment subject to a charge

You will really like the düvelsdorf Stratos sweeping machine with its tried and tested design in conjunction with practical details. The collection pan, for example, has been fitted with height-adjustable spindles; it is also possible to assemble the side brush to the left or right. Of course, the tried and tested add-on parts still fit on the basic body. The sweeping machine is ideal for cleaning dirty roads, farmyard areas, feeding tables or silo plates.

- For attachment to front loader, or to the front or rear hydraulics
- 3-point attachment with pendulum adjustment for CAT 1 and CAT 2
- Pendulum and height adjustment for mounting to front loader or farmyard loader or attachment of own make
- Forklift attachment
- Incremental mechanical (or hydraulic) tilting (not possible with DKE 1.50 m and forklift)
- Mechanical collection pan-emptying mechanism (hydraulic as option)
- Brush diameter 58 cm (polypropylene)
- Brushes can rotate in both directions
- Height-adjustable spindles for support wheels and dirt pan
- Strengthened middle bolt
- Guide wheels mounted in ball bearings
- Assembly times sweeping machine 2 hours, side brush 1 hour



Bolt reinforcement

Accessories: see page 84 + 85

When mounted in the front, a 3rd support wheel is recommended.

	Designation	kg	Article no.
Attachment for pendulum adjustment	Stratos 1.50 m 3-point	265	4511156
	Stratos 1.70 m 3-point	303	4511170
	Stratos 2.25 m 3-point	345	4511220
	Stratos 2.70 m 3-point	388	4511270
Attachment for pendulum and height adjustment	Stratos 1.50 m EURO	330	4511157
	Stratos 1.70 m EURO	368	4511177
	Stratos 2.25 m EURO	410	4511227
	Stratos 2.70 m EURO	453	4511277
	Stratos 1.50 m Forklift attachment	260	4511153
	Stratos 1.70 m Forklift attachment	298	4511173
	Stratos 2.25 m with forklift attachment	340	4511223
	Stratos 2.70 m Forklift attachment	383	4511273
	Stratos 1.50 m pendulum height compensation without attachment	320	4511150
	Stratos 1.70 m pendulum height compensation without attachment	358	4511070
	Stratos 2.25 m pendulum height compensation without attachment	400	4511226
	Stratos 2.70 m pendulum height compensation without attachment	443	4511276
	Stratos 1.50 m Weidemann 36 mm (660 mm)	335	4511158
	Stratos 1.70 m Weidemann 36 mm (660 mm)	373	4511178
	Stratos 2.25 m Weidemann 36 mm (660 mm)	415	4511228
	Stratos 2.70 m Weidemann 36 mm (660 mm)	458	4511278
	Stratos 1.50 m Schäffer 42 mm (660 mm)	336	4511159
	Stratos 1.70 m Schäffer 42 mm (660 mm)	374	4511179
	Stratos 2.25 m Schäffer 42 mm (660 mm)	416	4511229
	Stratos 2.70 m Schäffer 42 mm (660 mm)	459	4511279
	Stratos 1.50 m Weidemann plate attachment	336	4511161
	Stratos 1.70 m Weidemann plate attachment	373	4511181
	Stratos 2.25 m Weidemann plate attachment	415	4511231
	Stratos 2.70 m Weidemann plate attachment	458	4511281
	Stratos 1.50 m Schäffer plate attachment	336	4511160
	Stratos 1.70 m Schäffer plate attachment	374	4511180
	Stratos 2.25 m Schäffer plate attachment	415	4511230
	Stratos 2.70 m Schäffer plate attachment	458	4511280
	Flow control valve		4550115

¹ Welding hooks come in 40 mm diameter and 660 mm spacing as standard, but are also available in 34 mm diameter and 860 mm spacing.

* Attention: Lower locking strap is enclosed loose!

All prices on request. Non-binding technical data, subject to alteration without notice!

Box scraper / Riding arena surface rake

Sweeping machines / brooms

Levelling blade / Soil auger

Concrete mixer



Spray equipment with 200 litre water storage tank



Brushes PPN



Brushes PPN/steel



3rd support wheel



Hydraulic tilting



Side brush PPN



Only 1 double-acting required
for operation and drive!

Hydraulic collection pan
operation

Designation	kg	Article no.
Hydraulic tilting Stratos	13	4550050
Hydraulic collection pan operation (attachment kit)	12	4550100
3rd support wheel (set) Stratos	20	4550400
Side brush PPN/steel Stratos	33	4740200
Side brush PPN Stratos	28	4740220
Brush 58 cm diameter, 75 cm long, PPN	12	45110757
Brush 58 cm diameter, 90 cm long, PPN	15	45100900
Brush 58 cm diameter, 75 cm long, PPN/steel	16	45111757
Brush 58 cm diameter, 90 cm long, PPN/steel	19	45111957
Spray equipment 1,50 m 12 V approx. 200 l	27	4740132
Spray equipment 1,70 m 12 V approx. 200 l	28	4740134
Spray equipment 2,25 m 12 V approx. 200 l	29	4740136
Spray equipment 2,70 m 12 V approx. 200 l	30	4740138

*Spray equipment is supplied without connection cable set.
Spray equipment is also available in 24 V each.
Hydraulic tilting is not possible when using spray equipment.

➤ Brushes with 52 cm diameter are available on request.

Box scraper / Riding arena surface rake

Sweeping machines / brooms

Levelling blade / Soil auger

Concrete mixer

STRATOS SWEEPING MACHINE



Illustration shows Stratos 1.70 m EURO, 3rd support wheel, spray equipment, hydraulic collection pan operation and a side brush PPN



Box scraper / Riding arena surface rake



EURO adapter



Power grab bucket attachment sweeper

The simple alternative to the sweeping machine. The device has 8 rows of brushes with 28 cm bristle length. Ideal for when speed is of essence. Simply insert the forklift tines into the pockets as far as they will go, tighten the toggle bolts and off you go.

- Robust steel construction
- Suitable for forklifts, wheel loaders and other carrier vehicles with pallet fork
- Hard-wearing brush elements (30 x 280 x 750 mm)
- Parking support
- Easy to replace brush elements

Designation	kg	Article no.
Standard sweeper 1.50 m	59	4510150
Standard sweeper 2.25 m	79	4510225
Standard sweeper 3.00 m	99	4510300
EURO adapter - Forklift forklift attachment	63	4510450
Power grab bucket attachment sweeper	31	4510480
Brush strip PPN	1.5	45100150



The düvelsdorf levelling blade helps to level surfaces quickly and easily.

- Levelling blade for 3-point attachment CAT 2
- Width 2.50 - 2.90 m
- Standard width extension 20 cm on each side
- Standard mechanical adjustment, 3-way adjustable
- Minimum and maximum clearing width between 2.20 and 2.90 m
- Blade can be set at an approx. tilt angle of max. 30° to the tractor
- Possible offset of approx. 40 cm to the left and right of the middle axis
- Sloping angle adjustable by 10°
- Adjustable support wheel as standard feature
- Sturdy frame
- Blade height approx. 45 cm
- Hardox 450 scrape rail
- Hydraulic mounting kit consisting of: Electrical switch, hose set, 3 double-acting cylinders
- 2 double-acting control units required



Designation	kg	Article no.
Hydraulic levelling blade	371	3610250

Note: Delivered unassembled. Final assembly approx. 4 hours



The düvelsdorf soil auger is delivered with a drill body. Drill bodies with a diameter of 150 mm, 300 mm and 450 mm are available. The drill bodies are equipped with exchangeable cutting blades. The drive shaft supplied is equipped with a safety friction clutch. It drives the oil bath gearbox. The drilling depth is 100 cm. The design of the soil auger permits safe, space-saving parking as well as easy coupling to the tractor.

- Ø drill bodies: 150 mm, 300 mm or 450 mm
- Drilling depth: 100 cm
- 3-point attachment CAT 2
- Powder-coated frame
- 2.3 l oil SAE 85W/90
- Perpendicular drilling indicator

Oil quantity with hydraulic drive:
Min. 90 l/min at max. 180 - 200 bar.
Attention! Fill the gear unit with oil before initial operation! Oil not included in delivery.



Designation		kg	Article no.
Soil auger incl. 150 mm drill body	NEW	169	3639110
Soil auger incl. 300 mm drill body		138	3639100
Soil auger incl. 450 mm drill body	NEW	230	3639120
Hydraulic drive for soil auger		140	3639040
Drill body 150 mm		34	3639005
Drill body 300 mm		40	3639004
Drill body 450 mm	NEW	95	3639007

Note: Delivered unassembled. Final assembly approx. 1 hour

All prices on request. Non-binding technical data, subject to alteration without notice!

Box scraper / Riding arena surface rake

Sweeping machines / brooms

Levelling blade / Soil auger

Concrete mixer



Attention! Fill the gear unit with oil before initial operation! Oil not included in delivery.

The düvelsdorf concrete mixer 750 can be used for quick, convenient, inexpensive and high-quality production of even large quantities of concrete, mortar and screed. It can also be used to mix dry TMR for calves, for example.

The concrete mixer can be picked up by the tractor hydraulic system or with a pallet fork.

Oil-bath gearbox drive with normal PTO profile.

Recommended tractor power: from 70 hp

- Solid workmanship
- Sturdy oil bath gearbox
- Spring-loaded stirring arms with adjustable stirring blades
- Side wall scraper
- 3-point attachment CAT 2
- Sheet thickness: floor 6 mm / wall 5 mm in S235
- Drive: 1100 Nm
(4.3 l oil SAE 85/W90 or SAE 90 EP)

Scope of supply

- Splashguard, tilting bar, Side wall scraper, chute, bag opener and heavy safety grid

Optional

- Drive shaft with shear bolts
- Swivelling chute

Designation	kg	Article no.
Concrete mixer DBM 750 L	570	7525500
Drive shaft with shear bolts	13	7525002
Swivelling concrete chute	32	7525100

ADJUSTABLE PASTURE GATE



Height 110 cm



- Adjustable width
- Hot-dip galvanised
- With 2 adjustable eyes and 2 locking bolts

- Accessories:
- Universal posts, hot-dip galvanised
 - Dimensions: 200 x 9 x 9 cm, Wall thickness 3 mm with 2 slopes and 2 holes for lock
 - Suspension for pasture gate, hot-dip galvanised
 - Pasture gate lock with chain

Designation	kg	Article no.
Pasture gate 2-3 m	38	2011023
Pasture gate 3-4 m	49	2011034
Pasture gate 4-5 m	60	2011045
Pasture gate 5-6 m	71	2011056
Universal posts	17	2011501
Pasture gate suspension	1	2010200
Pasture gate lock with chain	0.8	2010300

ROUND PASTURE FEEDER WITH 9 OR 12 FEEDING PLACES



Round pasture feeder standard with 9 or 12 feeding places. This round pasture feeder is a tried and tested standard model for pasture feeding. You can easily transport it with the tractor's linkage drawbar.

The circular arrangement lets lower-ranking animals feed at the same time. The standard round pasture feeder is filled from above using a front loader or manually from the side.

- 9 feeding places Ø 1.7 m
- 12 feeding places Ø 2.3 m



Designation	kg	Article no.
Round pasture feeder 9 places	145	1070100
Round pasture feeder 12 places	198	1070200

SQUARE PASTURE FEEDERS



- With 12 feeding places
- Transport with linkage drawbar possible
- With collecting trough and roof covering
- Roof with protected corners
- Roof adjustable in height
- Supplied unassembled

Technical data:

- Length 2000 mm
- Width 2000 mm
- Height approx. 2600 mm



Corner protection for the roof



- With 8 feeding places
- Folding attachment
- Forklift pockets
- With collecting trough and roof covering
- Roof with corner protection all around
- Roof adjustable in height
- Supplied unassembled

Technical data:

- Length 1500 mm
- Width 1500 mm
- Height approx. 2200 mm

Designation	kg	Article no.
Square pasture feeder with palisade feeding grating, 12 feeding places	360	1050550
Square pasture feeder with palisade feeding grating, 8 feeding places	225	1050530

Note: Delivered unassembled. Final assembly approx. 2 hours



Splash-proof transport box for transporting and storing e.g. tools, chainsaws or similar utensils.

- 3-point attachment CAT 1 and CAT 2
- with triangle hitch CAT 0 attachment to smaller vehicles
- Load capacity 1.20 m: approx. 300 kg
- Load capacity 1.60 m: approx. 400 kg
- Sheet thickness: 2 mm
- Attachment points for castors available



Designation	kg	Article no.
Transport box 1.20 m, internal dimensions = 1200 x 650 x 500 mm	110	3520010
Transport box 1.60 m, internal dimensions = 1600 x 650 x 500 mm	125	3520015
Municipal triangle CAT 0 for transport box	13	3520019
Set of 4 castors	6,5	210500



The düvelsdorf HD transport box is ideal for agriculture and forest management, contractors or local authorities. With a width of 1.8 m and an interior volume of 1100 litres, the box can transport tools, seeds, canisters or other utensils. The interior can be divided with two individually moveable partitions to organise storage. The box is splash-proof, lockable and opens comfortably thanks to gas pressure dampers.



Furthermore, the HD transport box is equipped with a front position lamp, mounting plates for swivel castors and a drive-in opening for forklift trucks. The three-point attachment (CAT 1 and CAT 2) allows the transport box to be quickly and safely mounted on the tractor. The load capacity is 1000 kg.

Designation	kg	Article no.
HD transport box 1.80 m, internal dimensions = 1790 x 890 x 900 mm	290	3520000
Set of 4 castors	6,5	210500



The rear container HD is suitable for heavy-duty operations. With a load capacity of 2.5 t and internal dimensions of W x D x H 1805 x 1240 x 600 mm, the rear container is suitable for transporting two EURO pallets with the flap closed.

With the optional accessories, the volume can be increased from 1.35 m³ by 0.35 m³ with the 300 mm side wall extension or 1.15 m³ with the 500 mm side wall extension. The 300 mm and 500 mm side wall extensions can be combined with each other. All other accessories can only be mounted individually on the machine. The rear container HD can be attached to the three-point CAT 2 and using EURO attachments on the front loader. With a dumping angle of 90°, the rear container can be used as a high-dump shovel in the front loader.

Designation	kg	Article no.
Rear container HD 2.00 m	585	3521300
Side wall extension 300 mm	22	3521330
Side wall extension 500 mm	154	3521350
Posts (for elevation)	28	3521360
Swivelling flap	8,5	3521370



Side wall extensions 300 mm and 500 mm



Posts (for elevation)



Swivelling flap



Rear containers can be used as transport containers for tools and bulk goods. The standard rear container has a pendulum-mounted removable rear flap and a scrape rail.

- 3-point attachment CAT 1 and CAT 2
- Mechanical tipping device
- Universal for all tractors
- Low tare weight
- Load capacity: 500 kg
- Sheet thickness: 2 mm



Mechanical tipping device

Designation	kg	Article no.
Rear container standard 1.20 m, internal dimensions = 1200 x 800 x 600 mm	102	3520020
Rear container standard 1.40 m, internal dimensions = 1400 x 800 x 600 mm	113	3520040
Rear container standard 1.60 m, internal dimensions = 1600 x 800 x 600 mm	123	3520060
Rear container standard 1.80 m, internal dimensions = 1800 x 800 x 600 mm	133	3520080
Rear container standard 2.00 m, internal dimensions = 2000 x 800 x 600 mm	143	3520090



A practical rear container for the 3-point attachment with particularly solid workmanship and mechanical tipping device. This creates a transport and storage option for every tractor.

- With rear flap
- Solid workmanship
- 3-point attachment CAT 1 and CAT 2
- Load capacity: 800 kg
- Scrape rail
- Sheet thickness: 2 mm



Mechanical tipping device

Designation	kg	Article no.
Rear container 1.40 m mechanical, internal dimensions = 1370 x 1000 x 400 mm	170	3520140
Rear container 1.60 m mechanical, internal dimensions = 1570 x 1000 x 400 mm	188	3520160
Rear container 1.80 m mechanical, internal dimensions = 1770 x 1000 x 400 mm	206	3520180



Hydraulic dump device, approx. 60° / EW



Hydraulic rear container elevation

- With rear flap
- Solid workmanship
- 3-point attachment CAT 1 and CAT 2

- Load capacity 1000 kg
- Scrape rail
- Sheet thickness: 3 mm

Designation	kg	Article no.
Rear container 1.60 m hydraulic, internal dimensions = 1560 x 1150 x 400 mm	339	3521160
Rear container 1.80 m hydraulic, internal dimensions = 1760 x 1150 x 400 mm	355	3521180
Rear container 2.00 m hydraulic, internal dimensions = 1960 x 1150 x 400 mm	372	3521200
Hydraulic rear container elevation, all sizes, height 400 mm	25	3521220



The standard EURO container can easily be mounted in the tractor's EURO attachment and is therefore ready for use very quickly. This lets you transport objects safely and conveniently with the front loader.



- With front flap
- Solid workmanship
- EURO attachment
- Load capacity 500 kg
- Scrape rail
- Sheet thickness: 2 mm
- Attachment points for castors available

Designation	kg	Article no.
EURO container standard 2.00 m, internal dimensions: 2000 x 1000 x 600 mm	154	3520590
Set of 4 castors	6,5	210500



- For Euro quick-change frames
 - With wooden protection strip on the handrail
 - With tool tray
 - EC type approval
 - Self-closing door
 - Circular spirit level for indication of inclined position
- Optional
- Elevation by 1.00 m

Before commissioning, the combination (work platform, front loader, tractor) must be approved. The inspection is subject to a fee.
Attention: Elevation is only suitable for work platforms built 2018 or later

Designation	kg	Article no.
Work platform 1.10 m, internal dimensions: 1040 x 790 x 1100 mm	180	3523050
Elevation for work platform 1.10 m	95	3523055
Work platform 1.60 m, internal dimensions: 1540 x 790 x 1100 mm	245	3523100
Elevation for work platform 1.60 m	110	3523105

Stainless steel



Oil flow rate: Min. 20 l/min,
max. 60 l/min. at max. 180 bar. If these
values are exceeded, then a flow control
valve must be fitted!

Figure shows optional extra equipment subject to a charge

- Drive via hydraulic motor with 4.00 m hose (requires 1 single-acting and 1 non-pressurised return flow line)
- Overall length 3.00 m / 4.00 m, Ø 140 mm
- Stainless steel for a long service life
- Filling hopper with sieve
- Cleaning slide gate for easy cleaning
- Painted attachment parts to fit all tipper vehicles
- Sloping adjustment by means of rope pulleys and metal braces
- Output of up to 20 t/h

Optional

- Switch-off via bypass with shut-off valve and hoses
- Discharge hose, 1.2 m with clamp
- Rope winch



Filling hopper with sieve



Cut-off valve

Designation	kg	Article no.
Screw conveyor 3.00 m	94	4210150
Screw conveyor 4.00 m	122	4210240
Shutdown via bypass	2	4230100
Discharge hose, 1.20 m with clamp	2	4210400
Rope winch	5	4210490



The combination log gripper has both a front loader EURO attachment and a 3-point attachment CAT 2.

The robust multi-purpose blade with chain slots can be used for stacking tree trunks, pushing them together and lifting them. The robust frame design offers many coupling options that are suitable for any tractor.

The gripper can be either rigidly or pendulum-suspended. A perfectly safe conversion to the rigid version is possible without tools by simply inserting the locking bolts. It is not necessary to dismantle the gripper.

- Min. gripper opening 200 mm
- Max. gripper opening 1560 mm
- Cylinder closing force 9000 kg
- Pendulum-mounted in universal joint
- Tractor rating from 44 kW
- 1 double-acting connection required

Optional

- Hydro drive

Designation	kg	Article no.
Log gripper COMBI	285	3523370
Hydraulic drive log gripper COMBI	15	3523175

LOG GRIPPER COMBI ROTATOR

**NEW**

The log gripper with rotator is suitable for stacking and moving logs. The endless rotator with a load capacity of 4.5 t and the gripper with an opening width of 1560 mm enable comfortable work. It can be attached to the front loader with a EURO mount or in the three-point hitch with a CAT 2 mount.

Two double-acting control units are required for operation. The functional shield is equipped with chain slots and offers the possibility of stacking and pushing logs together.

Designation	kg	Article no.
Log gripper COMBI Rotator	285	3523350

TIMBER GRAB EURO

**NEW**

The timber grab with double hydraulic upper arm makes it safe and practical to move, stack and load logs from the carrier vehicle. The large opening width can pick up several trunks safely and quickly at the same time.

- Load capacity: up to 1600 kg
- Opening width:
min. 140 mm - max. 1250 mm
- Width: 1200 mm
- Depth: 1000 mm

- 1 x double-acting connection required
- EURO attachment
- Robust device for use in agriculture, forestry and municipal services, etc.

Designation	kg	Article no.
Timber grab	300	3523500

REINFORCED CONCRETE WEIGHT



Designation	kg	Article no.
Reinforced concrete weight 450 kg Black	450	2821100
Reinforced concrete weight 750 kg Black	756	2821200
Reinforced concrete weight 1050 kg Black	1056	2821300
Reinforced concrete weight 1450 kg Black	1456	2821400
Trailer manoeuvring aid	6	2821450
Reinforced concrete weight 450 kg Grey, with trailer manoeuvring aid	456	2821120
Reinforced concrete weight 750 kg Grey, with trailer manoeuvring aid	750	2821220
Reinforced concrete weight 1050 kg Grey, with trailer manoeuvring aid	1050	2821320
Reinforced concrete weight 1450 kg Grey, with trailer manoeuvring aid	1450	2821420

REINFORCED CONCRETE WEIGHT BOX



Designation		kg	Article no.
Reinforced concrete weight box 1050 kg Grey	NEW	1050	2821500
Reinforced concrete weight box 1250 kg Grey	NEW	1250	2821510
Reinforced concrete weight box 1450 kg Grey	NEW	1450	2821520
Reinforced concrete weight box 1550 kg Grey	NEW	1550	2821530
Reinforced concrete weight box 1750 kg Grey	NEW	1750	2821540

All prices on request. Non-binding technical data, subject to alteration without notice!

Pasture gates / Pasture feeders

Transport boxes

Rear containers

Work platforms / Screw conveyors

Forestry devices

REINFORCED CONCRETE WEIGHT
MUNICIPAL TRIANGLE



Designation	kg	Article no.
Reinforced concrete weight municipal triangle 150 kg grey	150	2821600
Reinforced concrete weight municipal triangle 250 kg grey	250	2821610

REINFORCED CONCRETE WEIGHT CAT 0 - 1



Designation	kg	Article no.
Reinforced concrete weight 0-1 250 kg Grey	250	2821620
Reinforced concrete weight 1 400 kg Grey	400	2821630
Reinforced concrete weight 1 700 kg Grey	700	2821640

MAGNETITE WEIGHT




Designation	kg	Article no.
Magnetite weight CAT 2 600 kg grey	600	2827100
Magnetite weight CAT 2 900 kg grey	900	2827120
Magnetite weight CAT 2 1250 kg grey	1250	2827140
Magnetite weight CAT 2 1600 kg grey	1600	2827160
Magnetite weight CAT 2 2000 kg grey	2000	2827180
Magnetite weight CAT 2 2500 kg grey	2500	2827200


REAR WEIGHT




Designation	kg	Article no.
Rear weight CAT 2 600 kg grey	600	2821800
Rear weight CAT 2 900 kg grey	900	2821810
Rear weight CAT 2 1250 kg grey	1250	2821820
Rear weight CAT 2 1450 kg grey	1450	2821830

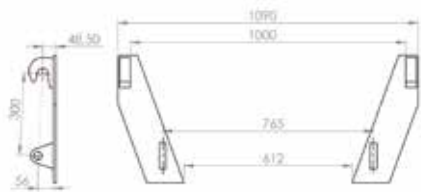


Coupling plates EURO straight

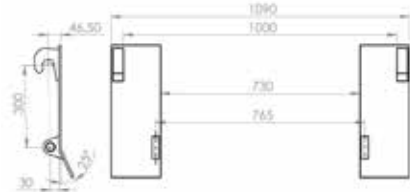


Coupling plates EURO angled

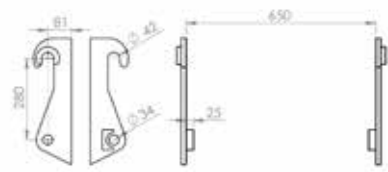


Schäffer 34mm (650mm)




Schäffer 42mm (660mm)

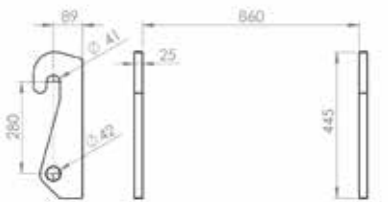


Schäffer 42mm (860mm)



Weidmann 36 mm (660 mm)

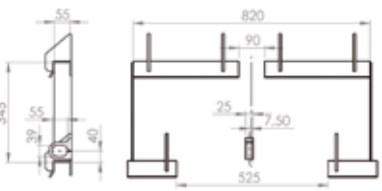

Schäffer plate attachment

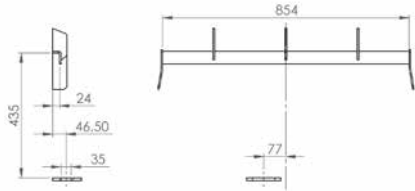

Weidmann plate attachment

Designation	Article no.
Coupling plates EURO straight	3519095
Coupling plates EURO angled	3519090

INDIVIDUALLY WELDED ON ATTACHMENTS



NEW



Designation	Article no.
Atlas 32-40	5110090
Atlas AR40 - AR80	5110080
Bobcat skid steer loader mini (440)	5110170
Bobcat Telehandler	5110180
CASE	5110320
CAT wheel loader 902-908	5110190
CLAAS Scorpion	5110140
DIECI AGRI Pivot T40 - T70	5110420
Fuchs farmyard loader	5110400
GIANT 562mm	5110200
GIANT 802mm	5110205
Hauer B (1180 mm)	5110130
Hauer N (1060 mm)	5110135
JCB 406-409	5110210
JCB Q-fit	5110217
JCB Q-fit Agri	5110215
Komatsu WA65-85	5110160
Kramer 180 - 350	5110380
Kramer 312-950	5110340
Kramer telescopic loader	5110390
Liebherr 507-509 z-kinematics	5110350
Liebherr L506	5110355
Manitou	5110100
Massey Ferguson Telehandler	5110310
Matbro telescopic loader	5110370
Merlo ZM2	5110110
MultiOne	5110220

Designation	Article no.
Schaeff SKL 833-871	5110230
Schäffer 34mm (650mm)	3519117
Schäffer 42mm (660mm)	3519116
Schäffer 42mm (860mm)	3519114
Schäffer plate attachment	3519119
Schäffer wheel loader	5110410
Skid steer	5110250
SMS Trima	5110240
Striegel plate attachment	5110360
Terex TL-80-120	5110260
Thaler	5110270
Volvo L20-25	5110120
Volvo L30-35	5110125
Weidemann 36 mm (660 mm)	3519115
Weidemann plate attachment	3519118
Weidemann wheel loader	5110430
Yanmar V80-100	5110280
Zeppelin ZL80-120	5110290
Zettelmeyer AL 802Si	5110335
Zettelmeyer ZL402	5110300
Zettelmeyer ZL502-602B	5110330
Zettelmeyer ZL802 - ZL1002	5110440

Reinforced concrete weights

Customisations

Indexes

Other attachments are possible on request.
Please contact us or your dealer with your needs!

As of now, düvelsdorf offers the D-LOCK attachments, which can be bolted to work equipment individually. This makes it possible to equip various implements with the specific attachment of your carrier vehicle.

The principle is very simple: A mounting frame is attached to the machine, and the suitable mount is simply bolted on to that frame. When ordering, please indicate the article number of the machine and attachment (see table below).

Due to the working width, not all bolting attachments fit every machine.

Narrow implements are marked with D-LOCK s. The following table shows which attachments fit the D-LOCK s. First of all, there are different D-LOCK rubber blades. It is also planned to significantly expand the range in the future.

Designation	D-LOCK	D-LOCKS s	Article no.
Atlas 32-40	✓	✓	5120090
Atlas AR40 - AR80	✓	-	5120080
Bobcat Loader mini (440)	✓	✓	5120170
Bobcat Telehandler	✓	✓	5120180
CASE	✓	-	5120320
CAT wheel loader 902-908	✓	-	5120190
CLAAS Scorpion	✓	-	5120140
DIECI attachment	✓	✓	5120420
EURO attachment	✓	-	5129990
Fuchs farmyard loader	✓	✓	5120400
GIANT 562mm	✓	✓	5120200
GIANT 802mm	✓	-	5120205
JCB 406-409	✓	✓	5120210
JCB 540-70 Agri	✓	-	5120215
JCB Q-fit	✓	-	5120217
Komatsu WA65-85	✓	-	5120160
Kramer 180 - 350	✓	✓	5120380
Kramer 312-950	✓	-	5120340
Kramer telescopic loader	✓	-	5120390
Liebherr 507-509 z-kinematics	✓	-	5120350
Liebherr L506	✓	-	5120355
Manitou	✓	-	5120100
Massey Ferguson Telehandler	✓	✓	5120310
Merlo ZM2	✓	-	5120110
MultiOne	✓	✓	5120220
Schaeff SKL 833-871	✓	-	5120230

D-LOCK BOLTED ATTACHMENTS



NEW



Designation	D-LOCK	D-LOCKS s	Article no.
Schäffer 34mm (650mm)	✓	✓	5120030
Schäffer 42mm (660mm)	✓	✓	5120010
Schäffer 42mm (860mm)	✓	-	5120020
Schäffer plate attachment	✓	✓	5120035
Schäffer wheel loader	✓	-	5120410
Skid steer	✓	-	5120250
SMS Trima	✓	✓	5120240
Striegel plate attachment	✓	✓	5120360
Terex TL-80-120	✓	-	5120260
Thaler	✓	✓	5120270
Volvo L20-25	✓	✓	5120120
Volvo L30-35	✓	-	5120125
Weidemann 36 mm (660 mm)	✓	✓	5120040
Weidemann plate attachment	✓	✓	5120050
Weidemann wheel loader	✓	-	5120430
Yanmar V80-100	✓	-	5120280
Zeppelin ZL80-120	✓	-	5120290
Zettelmeyer AL 802Si	✓	-	5120335
Zettelmeyer ZL402	✓	-	5120300
Zettelmeyer ZL502-602B	✓	-	5120330
Zettelmeyer ZL802 - ZL1002	✓	-	5120440

Reinforced concrete weights


Customisations

Indexes



Rubber blade 3.60 m D-LOCK with screwed Schäffer attachment

INDEX SORTED

Products	Page
3-point attachment with trailer-hitch ball	59
Adapter 2.5 t Schäffer 34 mm (650 mm)	61
Adapter 2.5 t Schäffer 42 mm (660 mm)	61
Adapter 2.5 t Schäffer 42 mm (860 mm)	61
Adapter 2.5 t Weidemann 36 mm (660 mm)	61
Adapter 2.5 t without attachment	61
Adapter 3-point CAT 2 - EURO	61
Adapter EURO - Three-point CAT 2	61
Adapter Schäffer 34 mm (650 mm)	62
Adapter Schäffer 42 mm (660 mm)	62
Adapter Schäffer 42 mm (860 mm)	62
Adapter Weidemann 36 mm (660 mm)	62
Adapter without attachment	62
Bale cutting bucket	53
Bale cutting fork	53
Bale transport fork 3-point	55
Bale transport fork 3-point hinged	55
Bale transport fork EURO	54
Bale wrapper	35
Big Bag holder Euro	59
Box scraper	78
Bulk material EURO	39
Comfort snow blade	66
Comfort snow blade collision protection	67
Comfort snow plough	69
Concrete mixer 750 l	90
Crate rotating device	58
Drum mower  cut	30
EURO adapter - Forklift forklift attachment	61
EURO container standard	100
Fodder clearing machine	77
Fork-and-grab EURO	46
Fork-and-grab Schäffer	46
Fork-and-grab Schäffer plate attachment	46
Fork-and-grab Weidemann	46
Fork-and-grab Weidemann plate attachment	46
Forklift snow blade	65
Front packer	27
Grassland harrow 2 m	11
Grassland harrow 3 m	11
Grassland harrow 4 m	12
Grassland harrow 5 m	12
Grassland harrow 6 m	13
Grassland harrow 6 m with tine section	14
Grassland harrow 8 m	13
Grassland harrow HD	17

INDEX SORTED

Products	Page
Grassland harrow HDO	16
Grassland harrow LDO	15
GREEN.RAKE mini	10
GREEN.ROLLER classic	23
GREEN.ROLLER classic chassis	24
GREEN.ROLLER eco	25
Hydraulic bale transport fork EURO	56
Hydraulic levelling blade	88
Lawn roller	25
Light goods bucket compact	43
Light goods bucket EURO	37
Light goods bucket Schäffer	45
Light goods bucket Schäffer plate attachment	45
Light goods bucket Weidemann	45
Light goods bucket Weidemann plate attachment	45
Log gripper Combi	103
Log gripper Combi Rotator	104
Magnetite weight CAT 2	107
Maize leveller	33
Manure and silage fork EURO	40
Manure bucket EURO	41
Manure fork EURO	39
Manure fork with pawl attachment	36
Municipal snow blade	64
Municipal snow plough	68
Pallet fork EURO	57
Pallet fork support unit	58
Pasture gate	91
Power grab bucket attachment sweeper	87
Power grab bucket compact	43
Power grab bucket EURO	42
Rear container hydraulic	99
Rear container mechanical	98
Rear container standard	97
Rear containers HD	95
Rear weight CAT 2	107
Reinforced concrete weight	105
Reinforced concrete weight box	105
Reinforced concrete weight CAT 0-1	106
Reinforced concrete weight municipal triangle	107
Riding arena surface rake	79
Round bale fork 3-point	52
Round bale fork Combi	51
Round bale fork DUO	52
Round bale fork solo	50
Round bale gripper EURO	48

Reinforced concrete weights

Customisations

Indexes

INDEX SORTED

Products	Page
Round pasture feeder	91
Rubber blade 2.60 m 3-point/forklift	72
Rubber blade 2.60 m 70° steel inlay	76
Rubber blade 2.60 m 70° textile inlay	76
Rubber blade 2.60 m Combi	74
Rubber blade 2.60 m EURO/forklift	72
Rubber blade 2.60 m power grab bucket attachment	71
Rubber blade 3.00 m, pendulum-mounted	74
Rubber blade 3.60 m D-LOCK	73
Rubber blade 3.60 m, m Combi	73
Rubber blade D-LOCK steel inlay	71
Rubber blade D-LOCK textile inlay	71
Rubber blade EURO steel inlay	70
Rubber blade EURO textile inlay	70
Rubber blade mech. Weidemann	75
Rubber blades mechanical EURO	75
Screw conveyor	102
Silage roller	32
Soil auger	89
Soil bucket EURO	38
Soil bucket Schäffer	44
Soil bucket Schäffer plate attachment	44
Soil bucket Weidemann	44
Soil bucket Weidemann plate attachment	44
Soil bucket with pawl attachment	36
Square pasture feeder palisade feeding grating	92
Standard sweeper	87
Stratos sweeping machine	82
Stratos sweeping machines for tractors	82
Swing arm mower	31
Telescopic maize leveller	34
TERRA.ROLLER eco	28
Three-point with trailer-hitch ball	59
Thumb for pallet fork	58
Timber grab	104
Tipping bucket	47
Tractor triangle hitch CAT 2	60
Transport box	93
Transport box HD	94
Triangle hitch	60
Universal bale gripper	49
Upper link connection adapter EURO - three-point CAT 2	61
Wedge-shaped rubber blade	76
Weed sweeper	80
Work platform	101

QUALITY FROM OUR OWN MANUFACTURING



The photographs give a little insight into our own production plant in Western Ukraine. As a producer, we are able to monitor every production step precisely through our own factory and can therefore guarantee very high quality.

Reinforced concrete weights

Customisations

Indexes



düvelsdorf

Machinery and equipment for agriculture and forestry

Düvelsdorf Handelsgesellschaft mbH · Im Forth 10 · 28870 Ottersberg

Tel.: +49 4205 3162 0 · Fax: +49 4205 3162 20 · info@duevelsdorf.de · www.duevelsdorf.de