

# Product catalogue 2026



**düvelsdorf**

Machinery and equipment for agriculture and forestry





## QUALITY FROM OUR OWN PRODUCTION EXPERT, EXACTING AND RELIABLE

The düvelsdorf company is your expert partner for the development, manufacture and distribution of machinery and equipment for agriculture, municipal services and industry.

Over 100 years, düvelsdorf has developed into an agricultural machinery manufacturer operating throughout Europe. The machines especially stand out as they have a long service life and are practical to use.

If you have any questions about the products, please contact your local düvelsdorf dealer, who will be delighted to help you.

Sincerely,  
Your düvelsdorf team

**Sweepers and sweeping machines .. 6**

Standard sweeper ..... 6  
 Standard HD sweeper ..... 7  
 Stratos sweeping machine ..... 9  
 Stratos Profi sweeping machine ..... 12  
 Weed sweeper ..... 17

**Hedge trimmer ..... 18**

**Work platforms ..... 22**

**Shovels and forks. .... 24**

Manure fork pawl attachment ..... 24  
 Soil bucket pawl attachment..... 24  
 Light goods bucket EURO ..... 25  
 Soil bucket EURO ..... 26  
 Bulk material bucket EURO ..... 27  
 Manure fork EURO ..... 27  
 Manure and silage fork EURO ..... 28  
 Manure bucket EURO ..... 29  
 Power grab shovel bucket EURO ..... 30  
 Power grab shovel bucket compact ..... 31  
 Light goods bucket compact ..... 31  
 Soil bucket for farmyard loaders ..... 32  
 Light goods bucket for farmyard loaders. 33  
 Fork-and-grab for farmyard loader..... 34

**Bale and load transport ..... 35**

Round bale gripper ..... 35  
 Round bale forks ..... 36  
 Bale transport forks ..... 39  
 Bale cutting bucket ..... 42  
 Pallet forks ..... 44  
 Pallet thumb ..... 46  
 Crate rotating device ..... 47  
 Big bag holder ..... 48

**Fodder clearing machine..... 48**

**Box scraper ..... 49**

**Rubber scrapers ..... 50**

**Snow blades and ploughs ..... 58**

Municipal snow blade ..... 58  
 Forklift snow blade ..... 59  
 Comfort snow blade ..... 60  
 Comfort snow blade AFS ..... 61  
 Municipal snow plough ..... 62  
 Comfort snow plough ..... 63

**Transport boxes ..... 64**

**Rear containers ..... 66**

**Grassland maintenance ..... 72**

**GREEN.RAKE** mini ..... 73  
 Grassland harrow 2.00 m - 8.00 m ..... 74  
 Grassland harrow with tine section ..... 76  
 Grassland harrows HD ..... 78  
 Grassland harrows HDO ..... 79  
 Greenland harrow accessories ..... 80

**Rollers ..... 83**

**GREEN.ROLLER** classic ..... 83  
**GREEN.ROLLER** classic chassis ..... 84  
**GREEN.ROLLER** eco ..... 85  
 Lawn roller ..... 85  
 Front packer ..... 87  
**TERRA.ROLLER** eco..... 88

**Mowers and mulchers ..... 90**

Drum mower ..... 90  
 Swing arm mower ..... 91

**Silage technology ..... 92**  
    Silage roller pro ..... 92  
    Silage roller basic ..... 94  
    Maize leveller ..... 95  
    Folding maize leveller ..... 96  
    Telescopic leveller ..... 98

**Levelling blade..... 100**

**Riding arena surface rake ..... 101**

**Auger ..... 102**

**Concrete mixer..... 103**

**Screw conveyors ..... 104**

**Square pasture feeders ..... 105**

**Forestry devices ..... 106**

**Reinforced concrete weights ..... 108**

**Adapters and tractor  
triangle hitches ..... 111**

**Hydraulic couplings ..... 116**

**Individually welded attachments. 118**

**D-LOCK bolted attachments..... 120**

**Index ..... 122**

**Overview of use case videos ..... 126**

## STANDARD SWEEPER



EURO adapter

Ideal for when speed is of essence. Simply insert the forklift tines into the pockets as far as they will go, tighten the toggle bolts and off you go. The device has 8 rows of brushes with 28 cm bristle length.



Power grab shovel bucket attachment sweeper

- Robust steel construction made from 3 mm sheet metal
- Suitable for forklift trucks, wheel loaders and other carrier vehicles with pallet forks
- Heavy-duty brush elements (30 x 280 x 750 mm)
- Parking support
- Easy-to-replace brush elements

Designation	kg	Article no.
Standard sweeper 1.50 m	59	4510150
Standard sweeper 2.25 m	79	4510225
Standard sweeper 3.00 m	99	4510300
Brush strip PPN	1.5	45100150

# STANDARD HD SWEEPER



EURO attachment

- Sturdy body made from 5 mm sheet metal
- Works better thanks to the angled outer brush strips
- Angled outer brush strips on both long sides mean that the brush works in both directions of travel
- Stable parking supports for safe attachment
- Different attachments offer high flexibility

Technical data			
Working width	1.5 m	2.25 m	3 m
Number of brush rows	9	9	9
Number of brush strips	16	25	32
Bristle length	280 mm	280 mm	280 mm
Dimensions of forklift pockets (WxH)	180 x 70 mm	180 x 70 mm	180 x 70 mm
Dimensions of forklift pockets with locking mechanism (WxH)	155 x 70 mm	155 x 70 mm	155 x 70 mm

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## STANDARD HD SWEEPER



Forklift attachment



D-LOCK attachment  
(with Schäffer attachment fitted)



Power grab shovel bucket attachment

Designation	kg	Article no.
Standard HD sweeper 1.50 m EURO	129	4510500
Standard HD sweeper 1.50 m D-LOCK	140	4510510
Standard HD sweeper 1.50 m power grab shovel bucket attachment	149	4510520
Standard HD sweeper 1.50 m forklift attachment	108	4510530
Standard HD sweeper 2.25 m EURO	172	4510600
Standard HD sweeper 2.25 m D-LOCK	183	4510610
Standard HD sweeper 2.25 m power grab shovel bucket attachment	192	4510620
Standard HD sweeper 2.25 m forklift attachment	151	4510630
Standard HD sweeper 3.00 m EURO	207	4510700
Standard HD sweeper 3.00 m D-LOCK	218	4510710
Standard HD sweeper 3.00 m power grab shovel bucket attachment	227	4510720
Standard HD sweeper 3.00 m forklift attachment	186	4510730
Forklift entry pockets (also optional for EURO, D-LOCK or power grab shovel bucket attachment)	11	4510940

## STRATOS SWEEPING MACHINES



Stratos 2.25 m EURO with optional equipment



- Three-point attachment with pendulum adjustment, CAT 1 and CAT 2 (spread deviates from standard)
- Attachments with pendulum and height adjustment for mounting to front loader or farmyard loader
- Forklift attachment
- Gradual mechanical tilting by 20°
- Mechanical collection pan-emptying mechanism
- Brush diameter 58 cm (polypropylene)
- Brush can be rotated in both directions (not possible when the collection pan is operated hydraulically)
- Spindles for adjusting the height of the support wheels and collection pan
- Guide wheels mounted in ball bearings

Optional:

- Hydraulic tilting (only possible with three-point)
- Hydraulic collection pan operation
- Third Stratos support wheel
- Side sweeper right PPN or PPN/steel

(Assembly times: sweeping machine 2 hours,  
side sweeper 1 hour)



Hydraulic tilting

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## STRATOS SWEEPING MACHINES

Designation	kg	Article no.
Stratos 1.50 m 3-point	265	4511156
Stratos 1.50 m EURO <sup>4</sup>	330	4511157
Stratos 1.50 m forklift attachment <sup>4</sup>	260	4511153
Stratos 1.50 m Weidemann 36 mm (660 mm) <sup>4</sup>	335	4511158
Stratos 1.50 m Schäffer 42 mm (660 mm) <sup>4</sup>	336	4511159
Stratos 1.50 m Weidemann plate attachment <sup>4</sup>	336	4511161
Stratos 1.50 m Schäffer plate attachment <sup>4</sup>	336	4511160
Stratos 1.50 m pendulum/height adjustment without attachment <sup>4</sup>	320	4511150
Hydraulic tilting Stratos <sup>1</sup>	13	4550050
Hydraulic collection pan operation (attachment kit) <sup>2</sup>	12	4550100
Third Stratos support wheel (attachment kit) <sup>3</sup>	20	4550400
Side sweeper right PPN Stratos 1.50 m <sup>2</sup>	28	4740230
Side sweeper right PPN/steel Stratos 1.50 m <sup>2</sup>	33	4740235
Brush set PPN/steel 1.50 m (surcharge)	6	4845075
Stratos 1.70 m 3-point	303	4511170
Stratos 1.70 m EURO	368	4511177
Stratos 1.70 m forklift attachment	298	4511173
Stratos 1.70 m Schäffer 42 mm (660 mm)	374	4511179
Stratos 1.70 m Weidemann plate attachment	373	4511181
Stratos 1.70 m Weidemann 36 mm (660 mm)	373	4511178
Stratos 1.70 m Schäffer plate attachment	374	4511180
Stratos 1.70 m pendulum/height adjustment without attachment	358	4511070
Hydraulic tilting Stratos <sup>1</sup>	13	4550050
Hydraulic collection pan operation (attachment kit) <sup>2</sup>	12	4550100
Third Stratos support wheel (attachment kit) <sup>3</sup>	20	4550400
Side sweeper right PPN Stratos 1.70 m <sup>2</sup>	28	4740240
Side sweeper right PPN/steel Stratos 1.70 m <sup>2</sup>	33	4740245
Brush set PPN/steel 1.70 m (surcharge)	9	4845080
Stratos 2.25 m 3-point	345	4511220
Stratos 2.25 m EURO	410	4511227
Stratos 2.25 m with forklift attachment	340	4511223
Stratos 2.25 m Weidemann 36 mm (660 mm)	415	4511228
Stratos 2.25 m Schäffer 42 mm (660 mm)	416	4511229
Stratos 2.25 m Weidemann plate attachment	415	4511231
Stratos 2.25 m Schäffer plate attachment	415	4511230
Stratos 2.25 m pendulum/height adjustment without attachment	400	4511226

# STRATOS SWEEPING MACHINE

Designation	kg	Article no.
Hydraulic tilting Stratos <sup>1</sup>	13	4550050
Hydraulic collection pan operation (attachment kit) <sup>2</sup>	12	4550100
Third Stratos support wheel (attachment kit) <sup>3</sup>	20	4550400
Side sweeper right PPN Stratos 2.25 m <sup>2</sup>	28	4740250
Side sweeper right PPN/steel Stratos 2.25 m <sup>2</sup>	33	4740255
Brush set PPN/steel 2.25 m (surcharge)	14	4845090
Stratos 2.70 m 3-point	388	4511270
Stratos 2.70 m EURO	453	4511277
Stratos 2.70 m forklift attachment	383	4511273
Stratos 2.70 m Weidemann 36 mm (660 mm)	458	4511278
Stratos 2.70 m Schäffer 42 mm (660 mm)	459	4511279
Stratos 2.70 m Schäffer plate attachment	458	4511280
Stratos 2.70 m Weidemann plate attachment	458	4511281
Stratos 2.70 m pendulum/height adjustment without attachment	443	4511276
Hydraulic tilting Stratos <sup>1</sup>	13	4550050
Hydraulic collection pan operation (attachment kit) <sup>2</sup>	12	4550100
Third Stratos support wheel (attachment kit) <sup>3</sup>	20	4550400
Side sweeper right PPN Stratos 2.70 m <sup>2</sup>	28	4740260
Side sweeper right PPN/steel Stratos 2.70 m <sup>2</sup>	33	4740265
Brush set PPN/steel 2.70 m (surcharge)	18	4845095

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

<sup>1</sup> Only possible with three-point attachment. Cannot be combined with hydraulic collection pan operation when working at the rear.

<sup>2</sup> No additional control unit is required.

<sup>3</sup> Recommended for attachment to the front loader

<sup>4</sup> Mechanical tilting limited in use



Side sweeper PPN



When mounted in the front, a 3rd support wheel is recommended.

# STRATOS PROFI SWEEPING MACHINE

For use case video, see page 126



Optimised for front attachment to tractors, farmyard, wheel and telescopic loaders or forklifts

## As standard

- › 3 support wheels with 250 × 60 mm diameter made of PUR
- › Brush diameter 58 cm
- › Mechanical tilting by 20° on both sides
- › Large-volume collection pan with hydraulic emptying mechanism
- › Sweeping possible with open collection pan



## Optional

- › Side sweeper PPN or PPN/steel: right, left or both sides
- › Spraying device with 200 l water tank
- › Hydraulic tilting 20°
- › Super-elastic wheels 250 × 85 mm for a low-vibration, comfortable ride

Oil flow rate:

Minimum 30 l, maximum 60 l

Max. pressure 180 bar. If these values are exceeded, then a flow control valve must be fitted!

## Attachments

- › D-LOCK with a wide selection of bolt-on attachments (self-adjusting pendulum and height adjustment)
- › Forklift attachment (self-adjusting pendulum and height adjustment)
- › Three-point CAT I and CAT II with pendulum adjustment

**D-LOCK**  
Bolted attachments  
see page 120

The Stratos Profi sweeping machine is delivered fully assembled.

# STRATOS PROFI SWEEPING MACHINE



Mechanical tilting on both sides



Spraying device (optional)



Super-elastic wheel (optional)



Pendulum/height adjustment



Quick brush height adjustment



Transport position side sweeper



Side sweeper (optional)

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## STRATOS PROFI SWEEPING MACHINE

Designation	kg	Article no.
Stratos Profi 1.50 m D-LOCK	535	4815000
Stratos Profi 1.50 m 3-point CAT 1/CAT 2	505	4815010
Stratos Profi 1.50 m D-LOCK with forklift attachment	615	4815020
Side sweeper PPN right 1.50 m	35	4841150
Side sweeper PPN left 1.50 m	35	4843150
Side sweeper PPN/steel right 1.50 m	37	4842150
Side sweeper PPN/steel left 1.50 m	37	4844150
Hydraulic tilting	10	4845000
Electrical switching hydraulic tilting - sweeping <sup>1</sup>	5.5	4845030
Flow control valve incl. pressure relief valve Stratos Profi <sup>2</sup>	8.5	4845040
Super-elastic swivel castors 250x85 mm (surcharge)	23	4845020
LED limiting lights <sup>3</sup>	2.2	4845050
Spraying device 12 V 1.50 m (3-point/D-LOCK)	42	4845150
Spraying device 12 V 1.50 m (forklift attachment)	24	4847150
Spraying device 24 V 1.50 m (forklift attachment)	24	4846150
Brush set PPN/steel 1.50 m (surcharge)	6	4845075
Stratos Profi 1.80 m D-LOCK	560	4817000
Stratos Profi 1.80 m 3-point CAT 1/CAT 2	530	4817010
Stratos Profi 1.80 m D-LOCK with forklift attachment	640	4817020
Side sweeper PPN right 1.80 m	35	4841170
Side sweeper PPN left 1.80 m	35	4843170
Side sweeper PPN/steel right 1.80 m	37	4842170
Side sweeper PPN/steel left 1.80 m	37	4844170
Hydraulic tilting	10	4845000
Electrical switching hydraulic tilting - sweeping <sup>1</sup>	5.5	4845030
Flow control valve incl. pressure relief valve Stratos Profi <sup>2</sup>	8.5	4845040
Super-elastic swivel castors 250x85 mm (surcharge)	23	4845020
LED limiting lights <sup>3</sup>	2.2	4845050
Spraying device 12 V 1.80 m (3-point/D-LOCK)	42	4845170
Spraying device 12 V 1.80 m (forklift attachment)	24	4847170
Spraying device 24 V 1.80 m (forklift attachment)	24	4846170
Brush set PPN/steel 1.80 m (surcharge)	12	4845085

<sup>1</sup> Can only be used in combination with hydr. tilting to actuate swivelling and sweeping via a double-acting control unit.

<sup>2</sup> For carrier vehicles with hydraulic power above the maximum values specified.

<sup>3</sup> Mounting direction for use in the front

## STRATOS PROFI SWEEPING MACHINE

Designation	kg	Article no.
Stratos Profi 2.25 m D-LOCK	600	4822000
Stratos Profi 2.25 m 3-point CAT 1/CAT 2	570	4822510
Stratos Profi 2.25 m D-LOCK with forklift attachment	680	4822520
Side sweeper PPN right 2.25 m	35	4841225
Side sweeper PPN left 2.25 m	35	4843225
Side sweeper PPN/steel right 2.25 m	37	4842225
Side sweeper PPN/steel left 2.25 m	37	4844225
Hydraulic tilting	10	4845000
Electrical switching hydraulic tilting - sweeping <sup>1</sup>	5.5	4845030
Flow control valve incl. pressure relief valve Stratos Profi <sup>2</sup>	8.5	4845040
Super-elastic swivel castors 250x85 mm (surcharge)	23	4845020
LED limiting lights <sup>3</sup>	2.2	4845050
Spraying device 12 V 2.25 m (3-point/D-LOCK)	42	4845225
Spraying device 12 V 2.25 m (forklift attachment)	24	4847225
Spraying device 24 V 2.25 m (forklift attachment)	24	4846225
Brush set PPN/steel 2.25 m (surcharge)	14	4845090
Stratos Profi 2.70 m D-LOCK	640	4827000
Stratos Profi 2.70 m 3-point CAT 1/CAT 2	610	4827010
Stratos Profi 2.70 m D-LOCK with forklift attachment	720	4827020
Side sweeper PPN right 2.70 m	35	4841270
Side sweeper PPN left 2.70 m	35	4843270
Side sweeper PPN/steel right 2.70 m	37	4842270
Side sweeper PPN/steel left 2.70 m	37	4844270
Hydraulic tilting	10	4845000
Electrical switching hydraulic tilting - sweeping <sup>1</sup>	5.5	4845030
Flow control valve incl. pressure relief valve Stratos Profi <sup>2</sup>	8.5	4845040
Super-elastic swivel castors 250x85 mm (surcharge)	23	4845020
LED limiting lights <sup>3</sup>	2.2	4845050
Spraying device 12 V 2.70 m (3-point/D-LOCK)	42	4845270
Spraying device 12 V 2.70 m (forklift attachment)	24	4847270
Spraying device 24 V 2.70 m (forklift attachment)	24	4846270
Brush set PPN/steel 2.70 m (surcharge)	18	4845095

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

<sup>1</sup> Can only be used in combination with hydr. tilting to actuate swivelling and sweeping via a double-acting control unit.

<sup>2</sup> For carrier vehicles with hydraulic power above the maximum values specified.

<sup>3</sup> Mounting direction for use in the front

## ACCESSORIES FOR STRATOS SWEEPING MACHINES



Brushes PPN



Brushes PPN/steel



Disc brushes PPN



Disc brushes PPN/steel

Designation	kg	Article no.
Brush 58 cm diameter, 75 cm long, PPN	12	45110757
Brush 58 cm diameter, 90 cm long, PPN	15	45100900
Brush 58 cm diameter, 75 cm long, PPN/steel	16	45111758
Brush 58 cm diameter, 90 cm long, PPN/steel	19	45111958
Disc brush 600 mm PPN	5	47106355
Disc brush 600 mm PPN/steel	6	47106350

➤ Brushes with 52 cm diameter are available on request.

# WEED SWEEPER



Steel bristles



PPN bristles



Plastic-coated steel bristles

Versatile, stable and customisable. The even contact pressure and excellent ground adaptation capability when using a farmyard or wheel loader makes the new weed sweeper from düvelsdorf an impressive piece of equipment.

- D-LOCK attachment: Compatible with almost any carrier vehicle
- Swivelling range up to 400 mm, adjustable via a hole pattern in 5 positions
- Spring-loaded contour driving at the kerb possible over the entire swivelling range
- Suspension in parallelogram for quiet, effective work
- Adjustable to the width of the carrier vehicle from 1.2 m - 2.7 m thanks to bolted frame
- PPN, steel or steel-coated bristles available
- Individually bolted bristles for effortless replacement

Designation	kg	Article no.
Weed sweeper W20 D-LOCK PPN	172	2822300
Weed sweeper W20 D-LOCK steel	182	2822310
Weed sweeper W20 D-LOCK steel coated	182	2822320
Weed sweeper W30 D-LOCK PPN	175	2822400
Weed sweeper W30 D-LOCK steel	190	2822410
Weed sweeper W30 D-LOCK steel coated	190	2822420
Swivel castor 160 × 50 for height guidance	6.5	2822590
PPN bristles	0.25	2822140
Steel bristles	0.7	2822130
Steel-coated bristles	0.7	2822135

Note: the hydraulic hose set and bristles require assembly. Assembly time: approx. 1 hour.

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## HEDGE TRIMMER MC190



For use case video, see page 126

The MC190 hedge trimmer was developed in co-operation with GROUP SCHUMACHER - it's powerful, flexible and makes a precise cut. Sophisticated technology, ideal for municipal and agricultural use or in landscaping.

### AT A GLANCE:

- Specially developed for mounting the KM-X, KM-S and KM-L shear heads
- D-LOCK system for mounting a wide range of carrier vehicles
- Toolless reach adjustment via parallelogram
- Collision protection as standard
- Hose routing protected in the frame
- Integrated angle display for maximum precision

A collaboration by



+



## HEDGE TRIMMER MC190 | IN DETAIL



Hose routing protected in frame



Integrated angle display for maximum precision



D-LOCK system for mounting a wide range of carrier vehicles



Balancing weights can be added individually as required

### ADVANTAGES:

- The hydraulic lines, which are protected in the frame, and the flat arrangement of the hydraulic cylinder ensure that falling clippings do not cause any damage to the hydraulic components.
- The parking supports ensure that the dismantled carrier system is stable. For an additional benefit, they are mounted on the device in an "overhead" working position and thus create a holder for the blade guard so that all accessories can be carried along.

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

# HEDGE TRIMMER MC190

## TECHNICAL DATA

<b>Reach from centre of attachment:</b>	875 mm - 1930 mm
<b>Triggering force collision protection:</b>	Up to 100 kg (collision protection is adjustable)
<b>Swivelling range of the shears:</b>	-10 degrees to + 100 degrees
<b>Oil flow rate:</b>	10 - 60 l/min. (depending on the shear head)
<b>Max. working pressure:</b>	180 bar
<b>Hydraulic connections:</b>	<p><b>As standard:</b> 2 double-acting connections (1 x drive* + 1 x inclination)</p> <p><b>Optional:</b> 1 double-acting connection* (electrical switching drive/inclination)</p> <p><b>For hyd. adjustment of the reach:</b> 2 double-acting connections (1 x drive* + 1 x inclination/reach)</p> <p>*max. return flow pressure 80 bar</p>
<b>Weight (without shear head):</b>	approx. 188 kg
<b>Balancing weight:</b>	50 - 130 kg
<b>Attachments:</b>	Individual attachments
<b>Possible shear heads:</b>	KM 165-L, KM 150-S, KM 180-S, KM 170-X

## OVERVIEW OF SHEAR HEADS AVAILABLE



### KM-L

- Branches and small twigs up to max. Ø 20 mm
- Working width: 1.65 m
- Weight: 46 kg
- Oil volume: 10 - 20 l/min.

# HEDGE TRIMMER MC190

## OVERVIEW OF SHEAR HEADS AVAILABLE



### KM-S

- High stability for branches up to Ø 30 mm
- Working width: 1.50 m, 1.80 m
- Weight: 65 kg, 72 kg
- Oil volume: 15 - 30 l/min.



### KM-X

- Very high stability for branches up to Ø 60 mm
- Working width: 1.70 m
- Weight: 111 kg
- Oil volume: 40 - 50 l/min.

Designation	kg	Article no.
Hedge trimmer MC190 D-LOCK with KM 165 L right	231	2831116
Hedge trimmer MC190 D-LOCK with KM 150-S right	250	2831215
Hedge trimmer MC190 D-LOCK with KM 180-S right	257	2831218
Hedge trimmer MC190 D-LOCK with KM 170-X right	296	2831317
Hedge trimmer MC190 D-LOCK with KM 165 L left	231	2831116
Hedge trimmer MC190 D-LOCK with KM 150-S left	250	2831215
Hedge trimmer MC190 D-LOCK with KM 180-S left	257	2831218
Hedge trimmer MC190 D-LOCK with KM 170-X left	296	2831317
Additional weight (49 kg)	49	2830200
Additional weight extension (max. 3 pieces at 26 kg)	26	2830205
Electric switching drive - inclination (surcharge)	2.5	2830310
Hydraulic side shift adjustment		
Inclination- reach (incl. switching valve) (surcharge)	10.5	2830320
Flow control valve incl. pressure relief valve	7.5	2830300
Hedge trimmer MS03 Simlock KM-X 170 (without connection lines for the hydraulic motor)	132	2838317
Blade set KM-X 5 pieces <sup>1</sup>	1.25	2839355
Blade set KM-X 15 pieces <sup>1</sup>	2.5	2839360
Wear part set KM-X (2 double fingers and 5 blades)	1	2839350

Note: articles 2830310 and 2830320 cannot be combined.

<sup>1</sup> Includes bolts and nuts for fixing.

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## WORK PLATFORM EURO



- For Euro attachments
- With wooden protection strip on the handrail
- With tool tray
- EC type approval
- Self-closing door
- Circular spirit level for indication of angled position
- Load capacity 250 kg

### Optional

- Elevation by 1.00 m

Before commissioning, the combination (work platform, front loader, tractor) must be approved. The inspection is subject to a fee.

Designation	kg	Article no.
Work platform 1.10 m, internal dimensions: 1040 x 790 x 1100 mm	180	3523050
Elevation for work platform 1.10 m (sale, while stocks last)	95	3523055
Work platform 1.60 m, internal dimensions: 1540 x 790 x 1100 mm	245	3523100
Elevation for work platform 1.60 m (sale, while stocks last)	110	3523105

# GALVANISED WORK PLATFORM

EC type approval



Sweepers

Work platforms

- Width: 1.10 m/1.60 m
- Attachment: EURO, D-LOCK and forklift
- Permanently integrated 1 m elevation
- Generous side entry
- Self-closing door
- Load capacity 250 kg
- Non-slip chequer plate base made from aluminium

Before commissioning, the combination (work platform, front loader, tractor) must be approved. The inspection is subject to a fee.

Buckets/Forks

## Optional

- Toolbox
- Plastic cut protection strip (necessary for use with chainsaws)
- Set of 4 swivel castors



Bale/Load transport

Designation	kg	Article no.
Elevated galvanised work platform 1.10 m wide	195	3523125
Elevated galvanised work platform 1.10 m wide D-LOCKS	208	3523110
Elevated galvanised work platform 1.60 m wide	230	3523135
Elevated galvanised work platform 1.60 m wide D-LOCK	237	3523115
Cut protection strips 1.10 m wide	4.50	3523141
Cut protection strips 1.60 m wide	5	3523142
Tool tray	8	3523140
Set of 4 swivel castors 150 mm	6.50	210500
Accessory set for EC type examination*	0.5	3523150

\* Additional cut protection strips are required when using chainsaws.

Fodder clearing machine

## MANURE FORK WITH PAWL ATTACHMENT



Manure fork for front loader with pawl attachment. Sturdy spring steel tines, 800 mm long.

- Sturdy design
- Available in 3 sizes
- Also available in a wider version (1.40 m)
- Spring steel tines (800 mm long)
- Pawl hook available for STOLL loader

Designation	kg	Article no.
Manure fork size 2 pawl attachment 0.80 m, 5 tines	76	3519520
Manure fork size 3 pawl attachment 1.00 m, 6 tines	86	3519530
Manure fork size 3 pawl attachment 1.40 m, 8 tines	107	3519540
Tine for front loader 800 mm, each	4	3519800
Long pawl hook for STOLL loader (available for all sizes)	2	3519531

## SOIL BUCKET WITH PAWL ATTACHMENT



Soil bucket for front loader with pawl attachment

- Sturdy design
- Available in 3 sizes
- Pawl hook available for STOLL loader

Designation	kg	Article no.
Soil bucket size 2 pawl attachment 0.80 m, 0.2 m <sup>3</sup>	90	3519002
Soil bucket size 3 pawl attachment 1.00 m, 0.25 m <sup>3</sup>	102	3519003
Soil bucket size 2/3 pawl attachment 1.80 m, 0.4 m <sup>3</sup>	193	3519008
Long pawl hook for STOLL loader (available for all sizes)	2	3519531

# LIGHT GOODS BUCKET EURO



Individually welded attachments to order - see page 118

### Dimensions:

- Height inside: 530 mm, outside: 655 mm
- Depth inside: 740 mm, outside: 805 mm
- At height 1.20 m: 1 x middle bar
- Up to size 1.40 m: 2 x middle bar
- Scrape rail
- Lateral reinforcing beads
- Forged hook

Designation	kg	Article no.
Light goods bucket 1.20 m EURO, 0.28 m <sup>3</sup>	112	3312120
Light goods bucket 1.40 m EURO, 0.34 m <sup>3</sup>	124	3312140
Light goods bucket 1.60 m EURO, 0.38 m <sup>3</sup>	144	3312160
Light goods bucket 1.80 m EURO, 0.43 m <sup>3</sup>	152	3312180
Light goods bucket 2.00 m EURO, 0.48 m <sup>3</sup>	163	3312200
Light goods bucket 2.20 m EURO, 0.53 m <sup>3</sup>	180	3312220

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## SOIL BUCKET EURO



Individually welded attachments  
to order - see page 118

Dimensions:

- Height inside: 640 mm, outside: 735 mm
- Depth inside: 890 mm, outside: 980 mm
  
- Conical construction
- Forged hook
- Scrape rail
- Lateral reinforcing beads
- Thickness: 5 mm

Designation	kg	Article no.
Soil bucket 1.20 m EURO, 0.4 m <sup>3</sup> , no middle bar	183	3315120
Soil bucket 1.40 m EURO, 0.5 m <sup>3</sup> , no middle bar	200	3315140
Soil bucket 1.60 m EURO, 0.6 m <sup>3</sup> , no middle bar	213	3315160
Soil bucket 1.80 m EURO, 0.7 m <sup>3</sup> , no middle bar	230	3315180
Soil bucket 2.00 m EURO, 0.8 m <sup>3</sup> , no middle bar	247	3315200
Soil bucket 2.20 m EURO, 0.9 m <sup>3</sup> , two middle bars	282	3315220
Soil bucket 2.40 m EURO, 1.0 m <sup>3</sup> , two middle bars	312	3315240
Soil bucket 2.60 m EURO, 1.1 m <sup>3</sup> , two middle bars	326	3315260

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

## BULK MATERIAL BUCKET EURO



- Robust construction
- EURO attachment
- Dimensions:
  - Height inside: 820 mm, outside: 935 mm
  - Depth inside: 1150 mm, outside: 1212 mm
- Scrape rail
- Thickness: 5 mm

Individually welded attachments to order - see page 118

Designation	kg	Article no.
Bulk material bucket 2.00 m EURO, 1.60 m <sup>3</sup>	404	3520200
Bulk material bucket 2.30 m EURO, 1.85 m <sup>3</sup>	433	3520230

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

## MANURE FORK EURO

Continuous cone sleeves



Cone sleeves welded into the frame

Sturdy manure fork for front loader with EURO attachment and robust spring steel tines, each 800 mm long.

- EURO attachment
- Available with 8, 10, 12 or 14 tines
- Wear rail

Designation	kg	Article no.
Manure fork EURO 1.37 m, 8 tines	130	3519037
Manure fork EURO 1.73 m, 10 tines	152	3519073
Manure fork EURO 2.10 m, 12 tines with middle bar	178	3519121
Manure fork EURO 2.47 m, 14 tines with middle bar	183	3519140
Tine for front loader 800 mm, each	4	3519800

Note: delivered unassembled. Assembly time: approx. 30 minutes

## MANURE AND SILAGE FORK EURO



Continuous cone sleeves

Individually welded attachments to order - see page 118

Practical manure and silage fork with pallet thumb equipped with tines.

With two double-acting hydraulic cylinders, the tongs grip powerfully. This ensures that the goods to be transported remain safely on the fork.

All tines are replaceable.

- EURO attachment
- Robust steel construction
- Wear rail
- Tine length: 800 mm
- Tines with anti-twist feature

**Note:** a pressure relief valve is required for hydraulic pressure above 180 bar.



Designation	kg	Article no.
Manure and silage fork 1.20 m EURO, 2 x 6 tines	215	3519544
Manure and silage fork 1.40 m EURO, 2 x 7 tines	235	3519545
Manure and silage fork 1.60 m EURO, 2 x 8 tines	255	3519546
Manure and silage fork 1.80 m EURO, 2 x 9 tines	275	3519560
Manure and silage fork 2.00 m EURO, 2 x 10 tines	300	3519580
Manure and silage fork 2.20 m EURO, 2 x 11 tines	330	3519582
Manure and silage fork 2.40 m EURO, 2 x 12 tines	355	3519584
Pressure relief valve, unmounted	1	3517960

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

Note: delivered unassembled. Assembly time: approx. 1.5 hours.

# MANURE BUCKET EURO



Individually welded attachments to order - see page 118

The manure bucket is designed for removing and loading manure. It is suitable for front loaders with EURO attachment. The removable side pockets, which make it easier to remove the manure, are a particular highlight.

- EURO attachment
- Bucket: 1.80 m and 2.00 m
- Removable side pockets
- Number of tines: 9 or 10 tines
- Scrape rail
- 2 hydraulic cylinders
- 1 double-acting connection required
- Large opening width: 1.45 m
- Removal from the wall is possible with the gripper fully open

- Dimensions:
- Bucket height: 600 mm
  - Bucket depth: 850 mm
  - Device height compl. closed: 900 mm



Designation	kg	Article no.
Manure bucket 1.80 m EURO, 0.7 m <sup>3</sup> , 8 tines	376	3525180
Manure bucket 2.00 m EURO, 0.8 m <sup>3</sup> , 9 tines	414	3525200
Pressure relief valve, unmounted	1	3517960

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

# POWER GRAB SHOVEL BUCKET EURO

For use case video, see page 126



Individually welded attachments to order - see page 118

- 2 hydraulic cylinders
- Robust bucket substructure
- Large opening width: 1.50 m
- Removable side pockets
- Removal from the wall is possible with the gripper fully open
- EURO attachment
- Scrape rail (16 mm)
- Sturdy gripping tines

Dimensions:

- Bucket height: 630 mm
- Bucket depth: 860 mm
- Device height compl. closed: 930 mm



Please note

**Mounting 1.60 m power grab shovel bucket only possible with hydraulic or central locking mechanism for the EURO attachment on the front loader.**  
A pressure relief valve is required for hydraulic pressure above 180 bar.

Designation	kg	Article no.
Power grab shovel bucket 1.60 m EURO, 0.75 m <sup>3</sup>	450	3522160
Power grab shovel bucket 1.80 m EURO, 0.85 m <sup>3</sup>	470	3522180
Power grab shovel bucket 2.00 m EURO, 0.95 m <sup>3</sup>	500	3522200
Power grab shovel bucket 2.20 m EURO, 1.05 m <sup>3</sup>	525	3522220
Pressure relief valve, unmounted	1	3517960

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

## POWER GRAB SHOVEL BUCKET COMPACT



- Bucket height: 495 mm
- Bucket depth: 455 mm
- Device height compl. closed: 650 mm
- Opening width: 760 mm

- EURO attachment
- 1 double-acting connection
- Max. 180 bar

Individually welded attachments to order - see page 118

Designation	kg	Article no.
Power grab shovel bucket compact 1.20 m, 6 tines, 0.25 m <sup>3</sup>	115	3529120
Power grab shovel bucket compact 1.40 m, 7 tines, 0.30 m <sup>3</sup>	126	3529140
Power grab shovel bucket compact 1.60 m, 8 tines, 0.34 m <sup>3</sup>	154	3529160
Power grab shovel bucket compact 1.80 m, 9 tines, 0.38 m <sup>3</sup>	165	3529180

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

## LIGHT GOODS BUCKET COMPACT



- Bucket height: 495 mm
- Bucket depth: 455 mm
- EURO attachment

Designation	kg	Article no.
Light goods bucket compact 1.20 m, 0.12 m <sup>3</sup>	69	3311120
Light goods bucket compact 1.40 m, 0.14 m <sup>3</sup>	77	3311140
Light goods bucket compact 1.60 m, 0.16 m <sup>3</sup>	86	3311160
Light goods bucket compact 1.80 m, 0.18 m <sup>3</sup>	94	3311180

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## SOIL BUCKET FOR FARMYARD LOADER



Individually welded attachments  
to order - see page 118

- Robust construction
- Weidemann and Schäffer attachments
- Width 1.00 - 1.20 m
- Versatile use
- Scrape rail

Dimensions:

- Height inside 630 mm, outside 737 mm
- Depth inside 900 mm, outside 980 mm

Designation	kg	Article no.
Soil bucket 1.00 m Weidemann 36 mm (660 mm) 0.3 m <sup>3</sup>	172	3210020
Soil bucket 1.20 m Weidemann 36 mm (660 mm) 0.4 m <sup>3</sup>	205	3210120
Soil bucket 1.00 m Weidemann plate attachment <sup>1</sup> 0.3 m <sup>3</sup>	163	3210025
Soil bucket 1.20 m Weidemann plate attachment <sup>1</sup> 0.4 m <sup>3</sup>	196	3210125
Soil bucket 1.00 m Schäffer 42 mm (660 mm) 0.3 m <sup>3</sup>	175	3210040
Soil bucket 1.20 m Schäffer 42 mm (660 mm) 0.4 m <sup>3</sup>	208	3210140
Soil bucket 1.00 m Schäffer 34 mm (650 mm) 0.3 m <sup>3</sup>	168	3210045
Soil bucket 1.20 m Schäffer 34 mm (650 mm) 0.4 m <sup>3</sup>	201	3210145
Soil bucket 1.00 m Schäffer plate attachment 0.3 m <sup>3</sup>	169	3210060
Soil bucket 1.20 m Schäffer plate attachment 0.4 m <sup>3</sup>	202	3210160

<sup>1</sup>Attention: lower locking strap is enclosed loose!

## LIGHT GOODS BUCKET FOR FARMYARD LOADER



Individually welded attachments  
to order - see page 118

- Weidemann and Schäffer attachments
- Width 1.00 - 1.20 m
- Scrape rail

Dimensions:

- Height inside: 530 mm, outside: 660 mm
- Depth inside: 740 mm, outside: 760 mm

Designation	kg	Article no.
Light goods bucket 1.00 m Weidemann 36 mm (660 mm) 0.23 m <sup>3</sup>	115	3211020
Light goods bucket 1.20 m Weidemann 36 mm (660 mm) 0.28 m <sup>3</sup>	125	3211120
Light goods bucket 1.00 m Weidemann plate attachment <sup>1</sup> 0.23 m <sup>3</sup>	110	3211025
Light goods bucket 1.20 m Weidemann plate attachment <sup>1</sup> 0.28 m <sup>3</sup>	123	3211125
Light goods bucket 1.00 m Schäffer 42 mm (660 mm) 0.23 m <sup>3</sup>	116	3211040
Light goods bucket 1.20 m Schäffer 42 mm (660 mm) 0.28 m <sup>3</sup>	130	3211140
Light goods bucket 1.00 m Schäffer 34 mm (650 mm) 0.23 m <sup>3</sup>	110	3211045
Light goods bucket 1.20 m Schäffer 34 mm (650 mm) 0.28 m <sup>3</sup>	120	3211145
Light goods bucket 1.00 m Schäffer plate attachment 0.23 m <sup>3</sup>	125	3211060
Light goods bucket 1.20 m Schäffer plate attachment 0.28 m <sup>3</sup>	137	3211160

<sup>1</sup>Attention: lower locking strap is enclosed loose!

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## FORK-AND-GRAB FOR FARMYARD LOADER



- Weidemann and Schäffer attachments
- Width 1.00 - 1.20 m
- 1 hydraulic cylinder
- 1 double-acting connection required
- Height: 845 mm | Opening width: 1000 mm
- Volume: 1.00 m: 0.42 m<sup>3</sup>  
1.20 m: 0.50 m<sup>3</sup>
- 1.00 m with 6 tines | 1.20 m with 8 tines

**Note:** a pressure relief valve is required for hydraulic pressure above 180 bar.

Designation	kg	Article no.
Fork-and-grab 1.00 m Weidemann 36 mm (660 mm)	146	3230020
Fork-and-grab 1.20 m Weidemann 36 mm (660 mm)	166	3230120
Fork-and-grab 1.00 m Weidemann plate attachment <sup>1</sup>	137	3230025
Fork-and-grab 1.20 m Weidemann plate attachment <sup>1</sup>	157	3230125
Fork-and-grab 1.00 m Schäffer 42 mm (660 mm)	149	3230040
Fork-and-grab 1.20 m Schäffer 42 mm (660 mm)	169	3230140
Fork-and-grab 1.00 m Schäffer 34 mm (650 mm)	142	3230045
Fork-and-grab 1.20 m Schäffer 34 mm (650 mm)	162	3230145
Fork-and-grab 1.00 m Schäffer plate attachment	143	3230060
Fork-and-grab 1.20 m Schäffer plate attachment	163	3230160
Fork-and-grab 1.20 m EURO	167	3230150
Pressure relief valve, unmounted	1	3517960

Other individually welded attachments available on request (e.g. Volvo, Bobcat,...)

Note: delivered unassembled. Final assembly approx. 30 minutes

<sup>1</sup>Attention: lower locking strap is enclosed loose!

## ROUND BALE GRIPPER



Individually welded attachments  
to order - see page 118

- Arms move freely to the sides for working without causing any damage
- Bales put down horizontally or upright
- For bales from 1000 mm to 1600 mm
- Opening depth 1000 mm, height 800 mm
- Supplied with hydraulic hoses
- Suitable for bales up to 1200 kg

**Note:** a pressure relief valve is required for hydraulic pressure above 180 bar.

Designation	kg	Article no.
Round bale gripper EURO	215	3517800
Round bale gripper Weidemann 36 mm (660 mm)	220	3517850
Pressure relief valve round bale gripper, unmounted	1	3517950

Individually welded attachments available on request (e.g. Schäffer, Volvo, Bobcat,...)

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## ROUND BALE FORK SOLO MECHANICAL



The round bale fork solo can be used universally with the EURO and CAT 2 attachment. The freely movable arms can be used to pick up round bales with a diameter of 0.80 m to 1.30 m without having to adjust the arms. There is an option for the round bale fork to be equipped with a cylinder which can be used to hydraulically set the arms to the bale size. The film may get damaged when picking up wrapped bales larger than 1.30 metres.

### Advantages

- EURO/CAT 2
- Bale size: 0.80 – 1.80 m
- Load capacity: approx. 700 kg
- Use in front loader possible even without third control circuit
- Picks up bales quickly and easily
- No need to adjust the arms

Designation	kg	Article no.
Round bale fork solo mechanical	110	3517740

Note: delivered unassembled. Final assembly approx. 30 minutes

## ROUND BALE FORK SOLO HYDRAULIC



Designation	kg	Article no.
Round bale fork solo hydraulic	120	3517745

Note: delivered unassembled. Final assembly approx. 30 minutes

## ROUND BALE FORK COMBI



The round bale fork Combi can be used by different carrier vehicles thanks to its EURO and 3-point hitch.

- Load capacity approx. 600 kg
- 3-point attachment CAT 2 and EURO
- Stable tubular steel frame

Designation	kg	Article no.
Round bale fork Combi	100	3517785

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## ROUND BALE FORK, 3-POINT



- For 3-point attachment
- Sturdy tubular steel frame
- Angled tips for easy bale pick-up
- Load capacity approx. 600 kg
- 3-point attachment CAT 1 and CAT 2
- Bale size 0.80 - 1.30m

Designation	kg	Article no.
Round bale fork 3-point	74	3517780

## ROUND BALE FORK DUO

The round bale fork DUO is ideal for efficiently transporting 2 round bales. Versatile use with EURO and 3-point is made possible thanks to the combination attachment.



- Load capacity 2 x 700 kg
- 3-point attachment CAT 2, EURO
- Opening width per side from 650 to 1000 mm

Dimensions:

- Length: 1250 mm
- Width: 2100 mm

Designation	kg	Article no.
Round bale fork DUO	165	3517750

## BALE TRANSPORT FORKS



### Bale transport fork 3-point hinged

- › Hinged tines
- › For 3-point attachment and triangle hitch
- › Sturdy frame in U-profile
- › With 2 tines to pick up bales quickly and securely
- › Load capacity 500 kg
- › 3-point attachment CAT 2
- › Tines 1100 mm

Designation	kg	Article no.
Bale transport fork 3-point hinged	43	3517620



### Bale transport fork 3-point

- › For 3-point attachment and triangle hitch
- › Sturdy frame in U-profile
- › With 2 tines to pick up bales quickly and securely
- › Load capacity 500 kg
- › 3-point attachment CAT 2
- › Tines 1100 mm

Designation	kg	Article no.
Bale transport fork 3-point	37	3517610

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## BALE TRANSPORT FORKS



- With 2 or 4 tines to pick up bales quickly and securely
- Tines 1100 mm
- Height 0.6 m
- Bale transport fork 1.20 m load capacity: 500 kg
- Bale transport fork 1.90 m load capacity: 1000 kg

Designation	kg	Article no.
Bale transport fork 1.20 m EURO, 2 tines (3rd tine optional)	62	3517625
Bar bale transport fork 1.20 m	12	3517644
Bale transport fork 1.90 m EURO, 4 tines	120	3517650
Bar bale transport fork 1.90 m	19	3517645
Tine for front loader 1100 mm, each	6	3519801

## BALE TRANSPORT FORK, HYDRAULIC EURO



Both the tines and the bar can be folded up quickly and easily using two hydraulic cylinders. This achieves a compact transport position and ensures safe road travel.

- Height opened out: 2295 mm, folded up: 1430 mm
- Length opened out: 1280 mm, folded up: 400 mm
- Width: 1850 mm

Individually welded attachments to order - see page 118

- Tines and bar can be folded up (compact transport position)
- Transport of up to 4 bales
- Load capacity: 1500 kg
- 3 x heavy-duty tines 1100 mm, 45 mm diameter
- Hydraulic system: 1 x double-acting (30 l/min flow rate)

### Optional

- 2 x tines for front loader 1100 mm

Note: a pressure relief valve is required for hydraulic pressure above 180 bar.

For use case video, see page 126



Designation	kg	Article no.
Hydraulic bale transport fork EURO	310	3517760
Pressure relief valve	1	3517960
Tine for front loader 1100 mm, each	6	3519801

Individually welded attachments available on request (e.g. Schäffer, Volvo, Bobcat,...)

Note: delivered unassembled. Final assembly approx. 1 hour.

# BALE CUTTING BUCKET



Film gripper



Individually bolted blades



Maximum bale diameter: 2 m

## BALE CUTTING BUCKET



- › Hardened blades to effortlessly cut film, netting and the bales themselves
- › Film gripper holds net and film for clean separation of fodder and wrapping
- › Individual blades can be replaced quickly and easily
- › Suitable for removing fodder from silage piles
- › Can be optionally equipped with a hard-wearing Hardox interchangeable cutter for screwing on, for even greater durability in tough conditions.
- › Width: 2.11 m
- › Load capacity: 1,400 kg
- › Maximum bale diameter: 2 m
- › Maximum bale width: 1.6 m
- › Maximum cutting force: approx. 8.6 tonnes
- › Maximum working pressure: 190 bar
- › Hydraulics 1 × double-acting
- › Bucket volume (water): 1.32 m<sup>3</sup>

Individually welded attachments  
to order - see page 118

Designation	kg	Article no.
Bale cutting bucket	895	3528120
Hardox interchangeable cutter for screwing on	52	3528105
Pressure relief valve	1	3528115

Individually welded attachments available on request (e.g. Schäffer, Volvo, Bobcat,...)

## PALLET FORK EURO



Individually welded attachments  
to order - see page 118

- EURO attachment
- 2.5 t fork support ISO FEM II
- Clear view through fork support
- Tine length 1200 mm
- Tine cross-section 100 x 40 mm
- Load capacity: 2500 kg with 600 mm load centre

A practical aid for transporting pallets. The forged fork tines can be individually adjusted on the 1.25 m wide fork support.



### Optional accessories (from left to right)

- Push-on tubes for tine profile 100 x 40 cm
- Pallet fork tines
- Bale carrier for fork support FEM II, **ISO** (load capacity 600 kg per pair)
- Tine holder for pallet fork (load capacity 500 kg per pair)

Designation	kg	Article no.
Pallet fork 2.5 t EURO, ISO FEM, II	174	3516400
Pallet fork carriage 2.5 t ISO FEM II	75	3516401
Tine holder pallet fork ISO FEM II, each (without tines)	12	3516150
Tines for front loader 1100 mm, each	6	3519801
Bale carrier (set) ISO FEM II	47	3516160
Push-on tubes (2 pcs)	32	3516170
Pallet fork tine 2.5 t (100 x 40 x 1200 mm) ISO FEM II, per piece	50	3515125
Pallet fork 2.5 t EURO three-point KAT II	216	3516410

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

## PALLET FORKS



Pallet fork 1.5 t EURO



Pallet fork 1.5 t Weidemann

Designation	kg	Article no.
Pallet fork 1.5 t EURO, ISO FEM, II	128	3516300
Pallet fork 1.5 t Weidemann 36 mm (660 mm) ISO FEM II	141	3516310
Pallet fork tine 1.5 t (80 x 40 x 1200 mm) ISO FEM II, per piece	38.5	3515120



Pallet fork 700 kg EURO



Pallet fork 700 kg Skid Steer

- EURO attachments, Skid Steer, Three-point CAT 1/2
- Load capacity 700 kg (400 mm load centre)
- Tine spacing 250 - 925 mm (outside)
- Clear view through frame
- Tine positions locked
- Tines folded up in transport position and locked
- Tine length 800 mm
- Tine cross-section 75 x 40 mm
- Reinforced tine tip



Pallet fork 700 kg three-point CAT I/CAT II

Designation	kg	Article no.
Pallet fork 700 kg EURO	55	3516510
Pallet fork 700 kg Skid Steer	54	3516520
Pallet fork 700 kg three-point CAT I/CAT II	70	3516530

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## THUMB FOR PALLET FORK



The thumb is used as an accessory for the pallet fork with FEM II ISO or DIN attachment and is used for loading logs.

It is also possible to handle light wood and shrub wood as well as to clamp various objects on the fork tines.



- Weight: 68 kg
- Opening width 1300 mm
- Clamping diameter min. 300 mm
- 1 x double-acting connection required
- Approx. 2000 kg closing force
- Max. 180 bar

Designation	kg	Article no.
Thumb for pallet fork ISO FEM II	68	3516200
Thumb for pallet fork DIN FEM II	68	3516210

## CRATE ROTATING DEVICES



Illustration shows optional extra equipment

- ▶ Crate rotating device 1000 mm
- ▶ Structure: FEM II ISO standard
- ▶ Fork support width 1000 mm
- ▶ External width 1050 mm (without side arm)
- ▶ Rotation range 180° (anti-clockwise rotation)
- ▶ Load capacity 2500 kg
- ▶ Bolted gear ring
- ▶ Locking positions for pallet fork tines
- ▶ Rotary movement with double-acting hydraulic cylinder
- ▶ Hydraulic hoses with connector
- ▶ Optional: side arm (1.2 m crate width)

(pallet fork tines not included in delivery)

Designation	kg	Article no.
Crate rotating device ISO FEM II, 1000 mm	220	3524480
Side arm crate rotating device ISO FEM II 1000 mm	15	3524485
Crate rotating device ISO FEM II, 1200 mm	306	3524400
Crate rotating device ISO FEM III, 1200 mm	320	3524410
Hold-down device crate rotating device ISO FEM, 1200 mm	30	3524420
Adapter frame crate rotating device ISO FEM II (for individually welded attachments, e.g. EURO, Weidemann,...)	75	3524430
Pallet fork tine 2.5 t (100 x 40 x 1200 mm) ISO FEM II, per piece	50	3515125



Individually welded attachments to order - see page 118

Sweepers

Work platforms

Buckets/Forks

Bale/Load transport

Fodder clearing machine

## BIG BAG HOLDER EURO

The telescopic Big Bag holder has various adjustment options, making it suitable for nearly all Big Bags.

- EURO attachment
- Hook height 1300 - 1450 mm
- Width of the Big Bag attachment to the frame from 1150 - 1400 mm
- Weight: 111 kg
- Load capacity: 1200 kg
- Hook depth: 700 - 1000 mm



Designation	kg	Article no.
Big Bag holder EURO	111	3519250

## FODDER CLEARING MACHINE



Technical data:

- Clearing width: approx. 150 cm
- Driven over the ground
- Adjustment to the left and right
- A 16.9/34 tyre is recommended (not included in delivery)
- Galvanised

Designation	kg	Article no.
Fodder clearing machine 3-point mechanical	275	3618100
Fodder clearing machine combi mechanical	315	3618150
Hydraulic adjustment	14	3618050
Fodder clearing machine power grab shovel bucket attachment	200	3618200

# BOX SCRAPER

For use case video, see page 126



Extension 400 mm

The düvelsdorf box scraper is suitable for loosening and distributing bedding in stalls. The device can be coupled to the carrier vehicle using the EURO or D-LOCK attachment and can be swivelled into the working position using a double-acting control unit.

- Use of carrier vehicles with different widths possible due to flexible set-up
- Adjustment of the tines' engagement depth at two heights
- Adaptation to your cubicles and stalls
- Arm lengths: 990 mm - 1070 mm
- Arm lengths with an extension: 1360 mm - 1470 mm
- Arm lengths with two extensions: 1790 mm - 1890 mm
- Max. hydraulic pressure 180 bar
- Connections: 1 x double-acting

Designation	kg	Article no.
Box scraper EURO	210	3621100
Box scraper D-LOCK	185	3621110
Extension 400 mm	11.5	3621120

Note: delivered unassembled. Final assembly approx. 1 hour.

Box scraper

Rubber scrapers

Snow blades/ploughs

Transport boxes

Rear containers

## RUBBER SCRAPER EURO



Rubber scraper EURO

The rubber scraper is ideal for cleaning roads, squares and feeding alleys.

In winter it can also be used to clear snow.

The rubber edge adapts well to the ground and adjusts to uneven surfaces.

- Stable construction
- Hot-dip galvanised design
- Low-wear rubber strip with steel inlay
- Blade height 40 cm



Rubber strip with textile inlay



Rubber strip with steel inlay

Designation	kg	Article no.
Rubber scraper 1.50 m EURO steel inlay	64	3616150
Rubber scraper 2.00 m EURO steel inlay	78	3616200
Rubber scraper 2.60 m EURO steel inlay	93	3616260
Rubber scraper 1.50 m EURO textile inlay	69	3616155
Rubber scraper 2.00 m EURO textile inlay	81	3616205
Rubber scraper 2.60 m EURO textile inlay	86	3616265

### Rubber strip as spare part

Rubber strip 1.50 m steel inlay*	28	3615320
Rubber strip 2.00 m steel inlay*	40	3615310
Rubber strip 2.60 m steel inlay*	57	3615300
Rubber strip 1.50 m textile inlay	33	3615370
Rubber strip 2.00 m textile inlay	45	3615360
Rubber strip 2.60 m textile inlay	56	3615350

Rubber strip can be swapped from steel inlay to textile inlay

\*Secondary raw materials

## RUBBER SCRAPER D-LOCK



**D-LOCK**  
**Bolted attachments**  
 see page 120

Designation	kg	Article no.
Rubber scraper 1.50 m D-LOCK s steel inlay*	76	3616450
Rubber scraper 2.00 m D-LOCK steel inlay*	79	3616500
Rubber scraper 2.60 m D-LOCK steel inlay*	111	3616560
Rubber scraper 2.60 m D-LOCK textile inlay	104	3616565

\*Secondary raw materials

## RUBBER SCRAPER POWER GRAB SHOVEL BUCKET ATTACHMENT



Suitable for power grab shovel buckets with an edge max. 30 mm thick.

Designation	kg	Article no.
Rubber scraper 2.60 m power grab shovel bucket attachment*	185	3617490

\*Secondary raw materials

Box scraper

Rubber scrapers

Snow blades/ploughs

Transport boxes

Rear containers

## RUBBER SCRAPERS



3-point attachment CAT 2 and forklift, pockets for forklift: approx. 16 x 6 cm



EURO/forklift



Rubber scraper Weidemann 36 mm (660 mm)

Designation	kg	Article no.
Rubber scraper <sup>1</sup> 1.50 m Weidemann 36 mm (660 mm)	99	3615150
Rubber scraper <sup>1</sup> 2.00 m Weidemann 36 mm (660 mm)	122	3615200
Rubber scraper <sup>1</sup> 2.60 m Weidemann 36 mm (660 mm)	144	3615210
Rubber scraper <sup>1</sup> 2.60 m 3-point/forklift	180	3615250
Rubber scraper <sup>1</sup> 2.60 m EURO/forklift	190	3617460

<sup>1</sup> using secondary raw materials/rubber strip with steel inlay

## RUBBER SCRAPER 3.60 M COMBI



The rubber scraper 3.60 m Combi with EURO, forklift and three-point attachment CAT 2 is suitable for clearing paved surfaces.

The rubber scraper can be mechanically adjusted in three stages from 3.00 m - 3.60 m using the lateral elements, with the lateral elements having an angle of 55° - 20°.

The rubber strip with steel inlay is made up of three elements that overlap.

Designation	kg	Article no.
Rubber scraper 3.60 m COMBI COMBI steel inlay*	215	3617650

## RUBBER SCRAPER 3.60 M D-LOCK



with bolted Schäffer attachment

**D-LOCK**  
Bolted attachments  
see page 120

Designation	kg	Article no.
Rubber scraper 3.60 m D-LOCK steel inlay*	180	3617660

\*Secondary raw materials

Box scraper

Rubber scrapers

Snow blades/ploughs

Transport boxes

Rear containers

## RUBBER SCRAPER 3.00 M, PENDULUM-MOUNTED



The pendulum-mounted rubber scraper is suitable for clearing silo slabs, boulders and other surfaces. The pendulum joint ensures that it rests evenly on the ground, thus guaranteeing an optimal result. The wings, which protrude far forward, and the raised sheet metal ensure a high pushing volume.

- Working width: 3.00 m
- Pendulum range: +/- 5°
- Blade height: 660 mm
- Blade depth: 600 mm
- Attachment: EURO and CAT 2
- 45° cranked ends for collecting function
- Reel wheel can be mounted on both sides and in three positions (1 wheel included in delivery)

Designation	kg	Article no.
Rubber scraper <sup>1</sup> 3.00 m pendulum-mounted steel inlay*	290	3617600

<sup>1</sup> using secondary raw materials/rubber strip with steel inlay

## RUBBER SCRAPER 2.60 M COMBI



The rubber scraper Combi has a 3-way attachment. The combination of EURO, 3-point and forklift attachment is an ideal prerequisite for fast and efficient use with various carrier vehicles.

The standard hydraulic side adjustment ensures good drainage and the rubber scraper can be swivelled up to 30° to the right and left. The ends can be swivelled mechanically by approx. 45°.

Designation	kg	Article no.
Rubber scraper <sup>1</sup> 2.60 m COMBI steel inlay*	220	3617450

<sup>1</sup> using secondary raw materials/rubber strip with steel inlay

\*Secondary raw materials

## RUBBER SCRAPER WEIDEMANN/EURO, SWIVELLING



1.30 m, mechanically adjustable for Weidemann (hydraulic locking mechanism) or EURO.

Hydraulic adjustment is available as an option.

- Hot-dip galvanised frame
- Minimum clearing width = 110 cm
- Max. tilting = 30°
- 3-way adjustable

Designation	kg	Article no.
Rubber scraper <sup>1</sup> mechanical 1.30 m Weidemann 36 mm (660 mm) steel inlay*	120	3614150
Rubber scraper <sup>1</sup> mechanical 1.30 m EURO steel inlay*	120	3617420
Hydraulic adjustment	14	3618050

<sup>1</sup> using secondary raw materials/rubber strip with steel inlay

## RUBBER SCRAPER EURO MECHANICAL



2.60 m for EURO attachment with mechanical tilting. Ideal for cleaning feeding areas and putting out fodder. Hydraulic adjustment is available as an option.

- Hot-dip galvanised frame
- Minimum room width = 210 cm
- Max. tilting = 30°
- 3-way adjustable

Designation	kg	Article no.
Rubber scraper <sup>1</sup> mechanical 2.60 m EURO steel inlay	180	3617400
Hydraulic adjustment	14	3618050

<sup>1</sup> using secondary raw materials/rubber strip with steel inlay

\*Secondary raw materials

## RUBBER SCRAPER 70° SWIVELLING



- 2 x double-acting cylinder
- Max. titling 70°
- Ends can be inclined by 45°
- Combi attachment Euro, 3-point and forklift
- Ideal for pushing feed

Designation	kg	Article no.
Rubber scraper 2.60 m 70° with steel inlay*	275	3617550
Rubber scraper 2.60 m 70° with textile inlay	268	3617560

Note: delivered unassembled. Final assembly approx. 30 minutes  
<sup>1</sup> using secondary raw materials/rubber strip with steel inlay

## WEDGE-SHAPED RUBBER SCRAPER



The wedge-shaped rubber scraper is ideal for cleaning feeding areas and putting out fodder due to its acute angle.

- Rubber strip with steel inlay
- Hot-dip galvanised frame
- 1.50 m working width = 70° angle
- 2.50 m working width = 60° angle

1.5 m working width

Designation	kg	Article no.
Wedge-shaped rubber scraper <sup>1</sup> 1.50 m steel inlay	145	3617470
Wedge-shaped rubber scraper <sup>1</sup> 2.50 m steel inlay	275	3617480

<sup>1</sup> using secondary raw materials

\*Secondary raw materials

## PHOTOGRAPHS FROM PRODUCTION



Box scraper

Rubber scrapers



Snow blades/ploughs



Transport boxes

Rear containers

## MUNICIPAL SNOW BLADE



Further attachments on request  
(e.g. Hansa, etc.)

- Pendulum adjustment
- Blade height 60 cm
- Tilting 30°

Options:

- Hydr. tilting
- LED limiting lights
- Wheel set and skids



Illustration shows optional extra equipment

Designation	kg	Article no.
Municipal snow blade 1.5 m CAT 0/CAT 1	145	3721150
Municipal snow blade 1.8 m CAT 0/CAT 1	160	3721180
Municipal snow blade 2.0 m CAT 0/CAT 1	170	3721200
Municipal snow blade 2.2 m CAT 0/CAT 1	180	3721220
Municipal snow blade 1.5 m municipal triangle	124	3724150
Municipal snow blade 1.8 m municipal triangle	138	3724180
Municipal snow blade 2.0 m municipal triangle	146	3724200
Municipal snow blade 2.2 m municipal triangle	153	3724220
Municipal snow blade 1.5 m D-LOCK	155	3726150
Municipal snow blade 1.8 m D-LOCK	169	3726180
Municipal snow blade 2.0 m D-LOCK	177	3726200
Municipal snow blade 2.2 m D-LOCK	184	3726220
Hydraulic tilting municipal snow blade, (1 x double-acting)	15	3721400
LED limiting lights	4	3712297
Municipal snow blade wheel set (from 1.80 m), wheel size 160 x 50 mm	12	3720400
Municipal snow blade skids (from 1.80 m)	12	3720410

The snow blade is delivered fully assembled. Optional accessories are supplied unassembled.

# FORKLIFT SNOW BLADE



Box scraper

Rubber scrapers



- Forklift pockets 175 x 60 mm
- Tilting 30° mechanical
- Blade height 60 cm

Options:

- Hydr. tilting
- LED limiting lights
- Wheel set and skids

Snow blades/ploughs

Illustration shows optional extra equipment

Transport boxes

Designation	kg	Article no.
Forklift snow blade 1.50 m	140	3722150
Forklift snow blade 1.80 m	150	3722180
Forklift snow blade 2.00 m	160	3722200
Forklift snow blade 2.20 m	170	3722220
Hydraulic tilting forklift snow blade (1x double-acting)	15	3722400
LED limiting lights	4	3712297
Forklift snow blade wheel set (from 1.80 m), wheel size 160 x 50 mm	12	3720400
Forklift snow blade skids (from 1.80 m)	12	3720410

Rear containers

The snow blade is delivered partially assembled. Optional accessories are supplied unassembled.

## COMFORT SNOW BLADE



The snow blade with a working width of 2.00 m to 2.90 m is suitable for clearing paths and roads. The rubber strip prevents damage to the road surface.

The Comfort snow blade is equipped with a combination attachment for 3-point and EURO as a standard feature.

- Blade height: 80 cm
- Rubber strip: 50 mm thick (can also be replaced in parts)
- Standard 3-point attachment CAT 2 and EURO attachment
- Swivels approx. 30° sideways
- Holders for standard support wheels/skids (except snow blade DSK 2.00 m)

### Optional

- Hydraulic tilting with 2 cylinders, 1 x double-acting
- LED limiting lights
- Wheel set and skids



Skid



50 mm rubber strip and support wheel

Designation	kg	Article no.
Comfort snow blade 2.00 m	274	3712120
Comfort snow blade 2.20 m	296	3712210
Comfort snow blade 2.50 m	321	3712240
Comfort snow blade 2.90 m	351	3712280
Hydraulic tilting snow blade	22	3712296
LED limiting lights	4	3712297
Snow blade wheel set, wheel size 160 x 50 mm	15	3712299
Comfort snow blade skid kit	12	3712298

The snow blade is delivered fully assembled. Optional accessories are supplied unassembled.

## COMFORT SNOW BLADE WITH COLLISION PROTECTION



Box scraper

Rubber scrapers



Hydraulic tilting (optional)



Combination attachment



Spring-loaded rubber strip

Snow blades/ploughs

- Rubber strip with collision protection
- Combination attachment 3-point attachment CAT 2 and EURO
- Holders for standard support wheels/skids (except snow blade AFS 2.00 m)
- Minimum clearing width 20 cm smaller than blade width (by swivelling the snow blade)
- Swivels approx. 30° sideways
- Blade height 80 cm

### Optional

- Hydraulic tilting with 2 cylinders, 1 x double-acting
- LED limiting lights
- Wheel set and skids

Transport boxes

Designation	kg	Article no.
Comfort snow blade AFS (with collision protection) 2.00 m	325	3713190
Comfort snow blade AFS (with collision protection) 2.20 m	350	3713220
Comfort snow blade AFS (with collision protection) 2.50 m	382	3713250
Comfort snow blade AFS (with collision protection) 2.90 m	415	3713290
Hydraulic tilting snow blade	22	3712296
LED limiting lights	4	3712297
Snow blade wheel set, wheel size 160 x 50 mm	15	3712299
Comfort snow blade skid kit	12	3712298

Rear containers

The snow blade is delivered fully assembled. Optional accessories are supplied unassembled.

## MUNICIPAL SNOW PLOUGH



Illustration shows optional extra equipment


- Spring-loaded rubber strip (collision protection)
- Hydraulic adjustment with electric change-over switch
- Double-acting control unit required
- Pendulum adjustment
- Blade height 60 cm
- Hydraulic tilting: up to 30°

### Optional

- Wheel set
- Skids
- LED limiting lights



Further attachments on request  
(e.g. Hansa, etc.)



Designation	kg	Article no.
Municipal snow plough 1.50 m CAT 0/CAT 1	145	3720150
Municipal snow plough 1.80 m CAT 0/CAT 1	160	3720180
Municipal snow plough 2.00 m CAT 0/CAT 1	175	3720200
Municipal snow plough 2.20 m CAT 0/CAT 1	190	3720220
Municipal snow plough 1.5 m municipal triangle	142	3723150
Municipal snow plough 1.8 m municipal triangle	159	3723180
Municipal snow plough 2.0 m municipal triangle	167	3723200
Municipal snow plough 2.2 m municipal triangle	179	3723220
Municipal snow plough 1.5 m D-LOCK	175	3725150
Municipal snow plough 1.8 m D-LOCK	193	3725180
Municipal snow plough 2.0 m D-LOCK	200	3725200
Municipal snow plough 2.2 m D-LOCK	212	3725220
LED limiting lights	4	3712297
Municipal snow plough wheel set, wheel size 160 x 50 mm	12	3720400
Municipal snow plough skids	20	3720410

The snow plough is delivered fully assembled. Optional accessories are supplied unassembled.

# COMFORT SNOW PLOUGH



Illustration shows optional extra equipment

- › Hydraulic adjustment
- › Pendulum and height adjustment with springs for centring
- › Double-acting control circuit with solenoid valve and change-over switch for the cabin
- › Rubber strip with collision protection
- › Holders for support wheels or skids (except snow plough 2.00 m)
- › Minimum clearing width 30 cm smaller than blade width (by swivelling the snow blade)
- › Blade height 80 cm

### Optional

- › LED limiting lights
- › Wheel set and skids



Pendulum/height adjustment



Hydraulic tilting



Combination attachment

Designation	kg	Article no.
Comfort snow plough 2.0 m EURO/CAT 2	361	3714190
Comfort snow plough 2.2 m EURO/CAT 2	383	3714220
Comfort snow plough 2.6 m EURO/CAT 2	425	3714260
Comfort snow plough 2.9 m EURO/CAT 2	441	3714290
Comfort snow plough 2.0 m D-LOCK	405	3714195
Comfort snow plough 2.2 m D-LOCK	426	3714225
Comfort snow plough 2.6 m D-LOCK	458	3714265
Comfort snow plough 2.9 m D-LOCK	479	3714295
LED limiting lights	4	3712297
Snow blade/plough wheel set, wheel size 160 x 50 mm	15	3712299
Snow blade/plough skid set	12	3712298

The snow plough is delivered fully assembled. Optional accessories are supplied unassembled.

Box scraper

Rubber scrapers

Snow blades/ploughs

Transport boxes


Rear containers

## TRANSPORT BOX



Splash-proof transport box for transporting and storing e.g. tools, chainsaws or similar utensils.

- 3-point attachment CAT 1 (spread deviates from standard) and CAT 2
- with triangle hitch CAT municipal Attachment on smaller vehicles
- Load capacity 1.20 m: approx. 300 kg
- Load capacity 1.60 m: approx. 400 kg
- Attachment points for swivel castors available
- Sheet thickness: 2 mm



Designation	kg	Article no.
Transport box 1.20 m, internal dimensions = 1200 x 650 x 500 mm	110	3520010
Transport box 1.60 m, internal dimensions = 1600 x 650 x 500 mm	125	3520015
Municipal triangle for transport box	13	3520019
Set of 4 swivel castors	6.5	210500

## TRANSPORT BOX HD



The düvelsdorf HD transport box is ideal for agriculture and forestry, contractors and municipal services. With a width of 1.80 m and an internal volume of 1100 litres, you can transport tools, seeds, canisters or other utensils. The interior can be divided with two partitions that can each be moved so you can keep things organised.

The box is splash-proof, lockable and easy to open thanks to the gas pressure dampers.

The HD transport box is also equipped with a limiting light, mounting plates for swivel castors and an access opening for forklift trucks. The three-point attachment (CAT 1, spread deviates from standard, and CAT 2) allows the transport box to be quickly and safely mounted on a tractor. The load capacity is 1000 kg.

Designation	kg	Article no.
HD transport box 1.80 m, internal dimensions = 1790 x 890 x 900 mm	290	3520000
HD transport box, black	290	3520110
Set of 4 swivel castors	6.5	210500

Note: delivered unassembled. Final assembly approx. 1.5 hours

Box scraper

Rubber scrapers

Snow blades/ploughs

Transport boxes

Rear containers

## REAR CONTAINER HD



The rear container HD is suitable for heavy-duty operations. With a load capacity of 2.5 t and internal dimensions of W x D x H 1805 x 1240 x 600 mm, the rear container is suitable for transporting two EURO pallets with the flap closed.

With the optional accessories, the volume can be increased from 1.35 m<sup>3</sup> by 0.35 m<sup>3</sup> with the 300 mm side wall extension or by 1.15 m<sup>3</sup> with the 500 mm side wall extension. The 300 mm and 500 mm side wall extensions can be combined with each other.

All other accessories can only be mounted individually on the machine. The rear container HD can be attached to the three-point Cat 1/Cat 2 and using a EURO attachment on the front loader. With a dumping angle of 90°, the rear container HD can be used as a high-dump shovel in the front loader. A double-acting control unit is required for this.

Designation	kg	Article no.
Rear container HD 2.00 m	585	3521300
Side wall extension 300 mm	22	3521330
Side wall extension 500 mm	154	3521350
Posts	28	3521360
Conversion kit for swivelling flap	8.5	3521370
Lashing eyes (2 pieces for self-assembly)	1	3521380

Note: supplied fully assembled.

# REAR CONTAINER HD



Side wall extensions 300 mm and 500 mm



Posts



Swivelling flap



High-dump shovel

For use case video, see page 126

Box scraper

Rubber scrapers

Snow blades/ploughs

Transport boxes

Rear containers

## REAR CONTAINER STANDARD



Rear containers can be used as transport containers for tools and bulk goods. The standard rear container has a pendulum-mounted removable rear flap and a scrape rail.

- 3-point attachment CAT 1 (spread deviates from standard) and CAT 2
- Mechanical tipping device
- Universal for all tractors
- Low tare weight
- Load capacity: 500 kg
- Sheet thickness: 2 mm



Mechanical tipping device

Designation	kg	Article no.
Rear container standard 1.20 m, internal dimensions = 1200 x 800 x 600 mm	102	3520020
Rear container standard 1.40 m, internal dimensions = 1400 x 800 x 600 mm	113	3520040
Rear container standard 1.60 m, internal dimensions = 1600 x 800 x 600 mm	123	3520060
Rear container standard 1.80 m, internal dimensions = 1800 x 800 x 600 mm	133	3520080
Rear container standard 2.00 m, internal dimensions = 2000 x 800 x 600 mm	143	3520090

## REAR CONTAINER MECHANICAL



Box scraper

Rubber scrapers

Snow blades/ploughs

Transport boxes

A practical rear container for 3-point attachment with particularly solid workmanship and mechanical tipping device.

This creates a transport and storage option for every tractor.

- With rear flap
- Solid workmanship
- 3-point attachment CAT 1 and CAT 2
- Load capacity: 800 kg
- Scrape rail
- Sheet thickness: 2 mm



Mechanical tipping device

Designation	kg	Article no.
Rear container 1.40 m mechanical, internal dimensions = 1370 x 1000 x 400 mm	170	3520140
Rear container 1.60 m mechanical, internal dimensions = 1570 x 1000 x 400 mm	188	3520160
Rear container 1.80 m mechanical, internal dimensions = 1770 x 1000 x 400 mm	206	3520180

Rear containers

## REAR CONTAINER HYDRAULIC



Hydraulic tipping device, approx. 60°/single-acting

- With rear flap
- Solid workmanship
- 3-point attachment CAT 1 and CAT 2



Hydraulic rear container elevation

- Load capacity 1000 kg
- Scrape rail
- Sheet thickness: 3 mm

Designation	kg	Article no.
Rear container 1.60 m hydraulic, internal dimensions = 1560 x 1150 x 400 mm	339	3521160
Rear container 1.80 m hydraulic, internal dimensions = 1760 x 1150 x 400 mm	355	3521180
Rear container 2.00 m hydraulic, internal dimensions = 1960 x 1150 x 400 mm	372	3521200
Hydraulic rear container elevation, all sizes, height 500 mm	25	3521220

## EURO CONTAINER STANDARD



Box scraper

Rubber scrapers

The standard EURO container can easily be mounted in the tractor's EURO attachment and is therefore ready for use very quickly.

This lets you transport objects safely and conveniently with the front loader.



Snow blades/ploughs

Transport boxes

- With front flap
- Solid workmanship
- EURO attachment
- Load capacity 500 kg
- Scrape rail
- Sheet thickness: 2 mm
- Attachment points for swivel castors available

Designation	kg	Article no.
EURO container standard 2.00 m, internal dimensions: 2000 x 1000 x 600 mm	154	3520590
Set of 4 swivel castors	6.5	210500

Rear containers

Because perfect grassland  
begins with technology.



You can find our machinery as well as plenty of useful  
information about grassland maintenance in our complete  
rang of grassland maintenance technology.  
Please feel free to contact us or your dealer.

**düvelsdorf**

GRASSLAND MAINTENANCE TECHNOLOGY | Complete Range

## GREEN.RAKE mini



The **GREEN.RAKE mini** stands out with its compact size of 1.50 m or 2.00 m. The **GREEN.RAKE mini** is ideal for use in municipal areas or in fruit-growing and viticulture.

It flattens piles of earth and ventilates the turf in various stages, thereby making it the perfect machine for grassland maintenance e.g. in tree plantations or parks.

- › Attachment category CAT 1
- › Height-adjustable tine section
- › 10 mm tines
- › 83 mm tine spacing
- › Powder-coated frame
- › Tine guard

Designation	kg	Article no.
<b>GREEN.RAKE mini</b> 1.50 m	153	2613150
<b>GREEN.RAKE mini</b> 2.00 m	178	2613200

## GRASSLAND HARROWS



Grassland harrow 2.00 m, 3 rows

- Optimum ground adaptation capability
- Full number of cast stars to make use of the complete working width
- Minimised wear of steel rings due to optimised shape of cast stars
- Up to grassland harrow 4.00 m, 3-row attachment in CAT 1
- From grassland harrow 4.00 m, 4-row attachment in CAT 2
- Hydraulic hinges for the side elements incl. safety lock possible from harrow 4.00 m
- Transport width 2.00 m: 2.10 m
- Transport width 3.00 m: 1.75 m
- Transport width 4.00 m and 5.00 m: 2.10 m



Grassland harrow 4.00 m, 3 rows

Designation	kg	Article no.
Grassland harrow 2.00 m, 3 rows	176	2517200
Grassland harrow 3.00 m, 3 rows	220	2517300
Grassland harrow 4.00 m, 3 rows	286	2517400
Grassland harrow 4.00 m, 4 rows	335	2517406
Grassland harrow 5.00 m, 4 rows	450	2517506
Grassland harrow 5.00 m, 4-row, hydraulic	500	2517508
Hydraulic operation grassland harrow 4.00/5.00 m	50	2516100
Lighting for grassland harrow (only with hydr. operation)	20	2519700

Note: delivered unassembled. Assembly time: approx. 1 hour.

Grassland harrows with hydraulic hinges are supplied assembled, unassembled on request.

## GRASSLAND HARROWS



Grassland harrow 8.00 m, 4-row, hydraulic hinge

- Optimum ground adaptation capability (negative adjustment of up to - 5%)
- 4-row
- Hydraulic hinge
- Safety lock for safe road transport
- Robust 3-point hitch CAT 2
- Full number of cast stars to make use of the complete working width
- Minimised wear of steel rings due to optimised shape of cast stars
- Transport width: 2.90 m



Grassland harrow 6.00 m, 4-row galvanised

Designation	kg	Article no.
Grassland harrow 6.00 m, 4 rows	600	2517606
Grassland harrow 6.00 m, 4-row galvanised	600	2520606
Grassland harrow 8.00 m, 4-row*	815	2517806
Lighting grassland harrow	20	2519700

\*grassland harrow 8 m, 4-row is delivered partially assembled, ends of the boom must be assembled once delivered. Assembly time: approx. 30 minutes.

Note: grassland harrows with hydraulic hinges are supplied assembled, unassembled on request.

# GRASSLAND HARROW 6.00 M WITH TINE SECTION



Grassland harrow 6.00 m with tine section

- Towing and raking in one operation
- Harrow levels molehills and other uneven ground
- Tine section removes moss and aerates firm soil
- Tine section can be retrofitted for grassland harrows 6.00 m, 4-row built in 2012 or later

## Technical data

Working width	6.00 m
Tine spacing	120 mm
Bar spacing	300 mm
Tine diameter	10 mm
Number of tines	51
Setting positions	4

## GRASSLAND HARROW 6.00 M WITH TINE SECTION



Grassland harrow 6 m with tine section and seeder

The grassland harrow 6 m with tine section can also be equipped with the ES 8 Standard seeder. This makes it possible to re-seed grassland in a single step.



Designation	kg	Article no.
Grassland harrow 6.00 m, 4-row with tine section	882	2521100
Grassland harrow 6 m, 4-row with tine section, ES 8 Standard Profi seeder and lighting (fully assembled)	988	2521200
Tine section grassland harrow 6.00 m	232	2521000
Lighting tine section	14	2521150

Please note: grassland harrows with hydraulic hinges are supplied assembled, unassembled on request.

## GRASSLAND HARROW HD



Grassland harrow HD 6.00 m, 4-row

The grassland harrow HD has a particularly robust frame. The robust joints, the strong 3-point hitch and the large cylinders make the HD suitable for professional use. A safety lock comes as standard on the hydraulic cylinders to prevent the harrow from opening unintentionally when driving on the road.

The grassland harrow HD is equipped with 4.5 kg HD stars.

- Powder-coated frame
- Robust 3-point attachment CAT 2
- Large hinges
- Safety lock for safe road transport
- Heavy 4.5 kg HD stars
- Transport width: 3.00 m

### Optional

- Seeders
- Tread
- Skid
- LED lighting set



HD star

Designation	kg	Article no.
Grassland harrow HD 6.00 m	1100	2614600
Grassland harrow HD 8.00 m	1250	2614800
Mounting kit seeder HD/HDO	80	2618100
Skid HD/HDO	6	2618200
LED lighting set	30	2618110

Note: grassland harrows with hydraulic hinges are supplied assembled, unassembled on request.

## GRASSLAND HARROW HDO



HDO 6.00 m, unfolded

The frame's open construction means it can adapt particularly well to the ground to ensure molehills, cow pat and other residues get well flattened.

The grassland harrow HDO is equipped with the heavy 4.5 kg HD stars.

- Robust 3-point attachment CAT 2
- Large hinges
- Safety lock for safe road transport
- Heavy 4.5 kg HD stars
- Transport width: 3.00 m

### Optional

- Seeders
- Tread
- Skid
- LED lighting set

Designation	kg	Article no.
Grassland harrow HDO 6.00 m	1080	2615600
Grassland harrow HDO 8.00 m	1230	2615800
Mounting kit seeder HD/HDO	80	2618100
Skid HD/HDO	6	2618200
LED lighting set	30	2618109

Note: grassland harrows with hydraulic hinges are supplied assembled, unassembled on request.

## GRASSLAND HARROW ACCESSORIES



Spare mesh



Skid



Combination star



HD star

Designation	kg	Article no.
Mesh 2.00 m, 3-row	54	2518210
Mesh 3.00 m, 3-row	82	2518310
Mesh 4.00 m, 3-row	111	2518410
Mesh 5.00 m, 3-row	145	2518510
Mesh 6.00 m, 3-row	168	2518610
Mesh 4.00 m, 4-row	137	2518411
Mesh 5.00 m, 4-row	189	2518511
Mesh 6.00 m, 4-row	223	2518611
Mesh 8.00 m, 4-row	302	2518621
HD mesh 6.00 m	306	2518612
HD mesh 8.00 m	409	2518622
Combination star	2.2	2516005
HD star	4.5	2516010
Ring harrow mesh (ø 150 mm)	0.55	2516020
Ring small harrow mesh (ø 70 mm)	0.21	2516015
Skid for grassland harrow 6.00/8.00 m	4.5	2518850

# Seeders



We have a range of seeder designs so we can provide the right machine for every kind of usage. There are differences in the number of outputs and their diameters, as well as in the blower drive unit and the resulting conveying capacity.

Three different control systems are available for the seeders. The electric seeders (ES 8 Standard/ES 8 Turbo) are equipped with the Profi control system. This allows the seeder to be switched on and off from the cabin, the spread rate to be continuously adjusted and a calibration test to be carried out. The Profi Speed control system is available as an option for the ES 8 Turbo, which enables speed-dependent sowing.

## The **SEED.CON** control system is available for all Turbo seeders.

This wireless control system with intuitive user interface is controlled via your own mobile phone or tablet. All settings can be done either from the cabin or directly next to the device.

The control system allows the spread rate to be regulated depending on the speed.



For use case video, see page 126

In addition to using a mobile phone/tablet, operation (including parallel) can be executed via an ISOBUS terminal.

# Rakes and rollers for every application



**GREEN.RAKE** vario



**GREEN.RAKE** expert



**TERRA.ROLLER** expert



**GREEN.RAKE** combi



**GREEN.RAKE** classic



**GREEN.ROLLER** classic

**GREEN.ROLLER classic**



With the düvelsdorf **GREEN.ROLLER classic** meadow rollers, all components such as the unbraked/braked chassis as well as LED lighting can be retrofitted. Furthermore, the meadow rollers can be combined to form a coupled trailer.

- Robust frame made of 180 mm square tubing
  - Drum diameter approx. 1200 mm
  - Drum wall thickness min. 12 mm
  - Continuous shaft in the rolling element
  - Centre partition
  - 2 x water filler necks
  - Spherical roller bearings
  - Spring-loaded, adjustable scraper
  - Parking support, adjustable spindle
  - 2.70 m roller has a transport width of 3.00 m
  - Water capacity approx. 1000 l/m working width
- Optional**
- Chassis unbraked/braked
  - LED lighting set
  - Coupled trailer kit, to connect three rollers together



Coupled trailer attachment kit

Designation	kg	Article no.
<b>GREEN.ROLLER classic</b> <sup>1</sup> 2.70 m	2170	3015275
<b>GREEN.ROLLER classic</b> <sup>1</sup> 3.00 m	2400	3015300
LED lighting set	8	3015700
Coupled trailer kit	90	3015900

<sup>1</sup> using secondary raw materials

Note: delivered unassembled. Assembly time approx. 0.5 hours.

## GREEN.ROLLER classic CHASSIS



Working width 2.70 m  
3.00 m transport width, water  
capacity: approx. 1000 l/m

### GREEN.ROLLER classic chassis, unbraked

The unbraked chassis means the roller can be transported comfortably on public roads up to an axle load of 3500 kg and a speed of 40 km/h.

#### Standard equipment for the GREEN.ROLLER classic

- Tyres 11.5/80-15.3
- Can be filled with water
- Axle unbraked
- Lighting with warning signs

### GREEN.ROLLER classic chassis, braked

The roller can be braked via the compressed air brake system by swivelling the chassis over. It is equipped with a compressed air brake system and a TÜV certificate for obtaining a general operating permit as standard.

#### Standard equipment for the GREEN.ROLLER classic

- Tyres 12.5/80-18
- Axle braked
- Lighting with warning signs
- Drum is braked by the chassis
- TÜV certificate 40 km/h
- Hydraulic connections labelled with KENNFIXX®

Designation	kg	Article no.
GREEN.ROLLER classic chassis <sup>1</sup> 2.70 m, unbraked	2720	3016275
GREEN.ROLLER classic chassis <sup>1</sup> 3.00 m, unbraked	2950	3016300
GREEN.ROLLER classic chassis <sup>1</sup> 2.70 m, air-braked	2770	3017275
GREEN.ROLLER classic chassis <sup>1,2</sup> 3.00 m, air-braked	3000	3017300

<sup>1</sup> using secondary raw materials    <sup>2</sup> 3.00 m = 3.21 m transport width

Note: delivered unassembled. Assembly time approx. 2.5 hours.

## GREEN.ROLLER eco



Drawbar

**GREEN.ROLLER eco** is supplied with a 3-point hitch as standard. Scraper, parking support and water filling nozzle come as standard.

A tow bar is available as an option.

- Roller body diameter: 820 mm
- 3-point attachment CAT 2
- Powder-coated frame
- 9 mm rolling element wall thickness
- 2 x water filler necks, water capacity: 500 l/m

Designation	kg	Article no.
<b>GREEN.ROLLER eco</b> <sup>1</sup> 1.50 m	486	3011150
<b>GREEN.ROLLER eco</b> <sup>1</sup> 2.00 m	648	3011200
<b>GREEN.ROLLER eco</b> <sup>1</sup> 2.50 m	810	3011250
Drawbar <b>GREEN.ROLLER eco</b>	60	3011050

<sup>1</sup> using secondary raw materials

## LAWN ROLLER



Ideal for use in gardens and municipal areas. Simply pull by hand with a handle or hang onto the ride-on mower with the towing eye.

- Diameter: 65 cm
- Working width: 85 cm
- Empty weight: 90 kg
- Weight filled with water: approx. 400 kg
- Wall thickness: 6 mm
- Adjustable, spring-loaded scraper
- With handle and towing eye as standard
- Powder-coated frame
- 2 x water filler necks

Designation	kg	Article no.
Lawn roller	90	3012085

Because your farmland  
deserves special technology.



You can find our machinery  
for comprehensive soil  
cultivation in our complete  
range of agricultural technology.  
Please feel free to contact us or  
your dealer.



## FRONT PACKER

For use case video, see page 126



The düvelsdorf front packer is the solution for a well-prepared seedbed and therefore makes for ideal preparation for successful sowing. When the front packer passes over the soil, it reconsolidates the ground very well and breaks clods of soil into fine crumbs. Reconsolidation helps the tractor not sink into the ground and minimises rutting.

The split rings allow quick replacement without dismantling the entire roller. Scrapers are fitted between the rings to prevent sticking. The optional preparation tools increase the usefulness of the machine and are recommended depending on your soil conditions.

- Robust, powder-coated frame
- Half-shell toothed rings with a 565 mm diameter made from ductile iron
- with preparation tools, tine attachment, levelling bar and knife roller available

Total length of the machine:

- Front packer 0.90 m
- With tine attachment 1.80 m
- With levelling bar 1.53 m
- With knife roller 1.47 m

Designation	kg	Article no.
Front packer 3.00 m	850	2710300
Front packer with tine attachment (mounted)	1125	2710385
Front packer with knife roller (mounted)	1360	2710390
Front packer with levelling bar (mounted)	1150	2710395
Front packer tine attachment 3.00 m	275	2711100
Front packer levelling bar 3.00 m	300	2711300
Front packer knife roller 3.00 m	510	2711200
Front packer lighting set 3.00 m	10	2710310
Front packer hydraulic levelling bar	18	2711350

## **TERRA.ROLLER** eco



The **TERRA.ROLLER** eco with Cambridge or toothed rings is suitable for versatile tasks in farm and grassland. With the CAT 1 (spread deviates from standard) and CAT 2 three-point hitch, it can be used both as a front packer as well as a three-point roller at the rear.

It is also possible to couple the roller with the **GREEN.RAKE** expert in order to use it for grassland reconsolidation directly behind the rake. A seeder can also be mounted.

Additional information regarding the **TERRA.ROLLER** eco can be found in our complete range of grassland maintenance and agricultural technology. Please ask your dealer.

## TERRA.ROLLER eco



TERRA.ROLLER eco with optional seeder

Designation	kg	Article no.
<b>TERRA.ROLLER eco</b> 1.20 m Cambridge Ø 460 mm	375	2929505
<b>TERRA.ROLLER eco</b> 1.20 m Cambridge Ø 550 mm	465	2929510
<b>TERRA.ROLLER eco</b> 1.20 m toothed ring*	430	2929515
<b>TERRA.ROLLER eco</b> 1.60 m Cambridge Ø 460 mm	460	2929605
<b>TERRA.ROLLER eco</b> 1.60 m Cambridge Ø 550 mm	576	2929610
<b>TERRA.ROLLER eco</b> 1.60 m toothed ring*	565	2929615
<b>TERRA.ROLLER eco</b> 1.80 m Cambridge Ø 460 mm	515	2929705
<b>TERRA.ROLLER eco</b> 1.80 m Cambridge Ø 550 mm	650	2929710
<b>TERRA.ROLLER eco</b> 1.80 m toothed ring*	630	2929715
<b>TERRA.ROLLER eco</b> 2.00 m Cambridge Ø 460 mm	570	2929805
<b>TERRA.ROLLER eco</b> 2.00 m Cambridge Ø 550 mm	720	2929810
<b>TERRA.ROLLER eco</b> 2.00 m toothed ring*	700	2929815
<b>TERRA.ROLLER eco</b> 2.50 m Cambridge Ø 460 mm	642	2929030
<b>TERRA.ROLLER eco</b> 2.50 m Cambridge Ø 550 mm	913	2929230
<b>TERRA.ROLLER eco</b> 2.50 m toothed ring*	889	2929130
<b>TERRA.ROLLER eco</b> 3.00 m Cambridge Ø 460 mm	739	2930030
<b>TERRA.ROLLER eco</b> 3.00 m Cambridge Ø 550 mm	1065	2940230
<b>TERRA.ROLLER eco</b> 3.00 m toothed ring*	1029	2930130

\* The toothed rings are made of ductile iron.



The düvelsdorf drum mower **dCUT** is designed for use on all meadows and fields. Whether as a secondary mower for large farms, or as a single mower for part-time or small farms – this mower is suitable for all farm sizes. The drive shaft must be removed when swivelling into the transport position.

Working width in m	1.35 MINI	1.35	1.65	1.85	2.10
Hydraulic lifting*	No	No	Optional	Optional	Yes
Number of drums	2	2	2	2	2
Drum diameter in m	0.63	0.63	0.78	0.88	1.0
Number of blades	4 (2x2)	4 (2x2)	6 (2x3)	6 (2x3)	8 (2x4)
Surface area output in ha/h	1.00	1.00	1.40	1.90	2.50
Power requirement in hp (approx.)	25	25	40	60	95
Attachment	CAT 1 + CAT 2	CAT 1 + CAT 2	CAT 1 + CAT 2	CAT 2	CAT 2 + CAT 3
Drive shaft with shear bolts	Optional	Optional	Optional	Optional	Yes
Integrated freewheeling	Yes	Yes	Yes	Yes	Yes

\*Hydraulic lift swings 85° upwards

Designation	kg	Article no.
Drum mower <b>dCUT</b> 1.35 m MINI**	280	2811100
Drum mower <b>dCUT</b> 1.35 m**	300	2811200
Drum mower <b>dCUT</b> 1.65 m	349	2811300
Drum mower <b>dCUT</b> 1.85 m	410	2811400
Drum mower <b>dCUT</b> 2.10 m	571	2811500
Hydraulic lifting <b>dCUT</b> 1.65 m	15	2820100
Hydraulic lifting <b>dCUT</b> 1.85 m	15	2820105
Drive shaft with shear bolts <b>dCUT</b>	8	210110

\*\* The lateral offset between the PTO shaft and the drum is 630 mm for the dCUT 1.35 MINI and 880 mm for the dCUT 1.35.

Note: delivered unassembled. Final assembly approx. 2 hours (side plates, swath protection)

## SWING ARM MOWER



Swing arm mower with drive shaft and tensioning chains



Blade carrier



Blade with shear bolts

The düvelsdorf swing arm mower with 2.00 m working width is ideal for mowing long grass on small and medium-sized fields and pastures.

It is possible to mount the hitch in various positions so that the mulcher can be driven laterally offset behind the tractor.

The mowing height can be adjusted at the skids.

- Drive shaft as standard
- CAT 2
- For tractor sizes from 40 - 50 hp
- Mowing speed: 5-6 km/h for changing crops

Designation	kg	Article no.
Swing arm mower 2.00 m	400	2630200

Note: delivered unassembled. Assembly time: approx. 1 hour. Delivery does not include gear oil.

## SILAGE ROLLER PRO

For use case video, see page 126



- › Side shift 600 mm (300 mm per side)
- › Maintenance-free side shift in plastic guide
- › Drum diameter 1070 mm
- › Fin height/width 175 mm/16 mm
- › Water capacity approx. 1000 l
- › CAT 2/CAT 3
- › 1 x double-acting connection
- › Transport width 2.99 m
- › LED lighting
- › Towing eye 15 t
- › Four rollers
- › Maximum weight 3980 kg (fully equipped with water)
- › Hydraulic connections labelled with KENNFIXX®

### Boom:

- › Boom with 2x wheels 500/50 R17
- › Edge angle max. 52°
- › Boom with high contact pressure (5250 N)
- › Contact pressure adjustable via pressure relief valve
- › Hydraulic oil 15 - 25 l/min. in circulation

### Electric pressure adjustment:

- › Boom contact pressure can be individually adjusted from the cabin

### Towing device:

- › Towing device (15 tonnes) via wire rope
- › Vertically and horizontally spring-centred
- › 1x double-acting connection
- › Hook for towing eye

# SILAGE ROLLER PRO



Grassland maintenance

Rollers

Mowers/Mulchers

Silage technology

Levelling blade/Riding arena surface rake



Set of two hooks  
incl. holder



Set of two hooks for 3-point  
hitch incl. holder

Designation	kg	Article no.
Silage roller per 2.50 m	1850	2912250
Silage roller per 2.50 m boom right (side shift limited to 400 mm)	2180	2912255
Silage roller per 3.00 m	1995	2912300
Silage roller side shift 3.00 m, boom right	2380	2912310
Silage roller side shift 3.00 m Boom right/left (2 x double-acting connections) <sup>1</sup>	2770	2912320
Silage roller side shift 3.00 m Boom right/left (3 x double-acting connections) <sup>2</sup>	2770	2912330
Electric pressure adjustment silage roller	1.5	2912390
Towing device (incl. 1 x set of two hooks)	96	2912370
Set of two hooks for towing eye incl. holder <sup>3</sup>	29	2912375
Set of two hooks for 3-point hitch incl. holder <sup>3</sup>	24	2912377

<sup>1</sup> The booms (right/left) are preselected from the cabin using an electric change-over valve and operated via a double-acting control unit.

<sup>2</sup> The booms (right/left) are operated separately from each other via two double-acting control units.

<sup>3</sup> A maximum of 4 sets can be carried on the roller.

## SILAGE ROLLER BASIC



The düvelsdorf silage roller, with its high tare weight and large drum, offers excellent, quick silage compaction with good rolling characteristics. The drum's twelve high, corrugated fins are used for deep compaction. When working in silage walls, the four rollers prevent damage to the silage roller and walls. The edge of the silage is additionally compacted using the boom. The contact pressure can be adjusted via a pressure relief valve.

As an option, the contact pressure can also be adjusted via the electric pressure adjustment function from the cabin.

- › Drum diameter 1070 mm
- › Fin height/width 175 mm/16 mm
- › Water capacity approx. 1000 l
- › CAT 2/CAT 3
- › Transport width 2.99 m
- › LED lighting
- › Towing eye 15 t
- › Four rollers
- › Maximum weight 3100 kg (fully equipped with water)

### Boom

- › Boom with 2 wheels 500/50 R17
- › Edge angle max. 52°
- › Boom with high contact pressure (4500 N)
- › Contact pressure adjustable via pressure relief valve
- › Hydraulic oil 15 - 25 l/min. in circulation

## MAIZE LEVELLER



During the maize harvest, it is important for fodder to be levelled and compacted; this still has to be guaranteed even given the high efficiency rate of today's forage harvesters.

With a total width of 3.00 m, the maize leveller does not exceed the permissible transport width for public roads. The 3.70 m maize leveller is only intended for use within a farm due to its dimensions. The blade is suitable for 3-point attachment CAT 2 and CAT 3 in front or rear hydraulics.

The pulling point between the bottom links allows other implements to be towed without putting load on the top link. Viewing slots give a good view of the working area.

- Robust design
- Depth: 600 mm
- Height: 1200 mm
- Side wall depth: 450 mm
- Wall thickness: 10 mm
- With towing eye
- Integrated skids



Designation	kg	Article no.
Maize leveller 3.00 m	630	2920300
Maize leveller 3.70 m	725	2920370
LED limiting lights	4	3712297

## FOLDING MAIZE LEVELLER



Wide, robust and can be ballasted.

The large pushing volume, good overview and optimum weight adjustment to the tractor make the new folding maize leveller an impressive piece of equipment.

- Transport width under 3 m for safe road transport
- Swivelling range of 165° for high flexibility when pushing and edging
- Fully equipped version with 5.3 m working width and 2.4 t weight for optimum silage compaction
- Optional grille attachment enables maximum pushing volume with full visibility
- Safe working in the dark thanks to optional working and limiting lights
- Additional ballasting with steel weights and water tank

# FOLDING MAIZE LEVELLER

## Technical data

Working width in m	4.30	5.30
Transport width in m	2.59	2.99
Blade height in m	1.12	
Blade height incl. elevation in m	1.54	
Blade depth in m	0.99	1.28
Swivelling range	165°	
Stem length in m	1.47	1.64
Attachment	CAT II/III (bolt diameter CAT III)	CAT II/III/IV (bolt diameter CAT III)
Hydraulic system	2 double-acting connections (optional: 1 double-acting connection with electric change-over valve)	
Operating pressure in bar	180	
Weight of basic machine in kg	1,250	1,535
Weight incl. elevation in kg	1,320	1,650
Weight incl. steel weight in kg	1,450	1,735
Weight incl. water tank in kg	1,800	2,085
Weight fully equipped in kg	2,070	2,400

Designation	kg	Article no.
Folding maize leveller 4.3 m (2 double-acting connections)	1,250	2923430
Folding maize leveller 5.3 m (2 double-acting connections)	1,535	2923530
Folding maize leveller 4.3 m (1 double-acting connection)	1,250	2923435
Folding maize leveller 5.3 m (1 double-acting connection)	1,535	2923535
Grille attachment 4.3 m	67	2923440
Grille attachment 4.3 m	77	2923540
Water tank 350 l	170	2923550
Additional weight steel 200 kg	200	2923560
Limiting lights	4	2923570
Working lights	4.5	210080

Grassland maintenance

Rollers

Mowers/Mulchers

Silage technology

Levelling blade/Riding arena surface rake

# TELESCOPIC MAIZE LEVELLER



- Telescopic working width with continuous adjustment
- Compact design and short stem length ensure high manoeuvrability in small bunker silos and good driving characteristics on the road
- Driving on the road is safe thanks to the shut-off valve
- Integrated towing eye
- Height: 1350 mm
- Blade depth: 500 mm
- Width: min. 2.60 m to max. 4.40 m
- Hydraulic system: 1 x double-acting
- CAT 2 + CAT 3
- Hardox cutting
- Wall thickness: 10 mm
- Hydraulic connections labelled with KENNFIXX®



### Optional:

- LED limiting lights

### Transport width:

- 2.60 m - 4.00 m = 2592 kg
- 3.00 m - 4.40 m = 2990 kg



Maize leveller pushed out

Designation	kg	Article no.
Telescopic maize leveller 2.60 - 4.00 m	1685	2921400
Telescopic maize leveller 3.00 - 4.40 m	1800	2921440
LED limiting lights	4	3712297

## PHOTOGRAPHS FROM PRODUCTION



Rollers Grassland maintenance

Mowers/Mulchers



Silage technology

Levelling blade/Riding arena surface rake

## LEVELLING BLADE



The levelling blade works hydraulically to level surfaces quickly and easily.

- › Levelling blade for 3-point attachment CAT 2
- › Width 2.50 - 2.90 m
- › Standard width extension 20 cm on each side
- › Minimum clearing widths 1.70 m - 2.00 m
- › Blade can be set at an angle of max. 40° to the tractor
- › Possible offset of approx. 75 cm to the left and right of the middle axis
- › Inclination angle adjustable by 25°
- › Adjustable support wheel as standard feature
- › Sturdy frame
- › Blade height approx. 45 cm
- › Hardox 450 scrape rail
- › 2 double-acting control units required
- › Output: 55 - 100 hp



Designation	kg	Article no.
Hydraulic levelling blade	371	3610250

Note: delivered unassembled. Final assembly approx. 4 hours

## RIDING ARENA SURFACE RAKE



Hot-dip galvanised frame with 1.50 m, 2.00 m or 2.50 m working width. 3-point attachment. Suitable for every type of riding ground.

Standard with:

- Adjustable top link
- Roller wheel
- Hot-galvanised track leveller
- Replaceable tines
- Adjustable levelling blade
- 3-point attachment CAT 1 and CAT 2



Roller wheel as standard

Designation	kg	Article no.
Riding arena surface rake 1.50 m	90	3620150
Riding arena surface rake 2.00 m	120	3620200
Riding arena surface rake 2.50 m	135	3620250

# AUGER



The düvelsdorf auger is delivered with a drill body. Drill bodies are available with a diameter of 150 mm, 300 mm and 450 mm. The drill bodies are equipped with cutting blades that can be replaced. The drive shaft supplied is equipped with a friction clutch. This drives the oil bath gear unit. The drilling depth is 100 cm. The design of the auger permits safe, space-saving parking as well as easy coupling to the tractor.

- 3-point attachment CAT 2
- Powder-coated frame
- 2.3 l oil SAE 85/W 90 (not included in delivery)
- Perpendicular drilling indicator

Drill body  
150 mm      300 mm      450 mm



Oil quantity with hydraulic drive:  
Min. 90 l/min. at max. 180 - 200 bar.  
Attention! Fill the gear unit with oil before initial operation! Oil is not included in delivery.

Designation	kg	Article no.
Auger incl. 150 mm drill body	138	3639110
Auger incl. 300 mm drill body	169	3639100
Auger incl. 450 mm drill body	230	3639120
Hydraulic drive auger	140	3639040
Drill body 150 mm	34	3639005
Drill body 300 mm	40	3639004
Drill body 450 mm	95	3639007

Note: delivered unassembled. Final assembly approx. 1 hour

## CONCRETE MIXER



Attention! Fill the gear unit with oil before initial operation! Oil is not included in delivery.

The concrete mixer 750 L can be used for quick, convenient, inexpensive and high-quality production of even large quantities of concrete, mortar and screed. It can also be used to mix dry TMR for calves, for example.

The concrete mixer can be picked up by the tractor hydraulic system or with a pallet fork.

Oil bath gear unit drive with normal PTO profile.

Recommended tractor power: from 70 hp

- › Solid workmanship
- › Sturdy oil bath gear unit
- › Spring-loaded agitator arms with adjustable agitator blades
- › Side wall scraper
- › 3-point attachment CAT 2
- › Sheet thickness: floor 6 mm/wall 5 mm
- › 4.3 l oil SAE 85/W90 or SAE 90 EP (not included in delivery)
- › Pockets for pallet forks

### Scope of supply

- › Splash plate, tipping bracket, side wall scraper, outlet, bag opener and heavy-duty protective grille

### Optional

- › Drive shaft with shear bolts
- › Swivelling outlet

Designation	kg	Article no.
Concrete mixer DBM 750 L	570	7525500
Drive shaft with shear bolts	13	210110
Concrete chute, swivelling	32	7525100

## UNIVERSAL SCREW CONVEYOR

Stainless steel

Oil volume: max. 20 l/min. at max. 180 bar. If these values are exceeded, then a flow control valve must be fitted!



Figure shows optional extra equipment subject to a charge

- Drive via hydraulic motor with 4.00 m hose (requires 1 single-acting + 1 non-pressurised return flow line)
- Total length 3.00 m, Ø 140 mm
- Stainless steel for a long service life
- Filling hopper with sieve
- Cleaning slide gate for easy cleaning
- Painted attachment parts to fit all tipper vehicles
- Inclination adjustment by means of rope pulleys and metal braces
- Conveying capacity approx. 20 t/h



Shutdown via bypass

### Optional

- Shutdown via bypass with shut-off valve and hoses
- Outlet hose, 1.20 m with clamp
- Rope winch

Designation	kg	Article no.
Screw conveyor 3.00 m	94	4210150
Shutdown via bypass	2	4230100
Outlet hose, 1.20 m with clamp	2	4210400
Rope winch	5	4210490

## SQUARE PASTURE FEEDERS



- With 12 feeding places
- Transport possible with linkage drawbar
- With collecting trough and roof covering
- Roof with protected corners
- Roof adjustable in height
- Supplied unassembled

Technical data:

- Length 2000 mm
- Width 2000 mm
- Height approx. 2600 mm



Corner protection for the roof



- With 8 feeding places
- Folding attachment
- Forklift pockets
- With collecting trough and roof covering
- Roof with corner protection all around
- Roof adjustable in height
- Supplied unassembled

Technical data:

- Length 1500 mm
- Width 1500 mm
- Height approx. 2200 mm

Designation	kg	Article no.
Square pasture feeder with palisade feeding grating, 12 places (sale, while stocks last)	360	1050550
Square pasture feeder with palisade feeding grating, 8 places (sale, while stocks last)	225	1050530

Note: delivered unassembled. Final assembly approx. 2 hours

## LOG GRIPPER COMBI ROTATOR



The log gripper with rotator is suitable for stacking and moving logs. The endless rotator with a load capacity of 4.5 t and the gripper with an opening width of 1560 mm make working comfortable.

It can be attached to the front loader with a EURO attachment or in the three-point hitch with a CAT 2 attachment.

Two double-acting control units are required for operation. The functional shield is equipped with chain slots and offers the possibility of stacking and pushing logs together.

➤ Operating pressure: max. 180 bar

Designation	kg	Article no.
Log gripper COMBI Rotator	285	3523350

## LOG GRIPPER COMBI



- Min. gripper opening 200 mm
- Max. gripper opening 1560 mm
- Cylinder closing force 9000 kg

The combination log gripper has both a front loader EURO attachment and a 3-point attachment CAT 2.

The gripper can be either rigidly or pendulum-mounted. A perfectly safe conversion to the rigid version is possible without tools by simply inserting the locking bolts. It is not necessary to dismantle the gripper.

- Pendulum-mounted in universal joint
- Tractor size from 44 kW
- 1 double-acting connection required

Designation	kg	Article no.
Log gripper COMBI	285	3523370
Hydraulic drive log gripper COMBI	15	3523175

## TIMBER GRAB EURO



- 1 x double-acting connection required
- EURO attachment
- Robust device for use in agriculture, forestry and municipal services, etc.

The timber grab with double hydraulic upper arm makes it safe and practical to move, stack and load logs. The large opening width means several trunks can be picked up quickly and safely at the same time.

- Load capacity: up to 1600 kg
- Opening width:  
min. 140 mm - max. 1250 mm
- Width: 1200 mm
- Depth: 1000 mm
- Operating pressure: max. 180 bar

Designation	kg	Article no.
Timber grab EURO	300	3523500

Note: delivered unassembled. Final assembly approx. 30 minutes

## REINFORCED CONCRETE WEIGHT CAT 2



Designation	kg	Article no.
Reinforced concrete weight 450 kg black	450	2821100
Reinforced concrete weight 750 kg black	750	2821200
Reinforced concrete weight 1050 kg black	1050	2821300
Reinforced concrete weight 1450 kg black	1450	2821400
Trailer manoeuvring aid	6	2821450
Reinforced concrete weight 450 kg grey, with trailer manoeuvring aid	450	2821120
Reinforced concrete weight 750 kg grey, with trailer manoeuvring aid	750	2821220
Reinforced concrete weight 1050 kg grey, with trailer manoeuvring aid	1050	2821320
Reinforced concrete weight 1450 kg grey, with trailer manoeuvring aid	1450	2821420

## REINFORCED CONCRETE WEIGHT MUNICIPAL TRIANGLE



Designation	kg	Article no.
Reinforced concrete weight municipal triangle 150 kg grey	150	2821600
Reinforced concrete weight municipal triangle 250 kg grey	250	2821610

## REINFORCED CONCRETE WEIGHT BOX CAT 2



Internal dimensions of the box

➤ L x W x H 210 x 1200 x 485 mm

➤ Lock

➤ Sheet metal lid with rubber seal



Designation	kg	Article no.
Reinforced concrete weight box 1050 kg grey with black lid	1050	2821501
Reinforced concrete weight box 1250 kg grey with black lid	1250	2821511
Reinforced concrete weight box 1450 kg grey with black lid	1450	2821521
Reinforced concrete weight box 1550 kg grey with black lid	1550	2821531
Reinforced concrete weight box 1750 kg grey with black lid	1750	2821541
Reinforced concrete weight box 1050 kg grey with red lid	1050	2821503
Reinforced concrete weight box 1250 kg grey with red lid	1250	2821513
Reinforced concrete weight box 1450 kg grey with red lid	1450	2821523
Reinforced concrete weight box 1550 kg grey with red lid	1550	2821533
Reinforced concrete weight box 1750 kg grey with red lid	1750	2821543
Reinforced concrete weight box 1050 kg grey with green lid	1050	2821502
Reinforced concrete weight box 1250 kg grey with green lid	1250	2821512
Reinforced concrete weight box 1450 kg grey with green lid	1450	2821522
Reinforced concrete weight box 1550 kg grey with green lid	1550	2821532
Reinforced concrete weight box 1750 kg grey with green lid	1750	2821542

## REINFORCED CONCRETE WEIGHT CAT 0 - 1



Designation	kg	Article no.
Reinforced concrete weight 0-1 250 kg grey	250	2821620
Reinforced concrete weight 1 400 kg grey	400	2821630
Reinforced concrete weight 1 700 kg grey	700	2821640

## REAR WEIGHT



Designation	kg	Article no.
Rear weight CAT 2 600 kg grey	600	2821800
Rear weight CAT 2 900 kg grey	900	2821810
Rear weight CAT 2 1.250 kg grey, bolt diameter CAT 3	1250	2821820
Rear weight CAT 2 1.450 kg grey, bolt diameter CAT 3	1450	2821830

### 3-POINT ATTACHMENT WITH TRAILER-HITCH BALL

This device is suitable for transporting and manoeuvring caravans, boat trailers or car trailers on private property, for example.

- 3-point attachment
- Bolt diameter top link: 19 mm (CAT 1)
- Bolt diameter bottom link: 22 mm (CAT 1)
- Internal dimension bottom link: 820 mm (CAT 2)
- Car trailer hitch K50
- Coupling load: 150 kg
- Towing capacity: max. 3500 kg



Attention

**Not licensed for use in areas covered by the Road Traffic Act / Road Traffic Licensing Regulations!**

Designation	kg	Article no.
Three-point with trailer-hitch ball	24	3519220

### TRACTOR AND TRIANGLE HITCH



Tractor triangle hitch CAT 2 standard

The tractor triangle hitch has a trailer-hitch ball with two external rollers for safe gripping and low-wear rolling coupling.

The CAT 2 Standard tractor triangle hitch is somewhat simpler than the CAT 2 tractor triangle hitch. It is suitable for devices up to 1400 kg.



Triangle hitch

Triangle hitch for devices up to 1500 kg

Designation	kg	Article no.
Tractor triangle hitch CAT 2	35	3519900
Tractor triangle hitch CAT 2 standard	34	3519970
Triangle hitch	15	3519910

## ADAPTERS

### WEIDEMANN TO EURO



### SCHÄFFER TO EURO



### ADAPTER PLATE WITHOUT HOOK AND EYE



All devices with EURO attachment can be driven with the adapter plate.  
Load capacity 1000 kg

Designation	kg	Article no.
Adapter Schäffer 42 mm (660 mm) <sup>1</sup>	76	3519105
Adapter Schäffer 42 mm (860 mm) <sup>1</sup>	76	3519107
Adapter without attachment <sup>1</sup>	68	3519112

<sup>1</sup> Sale due to model change. Only while stocks last.

## ADAPTERS

### ADAPTER 1 t



Designation	kg	Article no.
Adapter 1 t Weidemann 36 mm (660 mm)	52	3519410
Adapter 1 t Schäffer 34 mm (650 mm)	52	3519415
Adapter 1 t Schäffer 42 mm (660 mm)	52	3519420

### ADAPTER 2.5 t



Only suitable for EURO devices

Individually welded attachments to order - see page 118

Designation	kg	Article no.
Adapter 2.5 t without attachment	79	3519300
Adapter 2.5 t Weidemann 36 mm (660 mm)	94	3519301
Adapter 2.5 t Schäffer 34 mm (650 mm)	89	3519302
Adapter 2.5 t Schäffer 42 mm (660 mm)	97	3519303
Adapter 2.5 t Schäffer 42 mm (860 mm)	97	3519304

Other individually welded attachments available on request (e.g. Weidemann, Schäffer, Volvo, Bobcat,...)

## ADAPTERS

### ADAPTER 3-POINT CAT 2 - EURO



### ADAPTER EURO - THREE-POINT CAT 2



If you also want to attach devices for the 3-point attachment to the front loader with EURO attachment, then use the front loader attachment. Load capacity approx. 1000 kg  
Top link connection may be required



Top link connection

Designation	kg	Article no.
Adapter 1 t 3-point CAT 2 - EURO	65	3519100
Adapter 1 t EURO - three-point CAT 2	70	3519200
Top link connection adapter EURO - three-point CAT 2	2	3519205

### ADAPTER THREE-POINT EURO



- Load capacity 2.5 t
- Attachments can be tilted in three positions
- Side locking mechanism

Designation	kg	Article no.
Adapter 2.5 t 3-point CAT 2 EURO	115	3519390

## ADAPTER EURO - THREE-POINT CAT 2/CAT 3



Illustration shows optional extra equipment

Individually welded attachments to order - see page 118

Designation	kg	Article no.
Adapter 2.5 t EURO - three-point CAT 2/CAT 3	97	3519290
Towing eye and K80 for adapter 2.5 t EURO - CAT 2/CAT 3 three-point	19	3519295
Towing eye for adapter 2.5 t EURO - CAT 2 three-point	11	3519280
K80 for adapter 2.5 t EURO - CAT 2 three-point	16	3519275



Attachment CAT 2 three-point



Attachment towing eye



Attachment K80

## HYDRAULIC COUPLINGS

Plug-in couplings size 3



Connector



Sleeve

Screw couplings size 3



Connector



Sleeve

## FLAT-SEALING PLUG-IN COUPLINGS

Size 3



Connector



Sleeve

Size 2



Connector




Sleeve


Designation	Article no.
Conversion to plug-in coupling sleeve BG3 12L (surcharge for 2 pieces)	2151020
Conversion to screw coupling connector BG3 12L (surcharge for 2 pieces)	2151030
Conversion to screw coupling sleeves BG3 12L (surcharge for 2 pieces)	2151040
Conversion to flat-sealing coupling connector BG3 (surcharge for 2 pieces)	2151050
Conversion to flat-sealing coupling sleeves BG3 (surcharge for 2 pieces)	2151060
Conversion to flat-sealing coupling connector BG2 (surcharge for 2 pieces)	2151070
Conversion to flat-sealing coupling sleeves BG2 (surcharge for 2 pieces)	2151080

Use for all front loader attachment devices with double-acting connection with the exception of weed sweepers and hedge trimmers.

# STANDARD ATTACHMENTS AND COUPLING PLATES

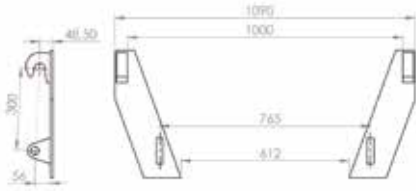


Coupling plates EURO straight

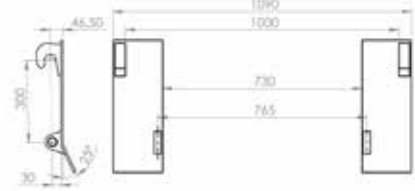


Coupling plates EURO angled


Designation	Article no.
Coupling plates EURO straight	3519095
Coupling plates EURO angled	3519090

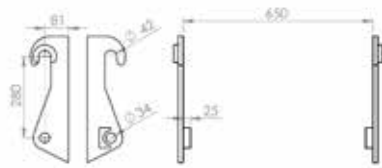


Schäffer 34 mm (650 mm)




Schäffer 42 mm (660 mm)

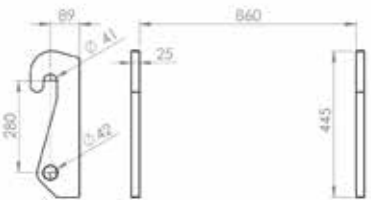


Schäffer 42 mm (860 mm)

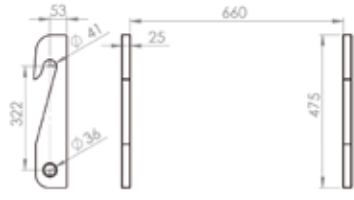

Weidmann 36 mm (660 mm)

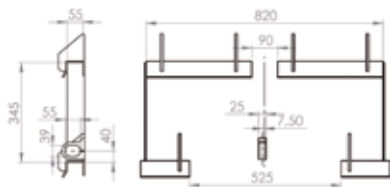

Schäffer plate attachment

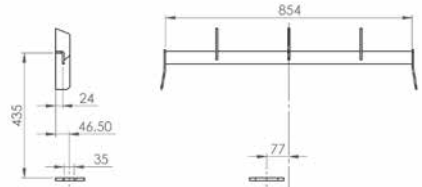

Weidmann plate attachment

## INDIVIDUALLY WELDED ATTACHMENTS

We offer individual attachments that are welded to the body for products marked as such in the catalogue. This enables direct mounting on your loader with the appropriate attachment. The welded attachments can transmit high forces and ensure a robust structure.



Specify the device with the desired attachment when making your enquiry or order.



You will receive a data sheet for the attachment to check compatibility with the loader when you receive the quotation or order confirmation.



Please contact us if you cannot find a suitable attachment for your loader in the overview.

Designation	Article no.
Atlas 32-40	5110090
Atlas AR40 - AR80	5110080
Avant	5110540
Bobcat skid steer loader mini (440)	5110170
Bobcat telehandler	5110180
CAT wheel loader 902-908	5110190
CLAAS Scorpion	5110140
Eurotrac	5110550
Fuchs farmyard loader	5110400
GIANT 565 mm	5110200
GIANT 802 mm	5110205
GIANT plate attachment	5110490
Hauer B (1180 mm)	5110130
Hauer N (1060 mm)	5110135
JCB 406-409	5110210
JCB Compact	5110212
JCB Q-fit	5110217
JLG telescopic loader	5110480
John Deere coupling plates	5110500
Komatsu WA65-85	5110160
Kramer 180 - 350	5110380
Kramer 312-950	5110340
Kramer telescopic loader	5110390
Kramer short	5110345

## INDIVIDUALLY WELDED ATTACHMENTS

Designation	Article no.
Kramer long	5110346
Liebherr 507-509 z-kinematics	5110350
Liebherr L506	5110355
Mailleux	5110570
Manitou	5110100
Massey Ferguson telehandler	5110310
Matbro telescopic loader	5110370
Merlo ZM2	5110110
MultiOne	5110220
Paus	5110450
Schaeff SKL 833-871	5110230
Schäffer 34 mm (650 mm)	3519117
Schäffer 42 mm (660 mm)	3519116
Schäffer 42 mm (860 mm)	3519114
Schäffer plate attachment	3519119
Schäffer wheel loader	5110410
Skid steer	5110250
SMS Trima	5110240
Striegel plate attachment	5110360
Terex telescopic loader	5110590
Terex TL-80-120	5110260
Thaler	5110270
Volvo L20-25	5110120
Volvo L30-35	5110125
Volvo L50-120	5110560
Wacker Neuson Z-HV	5110600
Weidemann 36 mm (660 mm)	3519115
Weidemann 50 mm (845 mm)	5110045
Weidemann plate attachment	3519118
Weidemann wheel loader	5110430
Zeppelin ZL80-120	5110290
Zettelmeyer ZL402	5110300
Zettelmeyer ZL502-602B	5110330
Zettelmeyer ZL802 - ZL1002	5110440

\*Pressure maintenance valve (if required) is not included in delivery

Adapter

Attachments

Indexes

Overview of use case videos

Other attachments are possible on request.  
Please contact us or your dealer and tell us  
what you need!

## D-LOCK BOLTED ATTACHMENTS

D-LOCK bolted attachments mean that devices can be kitted out with the right attachment for the loader based on customer needs.

This enables direct attachment to your loader, without an adapter that unnecessarily builds up in front of the device. It is also possible to change the attachment at a later date.

With D-LOCKS, attachments are also available for devices with a narrow working width. Suitable attachments for a narrower device frame are marked in the overview.



Specify the device with the desired attachment when making your enquiry or order.



You will receive a data sheet for the attachment to check compatibility with the loader when you receive the quotation or order confirmation.



Please contact us if you cannot find a suitable attachment for your loader in the overview.

Designation	D-LOCK	D-LOCKS s	Article no.
Atlas 32-40	✓	✓	5120090
Atlas AR40 - AR80	✓	-	5120080
Avant	✓	✓	5120540
Bobcat skid steer loader mini (440)	✓	✓	5120170
Bobcat telehandler	✓	✓	5120180
CASE	✓	-	5120320
CAT wheel loader 902-908	✓	-	5120190
CLAAS Scorpion	✓	-	5120140
DIECI AGRI Pivot T40 - T70	✓	✓	5120420
Eurotrac	✓	-	5120550
EURO attachment	✓	-	5129990
Fuchs farmyard loader	✓	✓	5120400
GIANT 565 mm	✓	✓	5120200
GIANT 802 mm	✓	-	5120205
JCB 406-409	✓	✓	5120210
JCB compact	✓	-	5120212
JCB Q-fit	✓	-	5120217
JCB Q-fit Agri	✓	-	5120215

## D-LOCK BOLTED ATTACHMENTS

Designation	D-LOCK	D-LOCKS s	Article no.
Komatsu WA65-85	✓	-	5120160
Kramer short	✓	✓	5120345
Kramer long	✓	-	5120346
Kramer 180 - 350	✓	✓	5120380
Kramer 312-950	✓	-	5120340
Kramer telescopic loader	✓	-	5120390
Liebherr 507-509 z-kinematics	✓	-	5120350
Liebherr L506	✓	-	5120355
Manitou	✓	-	5120100
Massey Ferguson telehandler	✓	✓	5120310
Merlo ZM2	✓	-	5120110
MultiOne	✓	✓	5120220
Schaeff SKL 833-871	✓	-	5120230
Schäffer 34mm (650 mm)	✓	✓	5120030
Schäffer 42mm (660 mm)	✓	✓	5120010
Schäffer 42 mm (860 mm)	✓	-	5120020
Schäffer plate attachment	✓	✓	5120035
Schäffer wheel loader	✓	-	5120410
Skid steer	✓	-	5120250
SMS Trima	✓	✓	5120240
Striegel plate attachment	✓	✓	5120360
Terex TL-80-120	✓	-	5120260
Thaler	✓	✓	5120270
Volvo L20-25	✓	✓	5120120
Volvo L30-35	✓	-	5120125
Volvo L50-120	✓	-	5120560
Wacker Neuson Z-HV	✓	-	5120600
Weidemann 36 mm (660 mm)	✓	✓	5120040
Weidemann 50 mm (845 mm)	✓	✓	5120045
Weidemann plate attachment	✓	✓	5120050
Weidemann wheel loader	✓	-	5120430
Yanmar V80-100	✓	-	5120280
Zeppelin ZL80-120	✓	-	5120290
Zettelmeyer AL 802Si	✓	-	5120335
Zettelmeyer ZL402	✓	✓	5120300
Zettelmeyer ZL502-602B	✓	-	5120330
Zettelmeyer ZL802 - ZL1002	✓	-	5120440

\*Pressure maintenance valve (if required) is not included in delivery


Adapter

Attachments

Indexes

Overview of use case videos

# INDEX

Products	Page
Adapter 1 t Weidemann	113
Adapter 1t 3-point CAT 2 - EURO	113
Adapter 1t EURO - three-point CAT 2	114
Adapter 2.5 t 3-point CAT 2 EURO	114
Adapter 2.5 t EURO - three-point CAT 2	115
Adapter 2.5 t Weidemann	113
Adapter 2.5 t without attachment	113
Adapter for 1 t Schäffer	113
Adapter for 2.5 t Schäffer	113
Adapter Schäffer	112
Adapter without attachment	112
Auger	102
Bale cutting bucket	42
Bale transport fork	40
Bale transport fork 3-point	39
Bale transport fork 3-point hinged	39
Big Bag holder Euro	48
Box scraper	49
Bulk material bucket EURO	27
Comfort snow blade	60
Comfort snow blade collision protection	61
Comfort snow plough	63
Concrete mixer 750 l	103
Crate rotating device	47
Drum mower 	90
EURO container standard 2.0 m	71
Fodder clearing machine	48
Folding maize leveller	96
Fork-and-grab farmyard loader	34
Forklift snow blade	59
Front packer	87
Galvanised work platform	23
Grassland harrow 2 m	74
Grassland harrow 3 m	74
Grassland harrow 4 m	74
Grassland harrow 5 m	74
Grassland harrow 6 m	75
Grassland harrow 8 m	75
Grassland harrow HD	78
Grassland harrow HDO	79

# INDEX

Products	Page
Grassland harrow with tine section	76
<b>GREEN.RAKE</b> mini	73
<b>GREEN.ROLLER</b> classic	83
<b>GREEN.ROLLER</b> GREEN.ROLLER classic chassis	84
<b>GREEN.ROLLER</b> eco	85
Hedge trimmer MC190	18
Hydraulic bale transport fork EURO	41
Hydraulic couplings	116
Hydraulic levelling blade	100
Lawn roller	85
Light goods bucket compact	31
Light goods bucket EURO	24
Light goods bucket farmyard loader	33
Log gripper Combi	107
Log gripper Combi Rotator	106
Maize leveller	95
Manure and silage fork EURO	28
Manure bucket EURO	29
Manure fork EURO	27
Manure fork with pawl attachment	24
Municipal snow blade	58
Municipal snow plough	62
Pallet fork	44
Pallet thumb	46
Power grab shovel bucket compact	31
Power grab shovel bucket EURO	30
Power grab shovel bucket EURO	30
Rear container HD	66
Rear container hydraulic	70
Rear container mechanical	69
Rear container standard	68
Rear weight CAT 2 - grey	110
Reinforced concrete weight	108
Reinforced concrete weight box	109
Reinforced concrete weight CAT 0-1 - grey	110
Reinforced concrete weight municipal triangle - grey	108
Riding arena surface rake	101
Round bale fork 3-point	38
Round bale fork Combi	37
Round bale fork DUO	38

Adapter

Attachments

Indexes

Overview of use case videos

# INDEX

Products	Page
Round bale fork solo hydraulic	36
Round bale fork solo mechanical	36
Round bale gripper EURO	35
Rubber scraper 2.6 m 3-point/forklift	52
Rubber scraper 2.6 m 70°	56
Rubber scraper 2.6 m Combi	54
Rubber scraper 2.6 m D-LOCK textile inlay	51
Rubber scraper 2.6 m EURO/forklift	52
Rubber scraper 2.6 m power grab shovel bucket attachment	51
Rubber scraper 3.0 m, pendulum-mounted	54
Rubber scraper 3.6 m Combi	53
Rubber scraper 3.6 m D-LOCK	53
Rubber scraper D-LOCK steel inlay	51
Rubber scraper EURO	50
Rubber scraper, mechanical	55
Screw conveyor	104
Silage roller basic	94
Silage roller pro	92
Soil bucket EURO	26
Soil bucket farmyard loader	32
Soil bucket with pawl attachment	24
Square pasture feeder palisade feeding grating	105
Standard HD sweeper	7
Standard sweeper	6
Stratos Profi sweeping machine	12
Stratos sweeping machine	8
Swing arm mower 2 m	91
Telescopic maize leveller	98
<b>TERRA.ROLLER eco</b>	88
Three-point with trailer-hitch ball	111
Timber grab EURO	107
Tractor triangle hitch	111
Transport box	64
Transport box HD	65
Triangle hitch	111
Wedge-shaped rubber scraper	56
Weed sweeper	17
Work platform	22



## QUALITY FROM OUR OWN MANUFACTURING

With its own factory in Western Ukraine, düvelsdorf is able to monitor every production step precisely and thus ensure the highest quality. Specially trained employees take great care in manufacturing the individual machines. Only high-quality functional materials are used.

This lays the foundation for the robust and durable machines from the start with the production of individual parts. Final assembly, storage and order picking are all carried out centrally at the company's headquarters in Germany. The final quality check is also carried out there. Only once that is completed can the machines and equipment be sent to the customer.

## OVERVIEW OF USE CASE VIDEOS

Hydraulic bale  
transport fork



Box scraper



Front packer  
with knife roller



Power grab  
shovel bucket



Grassland harrow  
with tine section



Rear container  
HD as high-  
dump shovel



Hedge trimmer  
MC 190



Stratos Profi  
sweeping  
machine



Instruction video  
SEED.CON



Silage roller  
Pro



Drum mower  
dCUT 2.10 m







# **düvelsdorf**

Machinery and equipment for agriculture and forestry

Düvelsdorf Handelsgesellschaft mbH · Im Forth 10 · 28870 Ottersberg, Germany

Tel.: +49 4205 3162 0 - Fax: +49 4205 3162 20 · [info@duevelsdorf.de](mailto:info@duevelsdorf.de) · [www.duevelsdorf.de](http://www.duevelsdorf.de)